


**MOBILE HOME  
SITE PREPARATION**

**NEW HOME**

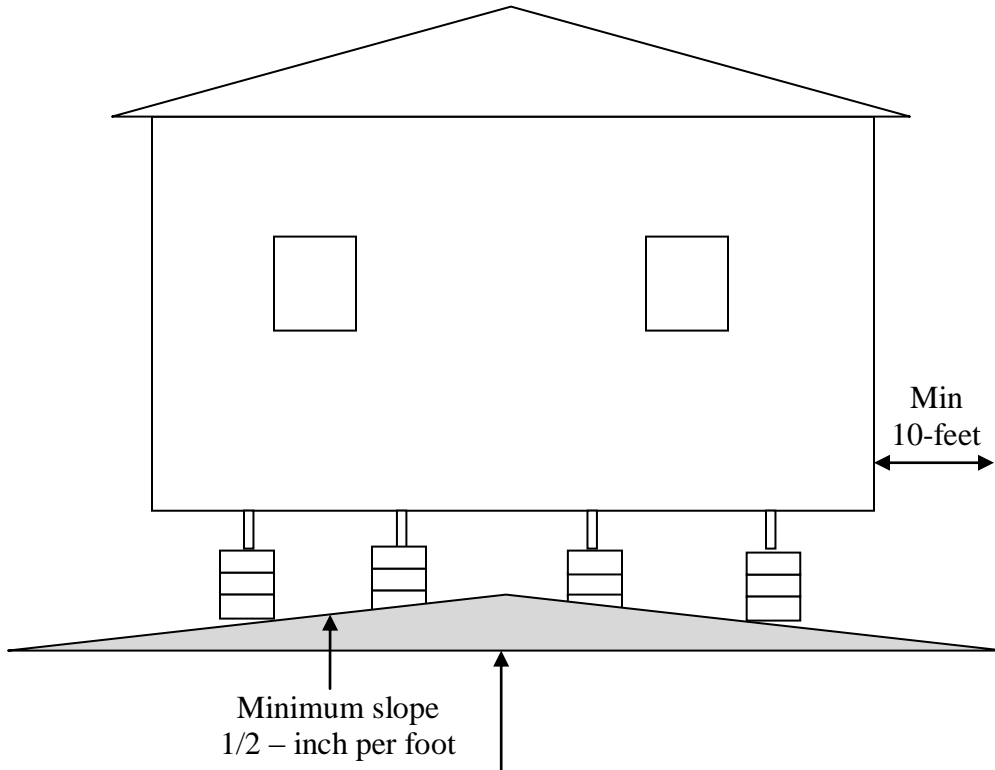

1. Grade site so that there is a minimum 1/2 inch per foot slope from the middle of the home to a distance not less than 10 feet from the outside edge of the home.
2. All fill must be compacted to at least 90% of its maximum relative density.
3. All organic material such as grass, roots, twigs and wood scraps must be removed in areas where the footings are to be placed.

**FOUNDATION MOUND HEIGHT**

Home Width	Mound Height
12 – feet	8 – inches
14 – feet	8.5 – inches
16 – feet	9 - inches

Home Width	Mound Height
24 – feet	11 – inches
28 – feet	12 - inches
32 – feet	13 - inches

**USED HOME**

The area beneath and around the home shall be graded, sloped or properly drained so that water will not accumulate under the home. Vegetation and organic materials must be removed.