

Approved by: \_\_\_\_\_

Department of Engineering & Building  
CITY OF WYANDOTTE  
3200 Biddle Ave., Ste. 200  
(734) 324-4551

Permit #: \_\_\_\_\_

Rec'd By: \_\_\_\_\_

Date: \_\_\_\_\_

### Application for Additions, Alterations, Basements & Foundations

*Location, Ownership, and Detail must be correct, complete, and legible before a Building Permit will be issued.*

Date: \_\_\_\_\_

**Building Located At:** \_\_\_\_\_

Lot No. & Subdivision: \_\_\_\_\_

Applicant's Name: \_\_\_\_\_

Address: \_\_\_\_\_  
\_\_\_\_\_

Phone #: \_\_\_\_\_

Owner's Name: \_\_\_\_\_ Address: \_\_\_\_\_

Lot Size: \_\_\_\_\_ feet WIDE (x) \_\_\_\_\_ Owner's Phone #: \_\_\_\_\_  
Interior Lot ( ) Corner Lot ( ) Alley: \_\_\_\_\_ feet WIDE Rear Alley ( ) Side Alley ( )  
Building Size: \_\_\_\_\_ feet WIDE (x) \_\_\_\_\_ feet LONG (x) \_\_\_\_\_ feet HIGH \_\_\_\_\_ Stories  
Space Between House & Alley: \_\_\_\_\_ feet Between House & Building on Rear: \_\_\_\_\_ feet  
Width of Yards: Front: \_\_\_\_\_ feet Side \_\_\_\_\_ feet Side \_\_\_\_\_ feet

Show details as to location and sizes of all or any buildings and yard spaces on application for Certificate of Occupancy. Plans may be required for this work.

STATE CLEARLY THE NATURE OF THE PROPOSED WORK:

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Plan Review Fee: \$ \_\_\_\_\_ (to be paid when applying)

Estimated Cost by Department: \$ \_\_\_\_\_ Estimated Cost by Owner: \$ \_\_\_\_\_

Section 23a of the state construction code act of 1972, 1972 PA 230, MCL 125.1523A, prohibits a person from conspiring to circumvent the licensing requirements of this state relating to persons who are to perform work on a residential building or a residential structure. Violators of section 23a are subjected to civil fines.

**X**

\_\_\_\_\_  
Signature of Owner or Authorized Agent

City of Wyandotte  
Department of Engineering & Building  
3200 Biddle Avenue, Suite 200  
(734) 324-4551

In accordance with Section 2006 of the Zoning Ordinance, application is hereby made for a Certificate of Occupancy for a \_\_\_\_\_.

(single, 2-family, multiple dwelling, garage, addition, kind of business, etc...)

Located at: \_\_\_\_\_.

**PLOT PLAN**


Note: SHOW SIZE OF ALL BUILDINGS & YARD DIMENSIONS  
ON PLOT. ALSO DESIGNATE VEHICLE STORAGE SPACE.

Inside Lot Line ( )

Side Street ( )

Or Alley ( )

Front Lot  
Line

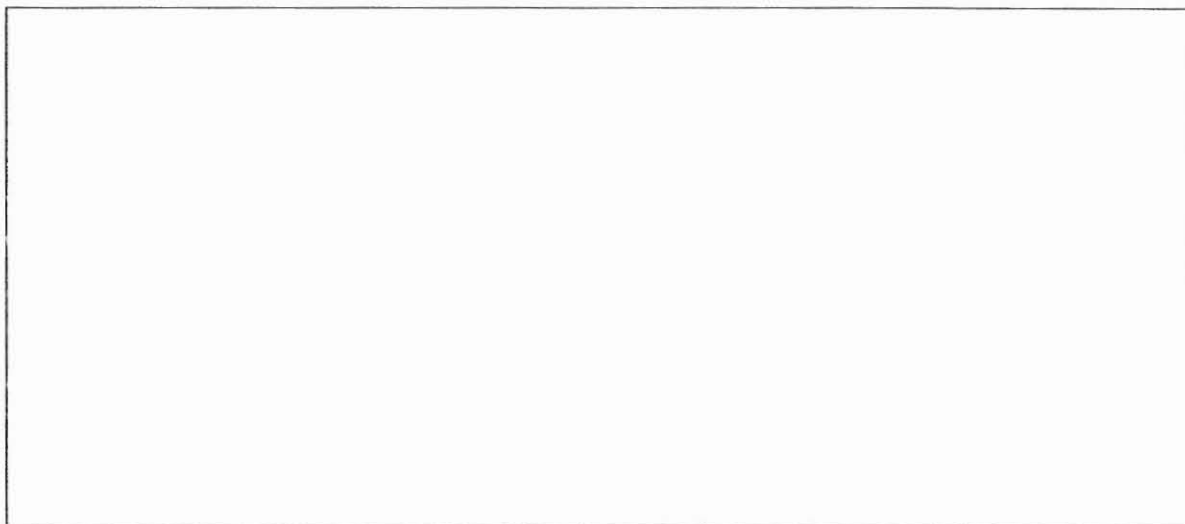

Rear Lot Line

Alley: open ( ) vacated ( )

Inside Lot Line ( )

Side Street ( )

Or Alley ( )

Owner: \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_

Phone No.: \_\_\_\_\_

**Authorized Signature:** \_\_\_\_\_

Address: \_\_\_\_\_

City: \_\_\_\_\_

Phone No.: \_\_\_\_\_

\*\*\*\*\*

**For Office Use Only**

Zoning District: \_\_\_\_\_

Examined By: \_\_\_\_\_

Date: \_\_\_\_\_

Lot Size: \_\_\_\_\_ Area in Sq. Feet: \_\_\_\_\_

Max. Area Of Occupancy: \_\_\_\_\_ Area Of Exist. Struc.: \_\_\_\_\_

Area Of Prop. Struc.: \_\_\_\_\_ Total Area: \_\_\_\_\_

Parking Provided For: \_\_\_\_\_ Parking Required: \_\_\_\_\_

Approved By: \_\_\_\_\_ Refused Because Of Non-Compliance to Section: \_\_\_\_\_

A) Vacated alley with \_\_\_\_\_ feet non-buildable easement

B) Open alley.

**Thomas R. Woodruff**  
CITY ASSESSOR



## COUNCIL

**Sheri Sutherby Fricke  
Daniel E. Galeski  
Ted Miciura, Jr.  
Leonard T. Sabuda  
Donald C. Schultz  
Lawrence S. Stec**

**MARK A. KOWALEWSKI, P.E.**  
**CITY ENGINEER**



CITY OF WYANDOTTE  
DEPARTMENT OF ENGINEERING AND BUILDING  
WYANDOTTE, MICHIGAN 48192  
734.324.4551  
734.324.4535 FAX  
engineering1@wyan.org

PUBLIC ACT 135 OF 1989

CONTRACTOR INFORMATION

Name: \_\_\_\_\_

Phone: \_\_\_\_\_

Address: \_\_\_\_\_  
\_\_\_\_\_

Fax: \_\_\_\_\_

Contractor's License #: \_\_\_\_\_

Exp. Date: \_\_\_\_\_

E-Mail Address: \_\_\_\_\_

Federal Employer ID Number or  
Reason for Exemption: \_\_\_\_\_

Workers' Comp. Insurance Carrier or  
Reason for Exemption: \_\_\_\_\_

MESC Employer Number or  
Reason for Exemption: \_\_\_\_\_

Section 23a of the state construction code act of 1972, 1972 PA 230, MCL 125.1523A, prohibits a person from conspiring to circumvent the licensing requirements of this state relating to persons who are to perform work on a residential building or a residential structure. Violators of section 23a are subjected to civil fines.

Date: \_\_\_\_\_ Authorized Signature: \_\_\_\_\_

**LIMITED POWER OF ATTORNEY (attached) MUST BE SUPPLIED WHEN REGISTERING.**

**Registration Fee: \$45.00 (Registration expires when license expires)**

**Copy of license and driver's license to be attached.**

**Receipt/Check # \_\_\_\_\_**

## OFFICIALS

William R. Griggs  
CITY CLERK

Todd M. Browning  
CITY TREASURER

Thomas R. Woodruff  
CITY ASSESSOR



MARK A. KOWALEWSKI, P.E.  
CITY ENGINEER

MAYOR  
Joseph R. Peterson

## COUNCIL

Sheri Sutherby Fricke  
Daniel E. Galeski  
Ted Miciura, Jr.  
Leonard T. Sabuda  
Donald C. Schultz  
Lawrence S. Stec

**TO: All Builders**

**FROM: Gregory J. Mayhew, Assistant City Engineer**

**RE: Accessibility for Inspectors**

It is the responsibility of the permit holder to provide adequate and safe accessibility to all areas requiring inspections in accordance with the Michigan Building Code Section 110, Inspections and Chapter 33, Safeguards During Construction.

A clean, safe walkway shall be provided to the site/building from the abutting streets and/or sidewalks. Smooth boards are not acceptable as they can be dangerous during wet, snowy, or icy conditions. Additionally, clean, safe access to all areas requiring inspection in and around the site/building shall be provided, including ladders.

**In general, access must be supplied by providing proper pathways, ladders, etc. Failure to provide adequate and safe accessibility will result in no inspection being performed and a re-inspection fee being charged to return when the proper access is provided.**

h/access



## BUILDING PERMIT FEES

### Residential Building Permit Fees

Base Fee.....	50.00
Plus \$13.00 per \$1,000 to \$250,000 (starting at \$0)	
Plus \$15.00 per \$1,000 above \$250,000	
Reinspection fee for permit inspections (each inspection) .....	40.00

### Commercial Building Permit Fees

Base Fee.....	50.00
Plus \$16.00 per \$1,000 to \$250,000 (starting at \$0)	
Plus \$18.00 per \$1,000 above \$250,000	
Reinspection fee for permit inspections (each inspection) .....	50.00

### Building Bond Fees

One and two family dwellings .....	1,000.00
Multiple dwellings - each unit .....	500.00
Commercial/Industrial .25 (25 cents) per sq. ft. (each floor) - minimum .....	1,000.00

### Wrecking/Demolition Permit Fees

Accessory buildings (each building).....	50.00
Residential one and two family dwelling.....	150.00
Multiple, commercial, industrial buildings.....	300.00
Reinspection fee demolition (each inspection) .....	100.00

### Appeal Fees (fees are non-refundable)

	Residential	Commercial
Zoning Board of Appeals	200.00	400.00
Building Board of Appeals	100.00	200.00
Rezoning	300.00	600.00
Special Approval	125.00	200.00
Rezoning Plan Development	1,000.00	1,000.00

### Plan Review Fees

	Residential	Commercial
Parking Lots	50.00	75.00 (less than 6 spaces)
Parking Lots		150.00 (more than 6 spaces)
New Buildings	225.00	300.00
Garage	50.00	50.00
Additions	100.00	100.00
Utility Review (per block)	150.00	150.00
Site Plan Development	750.00	750.00
Preliminary PD Review	400.00	400.00
Final PD Review	300.00	300.00

Residential

200.00

100.00

Effective 10-15-12

### BUILDING PERMIT FEES

Registration of Residential Builders License.....	15.00
Administration Fee .....	30.00
Late Fee.....	125.00

#### Sign

Each Sign .....	40.00
Signs requiring foundation inspection .....	80.00
Each Reinspection.....	40.00

#### Concrete Fees

Driveways, new or replacement .....	50.00
Sidewalks, new or replacement:	
1 foot up to 50 feet .....	40.00
50 feet and up - \$40.00 plus \$1.00 per additional foot	
Curb Cuts, new or replacement:	
Up to 12 feet in length .....	50.00
12 feet and up - \$50.00 plus \$1.00 per additional foot	

#### Miscellaneous Fees.

Use of Street Right-of-Way .....	250.00
Grant of License Processing .....	200.00

#### Moving Structure Fees


Residential.....	500.00
Commercial.....	2,000.00

Effective 10-15-12

### R311.5.6.3 Handrail grip size.

All required handrails shall be of one of the following types or provide equivalent graspability. **DRAWING 28.**



Profiles other than Type I and Type II may be determined to provide equivalent graspability.

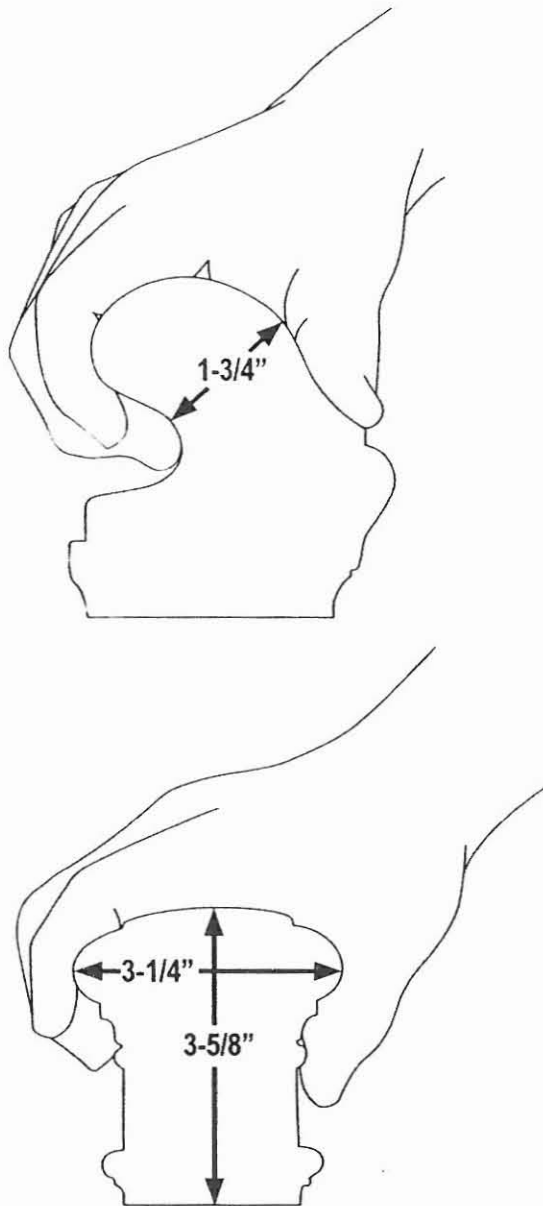

**DRAWING 28**





1. Type I. Handrails with a circular cross section shall have an outside diameter of at least 1 1/4 inches (32 mm) and not greater than 2 inches (51 mm).

**PHOTO 29.** If the handrail is not circular it shall have a perimeter dimension of at least 4 inches (102 mm) and not greater than 6 1/4 inches (160 mm) with a maximum cross section of dimension of 2 1/4 inches (57 mm). **PHOTO 30.**

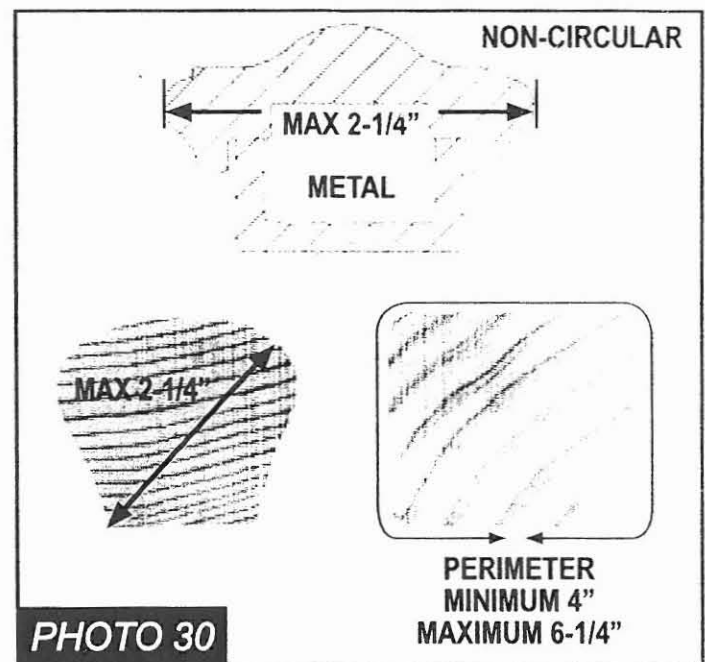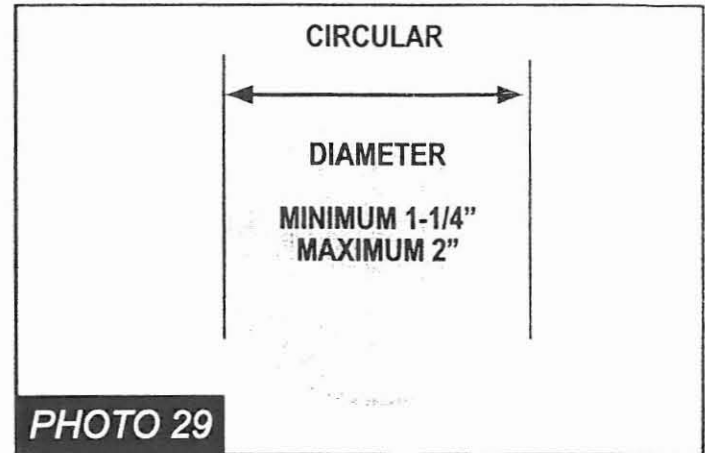



2. Type II. Handrails with a perimeter greater than 6¼ inches (160mm) shall provide a graspable finger recess area on both sides of the profile. **PHOTO 31.** The finger recess shall begin within a distance of ¾ inch (19 mm) measured vertically from the tallest portion of the profile and achieve a depth of at least 5/16 inch (8mm) within 7/8 inch (22mm) below the widest portion of the profile. **PHOTO 32.** This required depth shall continue for at least ¾ inch (10mm) to a level that is not less than 1¾ inches (45 mm) below the tallest portion of the profile. **PHOTO 33.** The minimum width of the handrail above the recess shall be 1¼ inches (32 mm) to a maximum of 2¾ inches (70 mm). **PHOTO 34.** Edges shall have a minimum radius of 0.01 inches (0.25 mm). **PHOTO 34.**

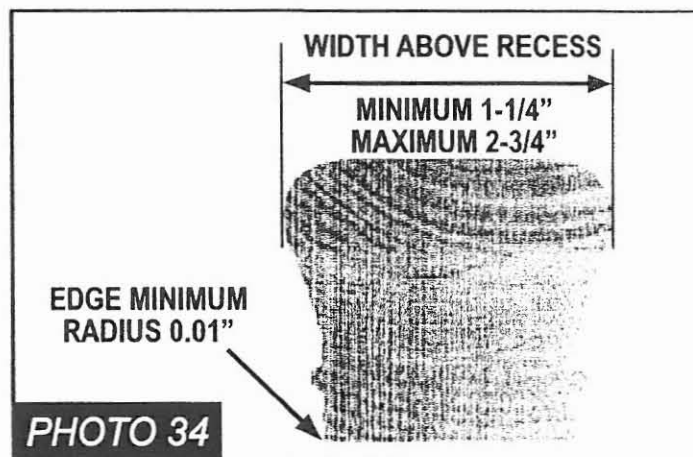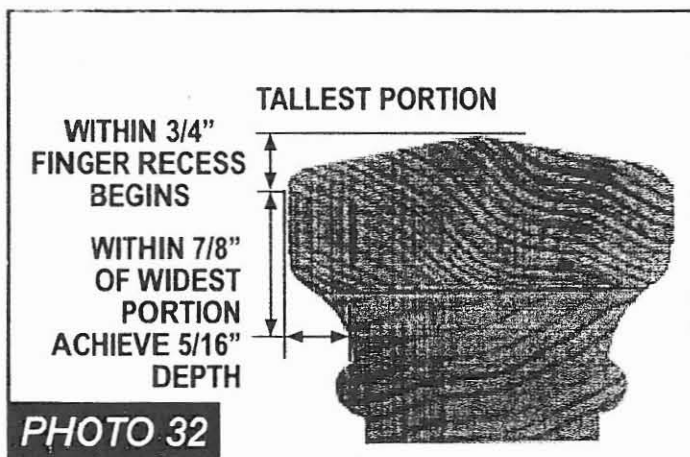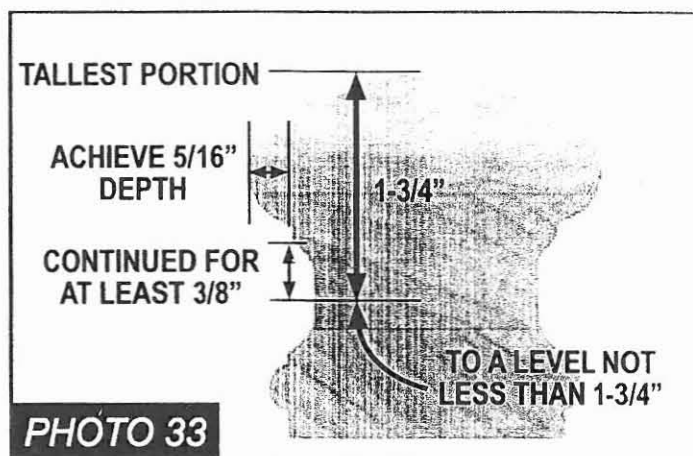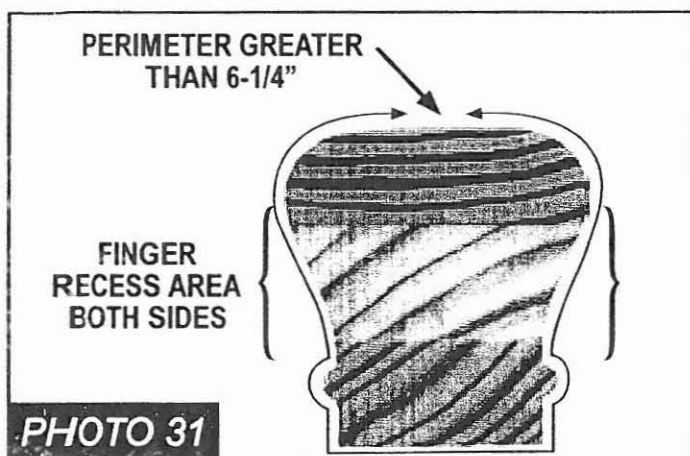

#### R311.5.7 Illumination.

All stairs shall be provided with illumination in accordance with Section R303.6.

Figure 30. Stair Guard Requirements


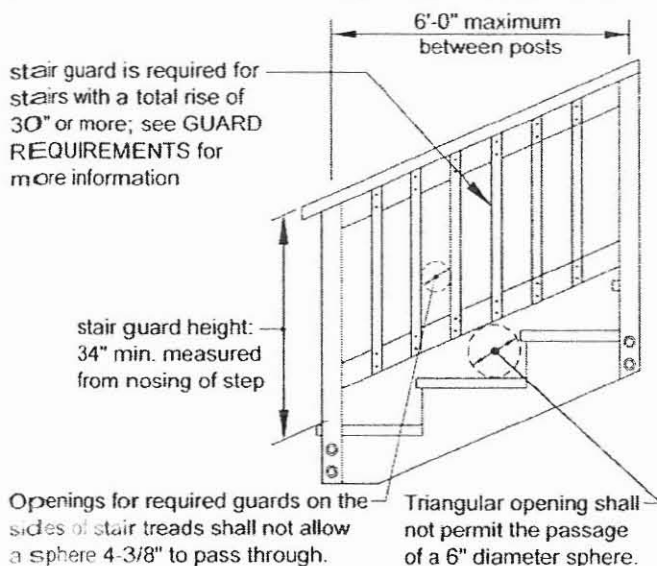


Figure 31. Stair Stringer Attachment Detail

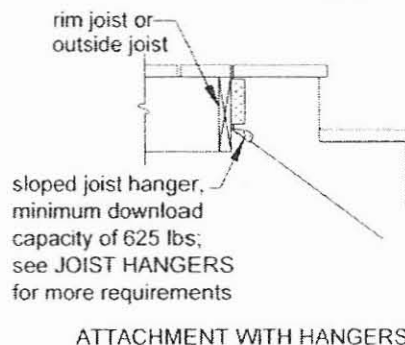

### STAIR HANDRAIL REQUIREMENTS

All stairs with 4 or more risers shall have a handrail on at least one side (see Figure 32A) [R311.7.7]. The handrail height measured vertically from the sloped plane adjoining the tread nosing shall be not less than 34 inches and not more than 38 inches (see Figure 30) [R311.7.7.1]. Handrails shall be graspable and shall be composed of decay-resistant and/or corrosion resistant material. Handrails shall be Type I, Type II, or provide equivalent graspability (see Figure 32B). Type I shall have a perimeter dimension of at least 4" and not greater

than 6-1/4". Type II rails with a perimeter greater than 6-1/4" shall provide a graspable finger recess area on both sides of the profile [R311.7.7.3]. All shapes shall have a smooth surface with no sharp corners. Handrails shall run continuously from a point directly over the lowest riser to a point directly over the highest riser and shall return to the guard at each end (see Figure 33). Handrails may be interrupted by guard posts at a turn in the stair [R311.7.7.2].

Figure 32A. Handrail Mounting Examples




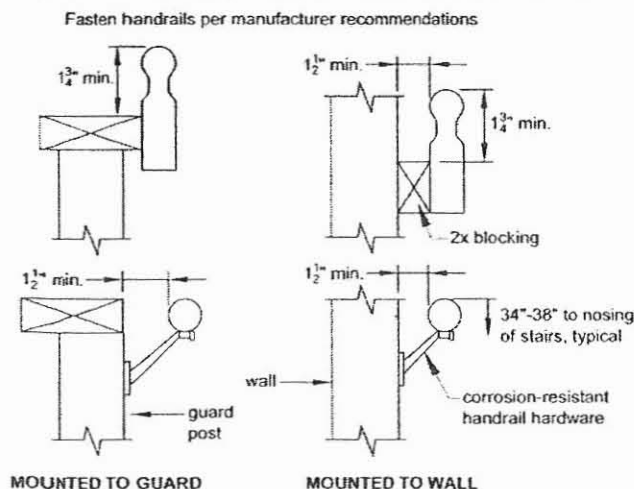


Figure 32B. Handrail Grip Size


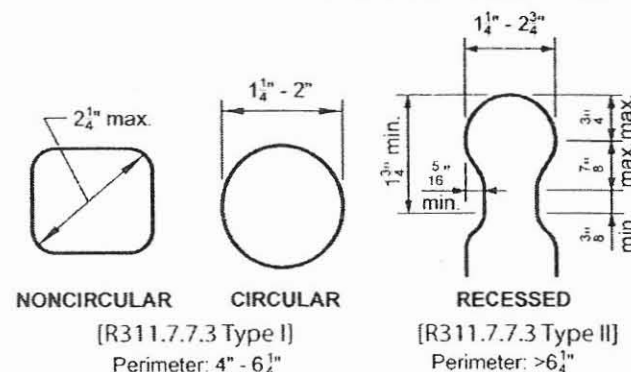



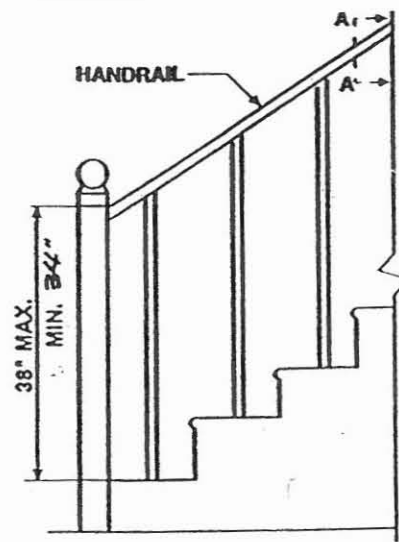


—NOTE—  
VERTICAL MEASUREMENT  
MADE AT THE LEADING  
EDGE OF THE TREAD

FIGURE 315.1  
HANDRAILS


For SI: 1 inch = 25.4 mm.

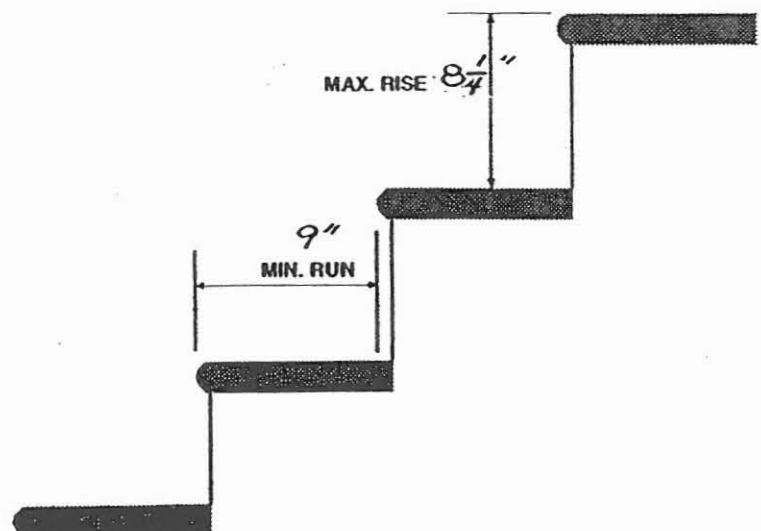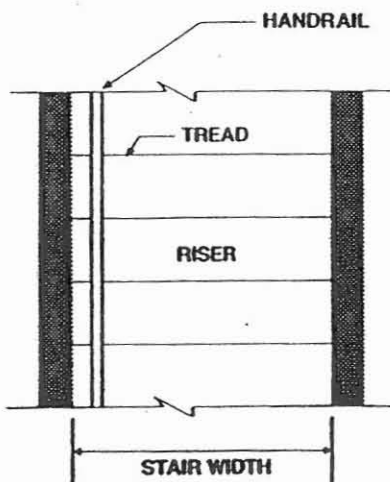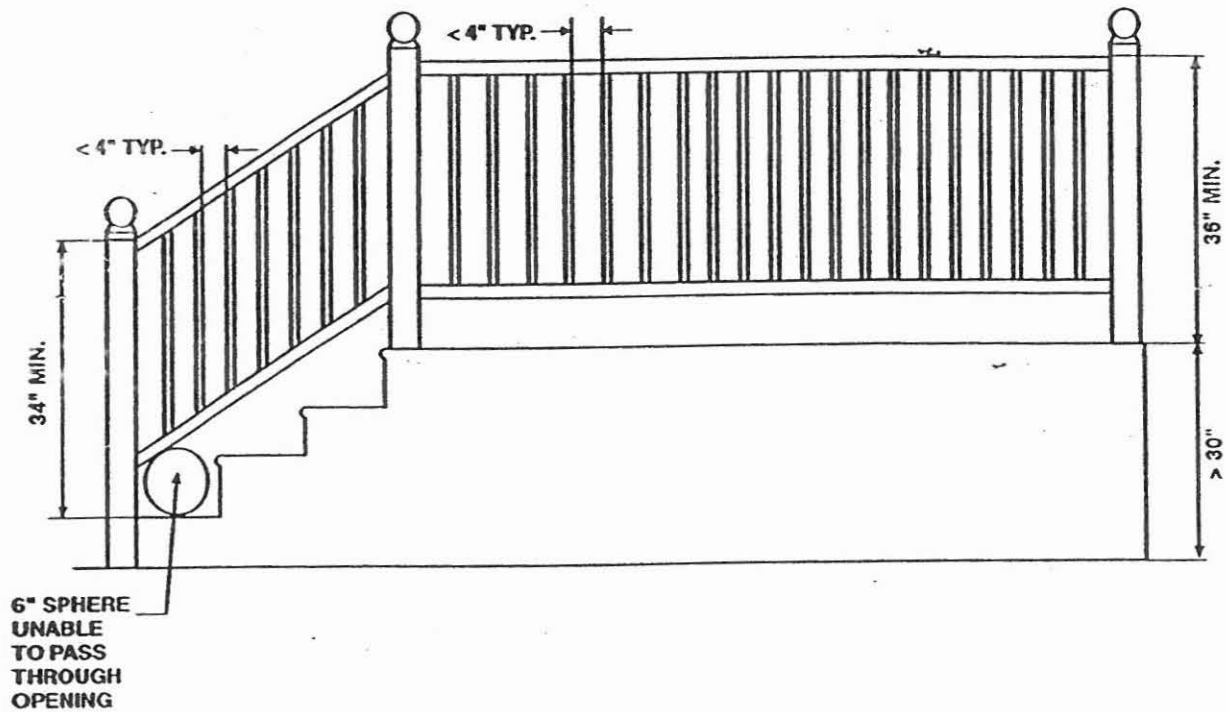

INDICATE DIMENSIONS AT ALL ARROWS.

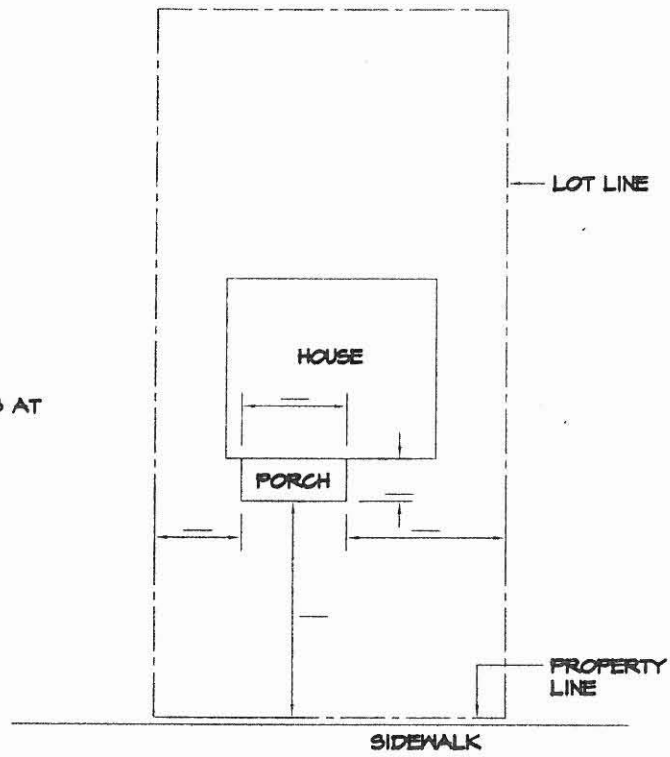

INDICATE HOW MANY STEPS \_\_\_\_\_

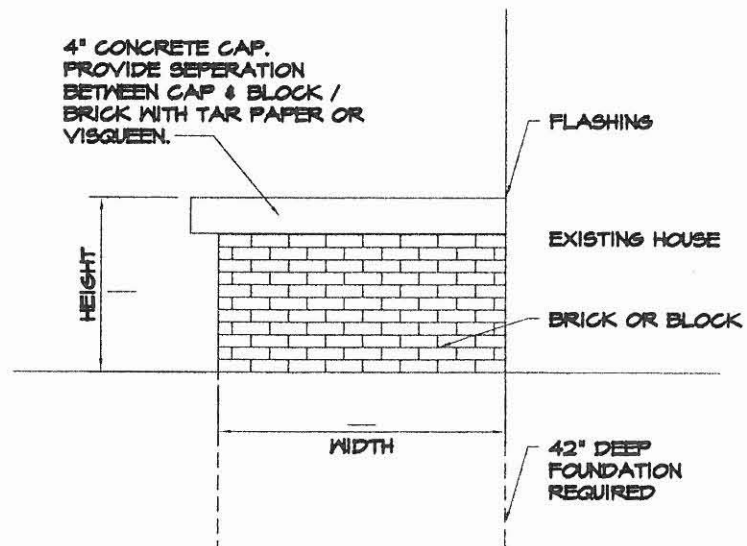

The width of each landing shall not be less than the door served. Every landing shall have a minimum dimension of 36 inches (914 mm) measured in the direction of travel.

**R311.4.4 Type of lock or latch.** All egress doors shall be readily openable from the side from which egress is to be made without the use of a key or special knowledge or effort.

### **R311.5 Stairways.**

**R311.5.1 Width.** Stairways shall not be less than 36 inches (914 mm) in clear width at all points above the permitted handrail height and below the required headroom height. Handrails shall not project more than 4.5 inches (114 mm) on either side of the stairway and the minimum clear width of the stairway at and below the handrail height, including treads and landings, shall not be less than 31.5 inches (787 mm) where a handrail is installed on one side and 27 inches (698 mm) where handrails are provided on both sides.

**Exception:** The width of spiral stairways shall be in accordance with Section R311.5.8.

**R311.5.2 Headroom.** The minimum headroom in all parts of the stairway shall not be less than 6 feet 8 inches (2036 mm) measured vertically from the sloped plane adjoining the tread nosing or from the floor surface of the landing or platform.

### **R311.5.3 Stair treads and risers.**

**R311.5.3.1 Riser height.** The maximum riser height shall be  $8\frac{1}{4}$  inches (210 mm). The riser shall be measured vertically between leading edges of the adjacent treads. The greatest riser height within any flight of stairs shall not exceed the smallest by more than  $\frac{3}{8}$  inch (9.5 mm).

**R311.5.3.2 Tread depth.** The minimum tread depth shall be 9 inches (229 mm). The tread depth shall be measured horizontally between the vertical planes of the foremost projection of adjacent treads and at a right angle to the tread's leading edge. The greatest tread depth within any flight of stairs shall not exceed the smallest by more than  $\frac{3}{8}$  inch (9.5 mm). Winder treads shall have a minimum tread depth of 10 inches (254 mm) measured as above at a point 12 inches (305 mm) from the side where the treads are narrower. Winder treads shall have a minimum tread depth of 6 inches (152 mm) at any point. Within any flight of stairs, the greatest winder tread depth at the 12-inch (305 mm) walk line shall not exceed the smallest by more than  $\frac{3}{8}$  inch (9.5 mm).

R 408.30519

**R311.5.3.3 Profile.** The radius of curvature at the leading edge of the tread shall be no greater than  $\frac{9}{16}$  inch (14.3 mm). A nosing not less than  $\frac{3}{4}$  inch (19 mm) but not more than  $1\frac{1}{4}$  inch (32 mm) shall be provided on stairways with solid risers. The greatest nosing projection shall not exceed the smallest nosing projection by more than  $\frac{3}{8}$  inch (9.5 mm) between two stories, including the nosing at the level of floors and landings. Beveling of nosing shall not exceed  $\frac{1}{2}$  inch (12.7 mm). Risers shall be vertical or sloped from the underside of the leading edge of the tread above at an angle not more than 30 (0.51 rad) degrees from the vertical. Open risers

are permitted, provided that the opening between treads does not permit the passage of a 4-inch diameter (102 mm) sphere.

### **Exceptions:**

1. A nosing is not required where the tread depth is a minimum of 11 inches (279 mm).
2. The opening between adjacent treads is not limited on stairs with a total rise of 30 inches (762 mm) or less.

**R311.5.4 Landings for stairways.** There shall be a floor or landing at the top and bottom of each stairway.

**Exception:** A floor or landing is not required at the top of an interior flight of stairs, provided a door does not swing over the stairs.

A flight of stairs shall not have a vertical rise greater than 12 feet (3658 mm) between floor levels or landings.

The width of each landing shall not be less than the stairway served. Every landing shall have a minimum dimension of 36 inches (914 mm) measured in the direction of travel.

**R311.5.5 Stairway walking surface.** The walking surface of treads and landings of stairways shall be sloped no steeper than one unit vertical in 48 inches horizontal (2-percent slope).

**R311.5.6 Handrails.** Handrails shall be provided on at least one side of each continuous run of treads or flight with four or more risers.

**R311.5.6.1 Height.** Handrail height, measured vertically from the sloped plane adjoining the tread nosing, or finish surface of ramp slope, shall be not less than 34 inches (864 mm) and not more than 38 inches (965 mm).

**R311.5.6.2 Continuity.** Handrails for stairways shall be continuous for the full length of the flight, from a point directly above the top riser of the flight to a point directly above lowest riser of the flight. Handrail ends shall be returned or shall terminate in newel posts or safety terminals. Handrails adjacent to a wall shall have a space of not less than  $1\frac{1}{2}$  inch (38 mm) between the wall and the handrails.

### **Exceptions:**

1. Handrails shall be permitted to be interrupted by a newel post at the turn.
2. The use of a volute, turnout, starting easing or starting newel shall be allowed over the lowest tread.

**R311.5.6.3 Handrail grip size.** All required handrails shall be of one of the following types or provide equivalent graspability.

1. Type I. Handrails with a circular cross section shall have an outside diameter of at least  $1\frac{1}{4}$  inches (32 mm) and not greater than 2 inches (51 mm). If the handrail is not circular it shall have a perimeter dimension of at least 4 inches (102 mm) and not greater than  $6\frac{1}{4}$  inches (160 mm) with a maximum cross section of dimension of  $2\frac{1}{4}$  inches (57 mm).

2. Type II. Handrails with a perimeter greater than  $6\frac{1}{4}$  inches (160 mm) shall provide a graspable finger recess area on both sides of the profile. The finger recess shall begin within a distance of  $\frac{3}{4}$  inch (19 mm) measured vertically from the tallest portion of the profile and achieve a depth of at least  $\frac{5}{16}$  inch (8 mm) within  $\frac{7}{8}$  inch (22 mm) below the widest portion of the profile. This required depth shall continue for at least  $\frac{3}{8}$  inch (10 mm) to a level that is not less than  $1\frac{3}{4}$  inches (45 mm) below the tallest portion of the profile. The minimum width of the handrail above the recess shall be  $1\frac{1}{4}$  inches (32 mm) to a maximum of  $2\frac{3}{4}$  inches (70 mm). Edges shall have a minimum radius of 0.01 inches (0.25 mm).

**R311.5.7 Illumination.** All stairs shall be provided with illumination in accordance with Section R303.6.

**R311.5.8 Special stairways.** Circular stairways, spiral stairways, winders and bulkhead enclosure stairways shall comply with all requirements of Section R311.5 except as specified below.

**R311.5.8.1 Spiral stairways.** Spiral stairways are permitted, provided the minimum width shall be 26 inches (660 mm) with each tread having a  $7\frac{1}{2}$ -inches (190 mm) minimum tread depth at 12 inches from the narrower edge. All treads shall be identical, and the rise shall be no more than  $9\frac{1}{2}$  inches (241 mm). A minimum headroom of 6 feet 6 inches (1982 mm) shall be provided.

**R311.5.8.2 Bulkhead enclosure stairways.** Stairways serving bulkhead enclosures, not part of the required building egress, providing access from the outside grade level to the basement shall be exempt from the requirements of Sections R311.4.3 and R311.5 where the maximum height from the basement finished floor level to grade adjacent to the stairway does not exceed 8 feet (2438 mm), and the grade level opening to the stairway is covered by a bulkhead enclosure with hinged doors or other approved means.

**R311.4.3 Landings at doors.** There shall be a floor or landing on each side of each exterior door.

**Exception:** Where a stairway of two or fewer risers is located on the exterior side of a door, other than the required exit door, a landing is not required for the exterior side of the door.

The floor or landing at the exit door required by Section R311.4.1 shall not be more than 1.5 inches (38 mm) lower than the top of the threshold. The floor or landing at exterior doors other than the exit door required by Section R311.4.1 shall not be required to comply with this requirement but shall have a rise no greater than that permitted in Section R311.5.3.

**Exception:** The landing at an exterior doorway shall not be more than  $7\frac{3}{4}$  inches (196 mm) below the top of the threshold, provided the door, other than an exterior storm or screen door does not swing over the landing.

## SECTION R312 GUARDS

**R312.1 Guards required.** Porches, balconies or raised floor surfaces located more than 30 inches (762 mm) above the floor or grade below shall have guards not less than 36 inches (914 mm) in height. Open sides of stairs with a total rise of more than 30 inches (762 mm) above the floor or grade below shall have guards not less than 34 inches (864 mm) in height measured vertically from the nosing of the treads.

Porches and decks which are enclosed with insect screening shall be provided with guards where the walking surface is located more than 30 inches (762 mm) above the floor or grade below.

**R312.2 Guard opening limitations.** Required guards on open sides of stairways, raised floor areas, balconies and porches shall have intermediate rails or ornamental closures which do not allow passage of a sphere 4 inches (102mm) or more in diameter.

### Exceptions:

1. The triangular openings formed by the riser, tread and bottom rail of a guard at the open side of a stairway are permitted to be of such a size that a sphere 6 inches (152 mm) cannot pass through.
2. Openings for required guards on the sides of stair treads shall not allow a sphere  $4\frac{3}{8}$  inches (107 mm) to pass through.



Final Reading  
# 1130

## CITY OF WYANDOTTE

The City of Wyandotte Zoning Ordinance has been amended as follows:  
AN ORDINANCE TO AMEND THE CITY OF WYANDOTTE ZONING ORDINANCE BY  
AMENDING ARTICLE XIX, ENTITLED "GENERAL EXCEPTIONS", SECTION 1900,  
ENTITLED "AREA, HEIGHT AND USE EXCEPTIONS", SUBSECTION 7.G, TO REQUIRE  
THE INSTALLATION OF A FOUR (4) INCH WIDE BY TWENTY-FOUR (24) INCH DEEP  
RATWALL OR A FOUR (4) INCH CONCRETE FLOOR SLAB WHEN CONSTRUCTING  
OR REPLACING A DECK OR PORCH WITH AN AREA ENCLOSED BELOW THE FLOOR  
LEVEL WITH AN ACCESS DOOR FOR STORAGE:

THE CITY OF WYANDOTTE, WAYNE COUNTY, MICHIGAN ORDAINS:

### Section 1.

The following Section of the City of Wyandotte Zoning Ordinance entitled Article XIX, "General Exceptions", Section 1900, entitled "Area, height and use exceptions", Subsection 7. g, shall be amended to require the installation of a four (4) inch wide by twenty-four (24) inch deep ratwall or a four (4) inch concrete floor slab when constructing or replacing a deck or porch with an area enclosed below the floor level with an access door for storage, and shall read as follows:

7. g. An unenclosed terrace or porch may project into a front yard for a distance not exceeding six (6) feet and may include a fixed canopy or awning, but this shall not be interpreted to include enclosed sides. To construct or replace a deck or porch with an area enclosed below the floor level with an access door for storage, then there must be a four (4) inch wide by twenty-four (24) inch deep ratwall or a four (4) inch concrete floor slab.

### Section 2.

Saving Clause. Nothing in this Ordinance or in the Code hereby adopted shall be construed to affect any suit or proceeding in any court, or any rights acquired, or liability incurred, or any cause or causes of action acquired or existing, under any act or ordinance hereby repealed; nor shall any just or legal right or remedy or any character be lost, impaired or affected by this Ordinance.

### Section 3.

Severability. Should any word, sentence, phrase or any portion of this Ordinance be held in a manner invalid by any court of competent jurisdiction or by any state agency having authority to do so for any reason whatsoever, such holdings shall be construed and limited to such word, sentence, phrase or any portion of the Ordinance held to be so invalid and shall not be construed as affecting the validity of any of the remaining words, sentences, phrases or portions of this Ordinance.

Section 4.

Conflicting Ordinances. All prior existing ordinances adopted by the City of Wyandotte inconsistent or in conflict with the provisions of this Ordinance are, to the extent of such conflict or inconsistency, hereby expressly repealed.

Section 5.

This Ordinance is deemed necessary for the immediate preservation of the public peace, property, health or safety and to prevent and eradicate the infestation of vermin and is necessary for the usual daily operation of the Department of Engineering and Building and therefore it is necessary for this Ordinance to take effect immediately. This Ordinance shall be published in a newspaper generally circulated in the City of Wyandotte within ten (10) days after adoption.


On the question, "SHALL THIS ORDINANCE NOW PASS?", the following vote was recorded:


<u>YEAS</u>	<u>COUNCIL</u>	<u>NAYS</u>
<input checked="" type="checkbox"/>	Browning	_____
<input checked="" type="checkbox"/>	DeSana	_____
<input checked="" type="checkbox"/>	Kolakowski	_____
<input checked="" type="checkbox"/>	Paryaski	_____
<input checked="" type="checkbox"/>	Sutka	_____
<input checked="" type="checkbox"/>	Talluto	_____
	Absent	_____

I hereby approve the adoption of the foregoing Ordinance this 8th day of October, 2001.

**CERTIFICATION**

We, the undersigned, Leonard T. Sabuda and Maria Johnson, respectively, the Mayor and Deputy City Clerk of the City of Wyandotte, do hereby certify that the foregoing Ordinance was duly passed by the City Council of the City of Wyandotte, at a regular session on Monday, the 8th day of October, 2001.

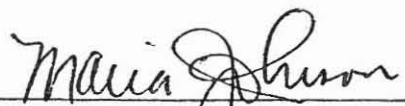  
Maria Johnson, Deputy City Clerk

  
Leonard T. Sabuda, Mayor

The effective date of this Ordinance shall be October 8th, 2001. A copy of this Ordinance may be purchased or inspected at the City of Wyandotte Clerk's Office, 3131 Biddle Avenue, Wyandotte, Michigan, between the hours of 8:00 a.m. and 5:00 p.m., Monday through Friday.