

**ORDINANCE NO. 2012-18**

**AN ORDINANCE REPEALING ORDINANCE NO. 2009-30, SECTION 29 OF THE ZONING ORDINANCE OF THE CITY OF BELTON, REGARDING HERITAGE PRESERVATION OVERLAY DISTRICT; CREATING A NEW SECTION 29, ENTITLED "HISTORIC PRESERVATION OVERLAY DISTRICT" CREATING A HISTORIC PRESERVATION COMMISSION; PROVIDING DEFINITIONS AND TERMS; SETTING FORTH DUTIES AND RESPONSIBILITIES OF THE HISTORIC PRESERVATION COMMISSION; DEFINING DUTIES AND RESPONSIBILITIES OF THE HISTORIC PRESERVATION OFFICER; PROVIDING DESIGN CRITERIA FOR HISTORIC AND LANDMARK PROPERTIES; PROVIDING A PROCESS FOR DESIGNATION OF HISTORIC PROPERTIES; CREATING MINIMUM MAINTENANCE STANDARDS; PROVIDING GUIDELINES FOR OBTAINING A CERTIFICATE OF APPROPRIATENESS; PROVIDING FOR A PENALTY; PROVIDING FOR THE REPEAL OF CONFLICTING PROVISIONS; PROVIDING A SAVINGS CLAUSE; PROVIDING A SEVERABILITY CLAUSE; AND PROVIDING FOR PUBLICATION AND EFFECTIVE DATE.**

**WHEREAS**, CH. 211 TEXAS LOCAL GOVERNMENT CODE, the Municipal Zoning Authority, specifically authorizes zoning functions and procedures for municipalities; and

**WHEREAS**, CH. 211 TEXAS LOCAL GOVERNMENT CODE, Section 211.003(b) provides that in the case of designated places and areas of historical, cultural, or architectural importance and significance, the governing body of a municipality may regulate the construction, reconstruction, alteration, or razing of buildings and other structures.

**WHEREAS**, CH. 211 TEXAS LOCAL GOVERNMENT CODE, Section 211.005(a) authorizes the governing body of a municipality to divide the municipality into districts, within which the governing body may regulate the erection, construction, reconstruction, alteration, repair, or use of buildings, other structures, or land and within which zoning regulation must be uniform for each class or kind of building in a district; however, zoning regulations may vary from district to district.

**WHEREAS**, CH. 214 TEXAS LOCAL GOVERNMENT CODE, Section 214.00111 provides additional authority to preserve substandard buildings as historic property which applies only to a municipality that is designated as a certified local government by the state historic preservation officer as provided by 16 U.S.C.A. Section 470 et seq.

**NOW THEREFORE BE IT ORDAINED BY THE CITY COUNCIL OF THE CITY OF BELTON, TEXAS:**

**SECTION I:** City Ordinance No. 2009-30, dated July 14, 2009, and all subsequent amendments thereto are hereby repealed and are of no further force and effect.

**SECTION II:** That the following Belton Historic Preservation Ordinance is hereby ADOPTED pursuant to CH. 211 TEXAS LOCAL GOVERNMENT CODE.

**29.1. PURPOSE**

The City Council of Belton, Texas, hereby declares that as a matter of public policy, the protection, enhancement, and preservation of landmarks and districts of architectural,

archaeological, cultural, and historic significance is necessary to promote the economic, cultural, educational, and general welfare of the public.

This act is intended to:

protect and enhance the landmarks and districts which represent distinctive elements of Belton's historic, architectural, and cultural heritage;

foster civic pride in the accomplishments of the past;

protect and enhance Belton's attractiveness to visitors and the support and stimulus to the economy thereby provided;

insure the orderly, efficient, and appropriate growth and development of the City;

promote economic stability and prosperity of the community by encouraging the most appropriate use of historic properties within the City; and

encourage stabilization, restoration, and improvements of such properties and their values by offering incentives for rehabilitation.

### **29.3. DEFINITIONS**

*Alteration.* Shall mean any exterior change, demolition, or modification to a property with historic overlay zoning, including but not limited to:

1. Exterior changes to or modifications of structures, architectural details, or visual characteristics;
2. Construction of new structures;
3. Disturbance of archeological sites or areas; or
4. Placement or removal of exterior objects that affect the exterior qualities of the property.

*Applicant.* The owner of record of a property with existing or proposed historic overlay zoning, the agent or lessee thereof with the approval of the owner of record in a notarized form, or a person holding a bona fide contract to purchase the property with approval of the property owner.

*Archeological resource.* A site with archeological or paleontological value in that it has produced or can be expected to produce data affecting theories of historic or prehistoric interest.

*Architectural feature.* The architectural elements embodying style, design, general arrangement, and components of the exterior of any building or structure, including, but not limited to, the kind, color, and texture of the building materials, and the style and type of all windows, doors, lights, signs, and porches.

*Building.* A structure for business or residential use, created to shelter people or things, such as a house, barn, church, hotel, warehouse or similar structure, including a historically related

complex, such as a courthouse and jail or a house and barn. When separated by dividing walls without openings, each portion of such structure so separated shall be deemed a separate building.

*Certificate of appropriateness.* The certificate issued by the City approving alteration, rehabilitation, construction, reconstruction, or improvement of a property with historic overlay zoning.

*Certified local government.* A federal government program authorized by the National Historic Preservation Act, 16 U.S.C. 470 et seq., that provides for the participation of local governments in a federal/state/local government partnership.

*City.* The City of Belton, Texas, as represented by the Mayor and City Council.

*Commission.* The Historic Preservation Commission created under this section.

*Construction.* The addition or placement of any improvement to a property with existing or proposed historic overlay.

*Contributing.* A building, structure, site, or object within a designated historic district which:

- embodies the significant physical features and characteristics of the district, or adds to the historical association, historical architectural qualities, or archeological values identified for the district; and
- was present during the period of significance relating to the documented significance of the district; and
- possesses historic integrity or is capable of yielding important information about the period.

*Dangerous structure.* A structure that poses an imminent threat to public health or safety.

*Demolition.* The complete or partial removal of a building, structure, object, or site, including landscape features and archeological sites.

*Demolition by neglect.* Improper maintenance, neglect in the maintenance of, or lack of maintenance of any structure or property with historic overlay zoning, which results in deterioration of the structure and threatens the preservation of the structure.

*Design guidelines.* The "Design Guidelines for Historic Belton, Texas" as adopted by the City Council and as may be amended from time to time.

*Designation.* The process by which the City Council may designate certain buildings, land, areas, and districts in the City with historic overlay zoning and define, amend, and delineate the boundaries thereof.

*Economic hardship.* The inability of an owner to obtain a reasonable return or a reasonable beneficial use from a property with historic overlay zoning as required by the *United States Supreme Court in Penn Central Transportation Company v. New York City*, 438 U.S. 104 (1978) and subsequent decisions. A reasonable economic return does not have to be the most profitable return possible or allow the highest and best use of the property.

*Historic district.* An area of the City containing a grouping of historic properties that are designated with historic overlay zoning and that may contain properties that are both contributing and non-contributing, but that is united historically or aesthetically. For the purpose of this section, the entirety of an historic district shall have historic overlay zoning.

*Historic landmark.* Any building, structure, object, site, or portion thereof with historic overlay zoning.

*Historic preservation officer.* The Planning Director or his/her designee who shall serve as the historic preservation officer for the City and who shall oversee the historic preservation program for the City.

*Historic resource.* Any building, structure, or object with historic overlay zoning being considered for relocation.

*Improvement.* Any building, structure, or object constituting a physical betterment of real property, or any part of such betterment, including but not limited to streets, alleys, curbs, lighting fixtures, signs and the like.

*Initiated designation.* The historic designation procedure is considered to be initiated immediately when the City Council, the Planning and Zoning Commission, or the Historic Preservation Commission votes to initiate it or, in the case of initiation by the property owner(s), when the designation report is filed with the Planning Director.

*Landscape.* Any improvement or vegetation including but not limited to: shrubbery, trees, plantings, outbuildings, walls, courtyards, fences, swimming pools, planters, gates, street furniture, exterior lighting, and site improvements, including but not limited to subsurface alterations, site regarding, fill deposition, and paving.

*Low-income homeowner.* Any homeowner that meets the U. S. Department of Housing and Urban Development (HUD) qualifications for low income.

*National Historic Landmark.* A district, site, building, structure, and/or object that has been formally designated as a National Historic Landmark by the U.S. Secretary of the Interior and possesses exceptional value or quality in illustrating or interpreting the heritage of the United States in history, architecture, archeology, engineering, and culture and that possesses a high degree of integrity of location, design, setting, materials, workmanship, feeling, and association. National Historic Landmarks are automatically listed in the National Register.

*National Register of Historic Places.* A federal list of cultural resources worthy of preservation, authorized under the National Historic Preservation Act of 1966 as part of a national program to coordinate and support public and private efforts to identify, evaluate, and protect the nation's historic and archeological resources. The National Register Program is administered by the Commission, by the state historic preservation office, and by the National Park Service under the Department of the Interior. Significant federal benefits may accrue to owners of properties listed or determined eligible for listing in the National Register.

*Noncontributing.* A building, site, structure, or object that is located within a designated historic district, but does not add to the historic associations, historic architectural qualities, or archeological values for which the district is significant because:

- it was not present during the period of significance;

- it does not relate to the documented significance of the property; and/or
- due to alterations, disturbances, additions, or other changes, it no longer possesses historic integrity and/or is capable of yielding important information about the period.

*Object.* A material thing of functional, cultural, historical, or scientific value that may be, by nature or design, movable, yet is related to a specific setting or environment.

*Ordinary repair or maintenance.* Ordinary maintenance shall be defined as any work that does not constitute a change in design, material, or outward appearance, and that includes in-kind (same original material) replacement or repair.

*Relocation.* Any changes in the location of a building, object, or structure, either within its present setting or to another setting.

*Secretary of the Interior's Standards for the Treatment of Historic Properties.* A federal document providing standards and guidelines for the appropriate rehabilitation, preservation, restoration, and reconstruction of historic buildings.

*Site.* The location of a significant event, a prehistoric or historic occupation or activity, or a building or structure, whether standing, ruined, or vanished, where the location itself maintains historical or archeological value regardless of the value of any existing buildings, or objects.

*Structure.* A work made up of interdependent and interrelated parts in a definite pattern of organization constructed by man. The term includes, but is not limited to engineering projects, earthworks, and bridges.

#### **29.4. HISTORIC PRESERVATION COMMISSION**

*Number of members, appointment.* The Historic Preservation Commission shall consist of five (5) members. Appointment of members shall be made by the City Council.

*Make-up of the Commission.* A member must be a resident of the City and have lived within the City for a minimum of twelve (12) months immediately prior to appointment.

In making appointments to the Commission, the Council shall attempt to maintain a balance of interest and skills on the Commission by assessing the individual qualifications of the candidates, including, but not limited to, their knowledge and demonstrated interest in preservation-related fields such as architecture, history, archaeology, planning, or urban or community design. All members shall have a knowledge of and demonstrated interest in historic preservation. At least one member shall be an owner-occupant of a property with historic overlay zoning.

Regardless of profession, background, or experience, members of the Commission will require ongoing training and education in architectural history, historic preservation law, and other relevant topics. Initial and annual training for new members, as well as an up-to-date reference manual for Commissioners, shall be provided.

*Terms.* Commission members shall serve for a term of two (2) years, their terms to be staggered, with the exception that for the initial Commission members, the City Council shall appoint the three (3) current members of the Commission for two (2) years, and two (2) new members for a term of three (3) years.

The inaugural Commission shall consist of the following members with terms expiring as stated.

<u>Name</u>	<u>Expiration of Term</u>
Jack Folsom	September 8, 2014
Larry Guess	September 8, 2014
Berneta Peeples	September 8, 2014
New member	September 8, 2015
New member	September 8, 2015

Terms of members shall expire on September 8; provided, however, that members shall continue to serve until their successors are appointed.

*Vacancies.* Vacancies shall be filled by the Mayor, subject to ratification by the City Council, for the unexpired term of any member whose term becomes vacant.

*Removal.* All members of the Commission shall serve at the pleasure of the City Council and may be removed with or without cause upon a majority vote of the City Council.

Any member who misses three consecutive meetings shall forfeit his or her position, and a replacement shall be appointed by the Mayor, subject to ratification by the City Council, to fill the unexpired term.

Any member may resign by submitting a letter of intent to the City Council.

*Election of chair and vice-chair.* The chair and vice-chair of the Commission shall be elected by and from members of the Commission.

*Compensation.* Members shall serve without pay. Members may be reimbursed for actual expenses incurred in the performance of their duties from available funds approved in advance.

*Quorum.* Three members shall constitute a quorum for transactions of business, and no decision shall be rendered without a concurring vote of at least three members.

*Regular meetings.* The Commission shall meet at least monthly, if business is at hand.

*Special meetings.* Special meetings may be called at any time by the Commission chair, vice chair, or at the written request of at least three members, or upon notice from the historic preservation officer or zoning administrator that a matter requires the consideration of the Commission.

*Compliance with Texas Open Meetings Act.* All meetings shall be held in conformance with the Texas Open Meetings Act, Chapter 552 of the Texas Government Code, as amended.

*Rules of Order.* The Commission shall follow Robert's Rules of Order or other rules of procedure as determined by the Commission.

## **29.5. RESPONSIBILITIES OF THE COMMISSION**

The Commission shall be empowered to:

1. Make recommendations to the City for the employment of professional consultants as necessary to carry out the duties of the Commission.
2. Adopt parliamentary rules and procedures necessary to carry out the business of the Commission.
3. Adopt criteria for the evaluation of significance of historic landmarks and rules for the delineation of historic district boundaries, subject to ratification by the City Council.
4. Review and take action on the designation of historic landmarks and the delineation of historic districts, subject to ratification by the City Council.
5. Recommend and confer recognition upon the owners of historic landmarks or properties within historic districts by means of certificates, plaques, or markers.
6. Review and recommend to City Council and other applicable City boards and Commissions all proposed changes to the zoning ordinance, building code, general plan or other adopted policies of the City that may affect the purpose of the ordinance.
7. Implement and maintain a system of survey or inventory of significant historic, architectural, and cultural properties or resources and all properties located within designated historic districts located in the City. Such information shall be maintained securely and made accessible to the public, and should be updated at least every ten (10) years.
8. Monitor and report to the Texas Historical Commission all actions affecting any Recorded Texas Historic Landmark, State Archaeological Landmark, National Register property, and any locally designated property, as deemed necessary.
9. Create sub-committees from among its membership and delegate to these committees such responsibilities as necessary to carry out the purposes of this ordinance.
10. Maintain written meeting minutes, which are recorded by staff and demonstrate all actions taken by the Commission and the reasons for taking such actions.
11. Increase public awareness of the value of historic, cultural, and architectural preservation by developing and participating in public education programs.
12. Review and take action on all certificate of appropriateness applications.
13. Review and take action on all appeals on action taken by the historic preservation officer regarding the administrative review of certificate of appropriateness applications.
14. Develop, prepare, and adopt specific design guidelines, subject to ratification by the City Council, for use in the review of all certificates of appropriateness applications.

15. Prepare and submit annually to the City Council a report summarizing expenditures, goals and objectives, and work completed during the previous year, as well as anticipated budgetary requests.
16. Make recommendations to the City concerning the utilization of state, federal, or private funds to promote the preservation of historic properties within the City.
17. Recommend to City Council the acquisition of historic properties endangered by demolition where their preservation is essential to the purpose of this ordinance and where private preservation is not feasible.
18. Propose incentive program(s) to City Council for the owners of historic properties.
19. Review and take action on all City preservation-related incentive program applications involving work on historic properties, for compliance with adopted "Design Guidelines for Historic Belton, Texas" pursuant to this ordinance.
20. Recommend whether to accept, on behalf of the City government, any donation of preservation easements and/or development rights, as well as any other gift of value for the purpose of historic preservation, subject to the approval of City Council.

## **29.6. HISTORIC PRESERVATION OFFICER**

The City Manager or its designee shall appoint a qualified City official or staff person to serve as Historic Preservation Officer (HPO). The City may utilize in-house staff or contract using those individuals whose expertise are required to deliberate on specific, related matters. In addition, the planning department will be responsible for coordinating the city's preservation activities with those of state and federal agencies and with local state, and national preservation organizations.

*Responsibilities.* The HPO shall be empowered to:

1. Administer this ordinance and advise the Commission on matters submitted to it.
2. Maintain and hold open for public inspection all documents and records pertaining to the provisions of this ordinance.
3. Receive and review all applications pursuant to this ordinance to ensure their completeness.
4. Review and take action on all certificates of appropriateness applications subject to administrative review pursuant to this ordinance.
5. Review and forward with any recommendations all applications for certificates of appropriateness subject to review by the Commission pursuant to this ordinance.
6. Ensure proper posting and noticing of all Commission meetings, schedule applications for Commission review, provide information packets to its members prior to the meetings, record meeting minutes, and facilitate all Commission meetings.
7. Review and help coordinate the City's preservation and urban design activities with those of local, state, and federal agencies and with local, state, and national preservation organizations in the private sector.



## 29.7. CRITERIA FOR DESIGNATION OF HISTORIC PROPERTIES OR DISTRICTS

The Commission shall use criteria for evaluation of significance of an historic landmark or historic district as established by the National Park Service for use in the administration of the National Register of Historic Places. The Commission shall refer to the National Register Bulletin No. 15, *How to Apply the National Register Criteria for Evaluation*, published by the National Park Service, for further guidance in the application of these criteria.

The following criteria shall be considered in determining whether historic overlay zoning should be applied to an individual property or historic district:

- A. Association with events that have made a significant contribution to the broad patterns of our history.
- B. Association with the lives of persons significant in our past.
- C. Embodiment of the distinctive characteristics of a type, period, or method of construction, or that represent the work of a master, or that possess high artistic values, or that represent a significant and distinguishable entity whose components may lack individual distinction.
- D. Archaeological value, in the sense that the property has yielded, or may be likely to yield, information important in prehistory or history.

*Additional criteria for designation of historic districts.* In addition to the general criteria listed above, the Commission shall consider the following.

Where the designation is made based on the general character of the proposed historic district, these findings may include, but shall not necessarily be limited to:

- a. Scale of buildings and structures typical of the area.
- b. Architectural style typical of the area.
- c. Architectural period typical of the area.
- d. Building materials typical of the area.
- e. Colors used in buildings typical of the area.
- f. Signage and street furniture typical of the area.
- g. Landscapes typical of the area.
- h. Typical relationships of buildings to the landscapes in the area.
- i. Typical relationships of buildings in the area to the street.
- j. Setbacks and other physical patterns of buildings in the area.
- k. Typical patterns of rooflines of buildings in the area.
- l. Typical patterns of porch and entrance treatments of buildings in the area.

Where the designation is made based on the character of a limited number of specific buildings in the proposed historic district, the findings may include, but shall not necessarily be limited to:

- a. Architectural style of the buildings.
- b. Architectural period of the buildings.
- c. Textures of materials used in the buildings.
- d. Colors of the materials used in the buildings.
- e. Rooflines of the buildings.

- f. Porch and entrance treatments of the buildings.
- g. Height and mass of the buildings.
- h. Relative proportions of the buildings (width to height, width to depth).

*Already listed properties.* Properties that, as of the date of the adoption of this ordinance, are listed as a Recorded Texas Historic Landmark (RTHL) or State Archeological Landmark (SAL), or that are listed individually or within an historic district on the National Register of Historic Places (NR) shall be considered eligible for designation as historic landmarks pursuant to this ordinance.

The historic preservation officer shall compile a list of such properties and shall initiate an application for historic overlay zoning for each property so identified, pursuant to this ordinance.

The Commission may establish a process by which it identifies additional properties that are so recognized on the National Register or by the State, either on an annual basis or as such properties are listed and that information becomes known to the Commission, and may direct the historic preservation officer to initiate applications for historic overlay zoning for those properties, pursuant to this ordinance.

## **29.8. DESIGNATION PROCESS**

These provisions pertaining to the designation of historic properties constitute a part of the comprehensive zoning plan of the City.

Owners of proposed historic properties shall be notified prior to the Commission hearing on the recommended designation. At the Commission's public hearing, owners, interested parties, and technical experts may present testimony or documentary evidence, which will become part of a record regarding the historic, architectural, or cultural importance of the proposed historic property. The City may designate an historic landmark without the property owner's approval.

The procedure for designating a historic landmark or to establish or amend a historic district may be initiated by the City, or by the individual property owner(s), or by at least 20% of the residents of the potential district. An application for designation shall be made on forms as prescribed by the City and shall be filed with the HPO along with any fees in accordance with the municipal fee schedule. Buildings, structures, sites or areas located within the City which substantially comply with the criteria found in Section 29.7 may be recommended by the Commission to the City Council as historic landmarks or historic districts. The application shall contain:

- For a proposed historic landmark, the name, address, telephone number of applicant, and physical address of the property.
- For a proposed historic district, the name, address, telephone number of applicant, and no more than 50% negative responses from owners of properties in the proposed district, where a poll has been taken, each property is counted separately, and no response is considered an affirmative response.
- Site plan of the proposed landmark property, or map indicating the geographic boundaries of the proposed district, showing all affected buildings and/or structures.

- Detailed historic description and background on the proposed landmark or proposed district.
  - Current photographs of the overall property or area, along with any historical photographs, if available.
  - Any other information which the HPO or Commission may deem necessary.

Upon receipt of a completed designation application, the HPO shall schedule a hearing at the next available regularly scheduled Commission meeting. Notice of the application shall be mailed to the property owner(s) and advertised in the official newspaper and/or posted on the property as provided for a zoning change.

A proposed historic landmark or district for which an application for designation has been received shall be protected by and subject to all of the provisions of this ordinance governing demolition, minimum maintenance standards, and penalties until a final decision by the City Council becomes effective, but not to exceed 180 days.

At the hearing, the applicant shall have an opportunity to present testimony and evidence to demonstrate the historical significance or insignificance of the subject property or district. Other interested parties and technical experts may also present testimony or documentary evidence, which will become part of a record. The burden of proof shall be upon the applicant.

The Commission may take action to approve, postpone requesting additional information, or deny the application. The HPO shall forward any final recommendation to the Planning and Zoning Commission within thirty (30) days of the hearing. Denials may be appealed directly to City Council.

The Planning and Zoning Commission shall give notice and conduct its hearing upon receipt of the recommendation from the Commission. Notice for such hearing shall be in the same manner and the hearing held according to the same procedures as specifically provided in the general zoning ordinance of the City. The Planning and Zoning Commission shall review the application to ensure that the recommended designation will not pose a conflict with the underlying land use zoning and shall forward its recommendation to the City Council within thirty (30) days after taking action on the application.

Upon receipt of the joint recommendation on the application from the Commission and the Planning and Zoning Commission, the City Council shall schedule a hearing on the application within thirty (30) days. Notice for such hearing shall be in the same manner and the hearing held according to the same procedures as specifically provided in the general zoning ordinance of the City. Significance shall be considered only on the record made before the Commission and the Planning and Zoning Commission.

Upon designation of a historic landmark or historic district by the City Council, the designation shall be recorded by legal description on the City's official zoning maps, in the records of real property of Bell County, and with the tax appraisal office.

The applicant or any persons adversely affected by any determination of the Commission may appeal the decision to City Council. Appeal requests shall be on forms as prescribed by the City and shall be filed with the HPO within seven (7) days of the Commission's decision and scheduled for the next available regularly scheduled City Council meeting. Notice for such

hearing shall be in the same manner and the hearing held according to the same procedures as specifically provided in the general zoning ordinance of the City. Appeals to the City Council shall be considered only on the record made before the Commission, and may only allege that the Commission's decision was arbitrary, capricious, or illegal.

## **29.9. ORDINARY MAINTENANCE**

Nothing in this ordinance shall be construed to prevent the ordinary maintenance and repair of any exterior architectural feature of an historic landmark or a property within an historic district which does not involve a change in design, material, or outward appearance that require the issuance of a building permit. In-kind repair/replacement and repainting is included in this definition of ordinary maintenance unless painting involves an exterior masonry surface that was not previously painted. The HPO shall determine what is "ordinary maintenance."

## **29.10. MINIMUM MAINTENANCE STANDARDS**

No owner or person with an interest in real property designated as an historic landmark or a property located within an historic district shall permit the property to fall into a serious state of disrepair so as to result in the significant deterioration of any exterior architectural feature which would, in the judgment of the Commission, create a detrimental effect upon the historic character of the landmark or district.

Examples of serious disrepair or significant deterioration include:

- (a) Deterioration of exterior walls, foundations, or other vertical support that causes leaning, sagging, splitting, listing, or buckling.
- (b) Deterioration of external chimneys that causes leaning, sagging, splitting, listing, or buckling.
- (c) Deterioration or crumbling of exterior plaster finishes, surfaces or mortars.
- (d) Ineffective waterproofing of exterior walls, roofs, and foundations, including broken windows or doors.
- (e) Defective protection or lack of weather protection for exterior wall and roof coverings, including lack of paint, or weathering due to lack of paint or other protective covering.
- (f) Rotting, holes, and other forms of material decay.
- (g) Deterioration of exterior stairs, porches, handrails, window and door frames, cornices, entablatures, wall facings, and architectural details that causes delamination, instability, loss of shape and form, or crumbling.
- (h) Deterioration that has a detrimental effect upon the special character of the district as a whole or the unique attributes and character of the contributing structure.
- (i) Deterioration of any exterior feature so as to create or permit the creation of any hazardous or unsafe conditions to life, health, or other property.

## **29.11. DEMOLITION BY NEGLECT**

Demolition by Neglect refers to the gradual deterioration of a property when routine or minimum maintenance is not performed. The HPO and the planning department staff shall work together in an effort to reduce Demolition by Neglect involving properties with historic overlay zoning. A Demolition by Neglect citation as determined by the Commission may be issued against the owner of the property for failure to comply with the minimum maintenance standards by permitting the subject property to exhibit serious disrepair or significant deterioration as outlined in Section 29.10 herein.

- 1) While the HPO will act as the point of contact, the planning department staff shall, when needed, assist with inspections. If there is a dispute between the HPO and planning department staff, the City Manager shall make the final determination.
- 2) The procedure for citing a property owner for Demolition by Neglect shall be as follows:
  - (a) Initial identification is made by visual inspection of the area by the HPO or a Commission member or by referral from someone in the area. All referrals shall be made in writing and shall be submitted to the HPO.
    - (i) Once the initial identification is made, followed by a preliminary determination by the HPO, the property owner shall be notified by U.S. mail of the defects of the building and informed of any incentive programs that may be available for repair. The owner shall be given thirty (30) days in which to respond to the preliminary determination by submitting a stabilization proposal to the HPO. The stabilization proposal will be presented to the Commission at the next available meeting. If the Commission approves the proposal, a certificate of appropriateness (if necessary) may be issued administratively by the HPO. The approval will detail the specific work that is necessary to correct the Demolition by Neglect conditions, as well as a time period to begin and complete the work. The HPO shall update the Commission on the status of the property every thirty (30) days, once work begins on the property.
    - (ii) If the property owner receives the letter regarding the preliminary determination, but fails to respond, a second notice shall be sent in the same manner as described above.
    - (iii) If the property owner fails to receive and/or respond to the letter regarding the preliminary determination after two (2) attempts, the matter returns to the Commission for a citation hearing. The HPO shall send a third notice via certified mail informing the owner of the hearing, the property shall be posted with a notice of the violation in accordance with the provisions of this Ordinance, and a public hearing on the citation shall be scheduled.
    - (iv) At the public hearing, the owner will be invited to address the Commission's concerns and to show cause why a citation should not be issued. The Commission may take action to approve any proposed work, defer the matter to give the owner more time either to correct the deficiencies or make a proposal for stabilization, or issue a citation to the owner of the property for failure to correct the Demolition by Neglect conditions.
    - (v) If the owner is cited for the condition of Demolition by Neglect of the property, he shall be given fourteen (14) days to submit a stabilization proposal to the HPO, and at the discretion of the Commission, up to one (1) year to correct the defects. The HPO

shall update the Commission on the status of the property every thirty (30) days once work begins on the property.

(vi) If the owner does not respond with a stabilization proposal, the matter shall be turned over to the City Attorney's office for recommendation to the City Council for legal action.

- (3) The City may create programs, or enter into partnerships with local non-profit organizations, to assist low-income and/or elderly homeowners with maintenance.

#### **29.12. CERTIFICATES OF APPROPRIATENESS**

- (a) *Applicability.* A certificate of appropriateness shall be required in the following circumstances before the commencement of development within or work upon any property with historic overlay zoning:

- (1) Whenever such work or development requires a building permit or certificate of zoning compliance issued by the City;
- (2) Whenever such work includes the erection, moving, demolition, reconstruction, restoration, or alteration of the exterior of a property with historic overlay zoning, except when such work satisfies all the requirements of ordinary maintenance and repair as defined in Section 29.3, definitions.

- (b) *Certificate of appropriateness required.* No building permit shall be issued by the building official for any property with historic overlay zoning until the application for such permit has been reviewed and a certificate of appropriateness has been approved by the HPO or the Commission.

- (c) *Procedures.*

- (1) After an application for a certificate of appropriateness is submitted, the HPO shall determine whether the application shall be eligible for administrative review or the application shall be considered by the Commission.

- (2) An application shall be eligible for administrative review by the HPO for the following:

- a. Paint colors for the exterior of a structure including siding, trim, doors, steps, porches, railings, and window frames. This shall not include painting or otherwise coating previously unpainted masonry;
- b. The placement and screening, if necessary, of roof-mounted equipment and other mechanical equipment of various types;
- c. The placement and design of screening treatments for trash and recycling receptacles;
- d. Fences to be installed in the rear and/or side yard;
- e. Ground lighting;

- f. Elements attached to a facade of any building, garage or carriage house including, but not limited to door hardware, hinges, mailboxes, light fixtures, sign brackets, street address signage and historic interpretive signage.
  - g. Replacing roofing materials or color on a flat roof that will not be visible from the ground or from immediately adjacent taller buildings;
  - h. Gutters and downspouts;
  - i. Installation or removal of landscaping, including trees;
  - j. Accessibility ramps;
  - k. Changes to awning fabric color for an existing awning;
  - l. Landscape elements, including but not limited to walks, paving, benches, outdoor furniture, planters, pools, trellises, arbors and gazebos;
  - m. Installation of any elements required by other codes such as emergency lighting;
  - n. Modifications that are considered non-permanent such as, but not limited to, window films and temporary features to weatherize or stabilize a historic resource;
  - o. Minor modifications to an existing certificate of appropriateness that still meets the intent of the original approval;
  - p. Renewal of an expired certificate of appropriateness.
- (3) If an application for administrative review is approved or approved with conditions, the HPO shall issue a certificate of appropriateness pursuant to section (d) below.
  - (4) If the HPO: forwards the application to the Commission because it does not meet the criteria in subsection (2) above, does not act on the application within ten (10) business days of receipt of the complete application, disapproves the application, or the applicant wishes to appeal the administrative decision or associated conditions of the certificate of appropriateness application, the Commission shall consider the application. An appeal to an administrative decision shall be filed with the Commission within ten (10) business days of said decision.
  - (5) If an application is to be considered by the Commission, the HPO shall inform the applicant of the meeting date at which the application shall be considered. The applicant shall have the right to be heard and may be accompanied or represented by counsel and/or one or more construction or design professionals at the meeting.
  - (6) The HPO shall review the application and make a recommendation to the Commission during the meeting at which the application shall be considered.

(7) After hearing the applicant and any other interested parties, and considering the recommendation from the HPO, the Commission shall take one of the following actions:

- a. Approve the proposed work or development and issue a certificate of appropriateness.
- b. Approve the proposed work or development with conditions and issue a conditional certificate of appropriateness.
- c. Disapprove the certificate of appropriateness.

(8) In the case of the disapproval of a certificate of appropriateness by the Commission, the Commission shall state in writing the reasons for such disapproval and may include suggestions in regard to actions the applicant might take to secure the approval of the Commission concerning future issuance of a certificate of appropriateness.

(d) *Certificate.*

(1) It shall be the responsibility of the HPO to issue the actual certificate of appropriateness following administrative approval or approval by the Commission with any designated conditions, and to maintain a copy of the certificate of appropriateness, together with the proposed plans. These shall be public documents for all purposes.

(2) Work performed pursuant to the issuance of a certificate of appropriateness shall conform to the requirements of such certificate. It shall be the duty of the building official to inspect from time to time any work performed pursuant to a certificate of appropriateness to assure such compliance. In the event that such work is not in compliance, the building official shall issue a stop work order and/or citation as prescribed by ordinance. The Commission may request that the building official inspect the work and issue a stop work order.

(e) *Criteria.* The HPO or the Commission shall determine whether to grant a certificate of appropriateness based on the following criteria:

- (1) The effect of the proposed change upon the general historic, cultural and architectural nature of the historic property or historic district;
- (2) The appropriateness of exterior architectural features, including parking and loading spaces, which can be seen from a public street, alley or walkway; and
- (3) The general design, arrangement, texture, material and color of the building or structure and the relation of such factors to similar features of buildings or structures in the historic district, contrast or other relation of such factors to other buildings or structures built at or during the same period, as well as the



uniqueness of such features, considering the remaining examples of architectural, historical and cultural values.

(f) *Guidelines.* In all of its determinations of architectural appropriateness and historical integrity in the design and construction of historic properties or signs, the HPO or the Commission shall use the most recent edition of the book entitled, "The Secretary of the Interior's Standards for the Treatment of Historic Properties: With Guidelines for Preserving, Rehabilitation, Restoring and Reconstructing Historic Buildings", attached hereto as Exhibit "A" for reference, or any future publication which replaces this book, and the following criteria as guidelines:

- (1) Every reasonable effort shall be made to provide a compatible use for a property that requires minimal alteration, or to use a property for its originally intended purpose.
- (2) The distinguishing original qualities or character of a historic property and its environment should not be destroyed. The removal or alteration of any historic material or distinctive architectural features should be avoided when possible.
- (3) All historic properties shall be recognized as products of their own time. Alterations that have no historic basis and which seek to create an earlier appearance shall be discouraged.
- (4) Changes that may have taken place in the course of time are evidence of the history and development of an historic property and its environment. These changes may have acquired significance in their own right, and this significance shall be recognized and respected.
- (5) Distinctive stylistic features or examples of skilled craftsmanship that characterize a historic property shall be treated with sensitivity.
- (6) Weakened architectural features that are found in kind are to be repaired rather than replaced, wherever possible. In the event replacement is necessary, the new material should match the material being replaced in composition, design, color, texture and other visual qualities. Repair or replacement of missing architectural features should be based on accurate duplications of features, substantiated by historic physical or pictorial evidence rather than on conjectural designs or the availability of different architectural elements from other properties.
- (7) Surface cleaning shall be undertaken with the gentlest means possible. Sandblasting and other cleaning methods that will damage the historic building material shall not be undertaken without approval from the Historic Preservation Commission.
- (8) Every reasonable effort shall be made to protect and preserve archeological resources affected by or adjacent to any project.
- (9) Contemporary design for alterations and additions shall not be discouraged when such alterations and additions do not destroy significant historic, architectural, or cultural material and when such design is compatible with the size, scale, color,

material, a character of the property, neighborhood or environment. Wherever possible, new additions or alterations shall be done in such a manner that if such additions or alterations were to be removed in the future, the essential form and integrity of the historic property would be unimpaired.

- (g) *Supplemental guidelines.* The HPO or the Commission may develop, and the City Council may approve, such supplemental guidelines as it may find necessary to implement the regulations of historic overlay zoning or the findings applicable to the designation of a particular historic property. Such guidelines may include, but are not limited to the following:

- (1) Charts or samples of acceptable materials for siding, foundations, roofs, or other parts of buildings;
- (2) Illustrations of appropriate architectural details;
- (3) Specifications of appropriate relationships to streets, sidewalks, other structures, and buildings;
- (4) Illustrations of appropriate porch treatments or entrances; or
- (5) Illustrations of appropriate signage or street furniture.

- (h) *Certificate of appropriateness for demolition.*

- (1) *Certificate required.* No historic property shall be demolished or removed unless such demolition shall be approved by the Commission and a certificate of appropriateness for such demolition shall be granted.

- (2) *Procedure.*

- a. The procedure for issuance of a certificate of appropriateness for demolition shall be the same as for the issuance of other certificates of appropriateness with the following modification.
- b. After the hearing, the Commission may approve the certificate of appropriateness, thereby authorizing the demolition, or the Commission may disapprove the certificate of appropriateness and postpone the demolition or removal for a period of one hundred and twenty (120) days. The purpose of such a postponement would be to allow the Commission and any interested parties to explore alternatives to demolition.
- c. The Commission may extend the postponement period for an additional sixty (60) days in order to enable the completion of ongoing negotiations.
- d. Notwithstanding any provision of this ordinance, the City Council reserves the right to prohibit the demolition of a landmark structure with six (6) affirmative votes.

(3) *Supplemental demolition criteria.* In determining whether to issue a certificate of appropriateness for demolition, the Commission, and, on appeal, the City Council, shall consider the following criteria, in addition to the criteria specified in this section:

- a. The uniqueness of the property as a representative type or style of architecture, historic association, or other element of the original designation criteria applicable to such structure or tract.
- b. The condition of the property from the standpoint of structural integrity and the extent of work necessary to stabilize the property.
- c. The economically viable alternatives available to the demolition applicant, including:
  1. Donation of a part of the value of the subject structure or site to a public or nonprofit agency, including the conveyance of development rights and facade easement.
  2. The possibility of sale of the property, or any part thereof, to a prospective purchaser capable of preserving such property.
  3. The potential of the property for renovation and its potential for continuing use.
  4. The potential of the property for rezoning in an effort to render such property more compatible with the physical potential of the property. The ability of the property to produce a reasonable economic return on investment for its owner; provided, however, that this factor shall not have exclusive control and effect, but shall be considered along with all other criteria contained in this section.

(i) *Certificate of appropriateness for relocation.*

(1) *Certificate Required.* No historic resource shall be relocated unless such relocation shall be approved by the Commission and a certificate of appropriateness for such relocation shall be granted. For the purposes of this subsection concerning relocation, the term "historic resource" shall be used to describe an individual building, structure, or object designated according to the procedures in Section 29.8.

(2) *Procedure.* The procedure for issuance of a certificate of appropriateness for relocation shall be the same as for the issuance of other certificates of appropriateness with the following additions.

- a. If the historic resource is a Recorded Texas Historical Landmark or listed on the National Register of Historic Places, the applicant shall be required to notify the appropriate party at the Texas Historical Commission and receive a response in writing, prior to submitting an application for the

relocation to the Historic Preservation Commission.

- b. Documentation shall be provided to the Commission at the time of application for a certificate of appropriateness that provides the following information:

1. Overview of the proposed relocation of the historic resource, including:

- (a) Reasons for relocating the historic resource; and
- (b) Reasons for selection of destination site.

2. Photographs, which document all aspects of the historic resource. Requirements for photographs shall be provided by the Commission. At a minimum, photographs provided by the applicant shall include but are not limited to:

- (a) Each elevation of the building;
- (b) Street view;
- (c) All prominent architectural features; and
- (d) Any additional accessory buildings that also have historic overlay zoning, showing how they relate to the primary structure.
- (e) Requirements for photographs shall be maintained and provided by the Commission.

3. Site plan of historic resource in current location.

4. Site plan of historic resource in new location.

- c. Public notices of the proposed relocation shall be required as follows:

1. *Signed notice.* Within five (5) business days of receipt of an application for a certificate of appropriateness for relocation, the City shall post a sign showing notice of the application on the originating location and on the proposed destination location, for the purpose of notifying the public of the proposed relocation.

2. *Mailed notice.*

- (a) Ten (10) business days prior to the Commission meeting when the application will be heard, written notices shall be mailed to each owner, as indicated by the most recently approved City tax roll, of real property within 300 feet of the

existing property with the resource proposed for relocation and 300 feet of the proposed new location. Notice may be served by its deposit in the U.S. Mail in the City, properly addressed with postage paid.

(b) Mailed notices shall contain at least the following specific information:

- (1) The general location of land that is the subject of the application and/or a location map;
- (2) The legal description or street address;
- (3) The substance of the application;
- (4) The time, date and location of the Historic Preservation Commission meeting;
- (5) A phone number to contact the City; and
- (6) A statement that interested parties may appear at the hearing.

d. When a historic resource is relocated to a new site, the historic resource shall retain the historic overlay and therefore continue to be subject to the requirements of a certificate of appropriateness.

(3) *Supplemental relocation criteria.* In determining whether to issue a certificate of appropriateness for relocation, the Commission, and, if necessary, on appeal, the City Council, shall consider the following criteria, in addition to the criteria specified in this subsection:

- a. The historic resource is imminently threatened by demolition or removal of historic overlay zoning.
- b. Reasonable alternatives have been examined to mitigate the threat to the historic resource, in lieu of relocation. Alternatives may include, but are not limited to:
  1. Modification of the proposed project affecting the historic resource to avoid its impact on the location of the historic resource.
  2. Incorporation of the historic resource, in its entirety, into the proposed project that would affect the location of the historic resource.
- c. When relocated, the historic resource shall remain in the City of Belton.

- d. The structural condition of the historic resource has been examined so that it has been determined that the historic resource may be moved and that damage to the historic resource which would result from the move can be minimized. Stabilization of the historic resource prior to and/or during the move may be required.
- e. A new location for the historic resource has been determined that would be compatible with the architectural aspects of the historic resource, to the extent possible. Consideration shall include the review of all of the following:
  - 1. Size of the resource and destination lot;
  - 2. Massing;
  - 3. Architectural style;
  - 4. Review of all adopted design guidelines by the Commission in determining compatibility; and
  - 5. Other historic resources, which are not the primary resource on the site, but are historically associated with the primary resource, also should be relocated, if possible, and may be considered for relocation with the primary resource on the same certificate of appropriateness
- f. Any historic resource relocated pursuant to this section shall be required to conform to any siting conditions at the new location. These siting conditions shall include, but are not limited to, setback requirements, structural alteration requirements such as enclosed parking requirements, and architectural requirements such as exterior finishes and orientation.
- g. The applicant agrees to the following additional conditions of the certificate of appropriateness:
  - 1. The historic resource shall be secured from vandalism and other damage for the time that it remains vacant as a result of the relocation process.
  - 2. The applicant shall be required to display a plaque, provided and paid for by the City, which documents the historic resource's original location, date of relocation, and reason for relocation.
  - 3. The historic overlay shall convey with the historic resource to its new location.
  - 4. The historic overlay shall be removed from the originating property, unless one of the following applies:

- (a) The property is located within an historic district; or
  - (b) Only an accessory structure has been moved and the primary structure on the site remains; or
  - (c) The site itself is historically significant.
- 5. The City may apply the historic overlay to the destination lot(s), by following the procedures for applying historic overlay in Section 29.8 of the code. If the historic resource is being moved into an already designated historic district, the historic overlay shall remain and apply to the destination lot or lot(s).
- 6. The applicant shall provide photographs to the HPO of the relocated historic resource once relocation is complete.
- 7. Information regarding the relocation shall be filed in the appropriate City and county records.
- (4) *Fee Waivers.* If a certificate of appropriateness for relocation has been approved by the Commission, the following fees shall be waived:
  - a. Building moving and permits fees
  - b. Notice requirement fees.

(j) *Appeals.* Appeals of certificate of appropriateness decisions made by the Commission shall be made within fifteen (15) days to the City Council.

### **29.13. ECONOMIC HARDSHIP**

No certificate of appropriateness for demolition involving a claim of economic hardship may be approved, nor shall a demolition permit be issued by the City unless the owner proves compliance with the following standards for economic hardship:

- (a) The property is incapable of earning a reasonable return in its current or rehabilitated state, regardless of whether that return represents the most profitable return possible; and
- (b) The property cannot be adapted for any other use, whether by the current owner or by a purchaser, which would result in a reasonable return; and
- (c) Earnest and reasonable efforts to find a purchaser interested in acquiring the property and preserving it have failed; and
- (d) The property cannot be moved or relocated to another site similar site or within the District.

1) The City shall adopt by resolution separate criteria for review in considering claims of economic hardship for investment for income-producing and non-income-producing properties, as recommended by the Commission. Non-income properties shall consist of owner-occupied single-family dwellings and non-income-producing institutional properties. All standards for review shall be made available to the owner prior to the hearing. The information to be considered by the City may include, but not be limited to, the following:

- (a) Purchase date price and financing arrangements
- (b) Current market value
- (c) Form of ownership
- (d) Type of occupancy
- (e) Cost estimates of demolition and post demolition plans for development
- (f) Maintenance and operating costs
- (g) Inspection report by licensed architect or structural engineer having experience working with historic properties
- (h) Costs and engineering feasibility for rehabilitation
- (i) Property tax information
- (j) Rental rates and gross income from the property
- (k) Other additional information as deemed appropriate

2) Claims of economic hardship by the owner shall not be based on conditions resulting from:

- (a) Evidence of demolition by neglect or other willful and negligent acts by the owner
- (b) Purchasing the property for substantially more than market value at the time of purchase
- (c) Failure to perform normal maintenance and repairs
- (d) Failure to diligently solicit and retain tenants
- (e) Failure to provide normal tenant improvements

3) Throughout the process, the applicant shall consult in good faith with the HPO, local preservation groups, and interested parties in a diligent effort to seek an alternative that will result in preservation of the property. Such efforts must be demonstrated to the Commission at the hearing.



#### 29.14. ENFORCEMENT

All work performed pursuant to a certificate of appropriateness issued under this ordinance shall conform to any requirements included therein. It shall be the duty of the building inspector to inspect periodically any such work to assure compliance. In the event that work is not being performed in accordance with the certificate of appropriateness, or upon notification of such fact by the Commission and verification by the HPO, the building inspector shall issue a stop work order and all work shall immediately cease. The property owner shall then be required to apply for a hearing before the Commission to explain the non-compliance. No further work shall be undertaken on the project as long as a stop work order is in effect until a decision is rendered by the Commission on the application.

#### 29.15. PENALTIES


It shall be unlawful to construct reconstruct, significantly alter, restore, or demolish any building or structure designated with historic overlay zoning in violation of the provisions of this ordinance. The city, in addition to other remedies, may institute any appropriate action or proceeding to prevent such unlawful construction, reconstruction, significant alteration, or demolition to restrain, correct, or abate such violation or to prevent any illegal act, business, or maintenance in and about such premises, including acquisition of the property

Any person, firm, or corporation violating any provision of this ordinance shall be guilty of a Class C misdemeanor, punishable by a fine of not less than two hundred and fifty dollars (\$250.00) or more than two thousand dollars (\$2,000.00). Each day the violation continues shall be considered a separate offence. Such remedy under this section is in addition to any abatement restitution.

**SECTION III: SEVERABILITY CLAUSE.** Should any paragraph, phrase, sentence, or clause of this ordinance be determined to be unconstitutional, said determination shall not affect the remaining paragraphs, phrases, sentences, or clauses, which shall remain in full force and effect.

**SECTION IV: EFFECTIVE DATE.** This ordinance shall become effective after passage and publication as required by law.


**PASSED AND APPROVED** at a regular meeting of the City Council of the City of Belton, Texas, this 26th day of June, 2012, at which meeting a quorum was present, held in accordance with the provisions of V.T.C.A., Government Code, §551.001 *et seq.*


  
Marion Grayson, MAYOR PRO TEM

ATTEST:

  
Connie Torres, CITY CLERK

APPROVED AS TO FORM:

  
John Messer, CITY ATTORNEY

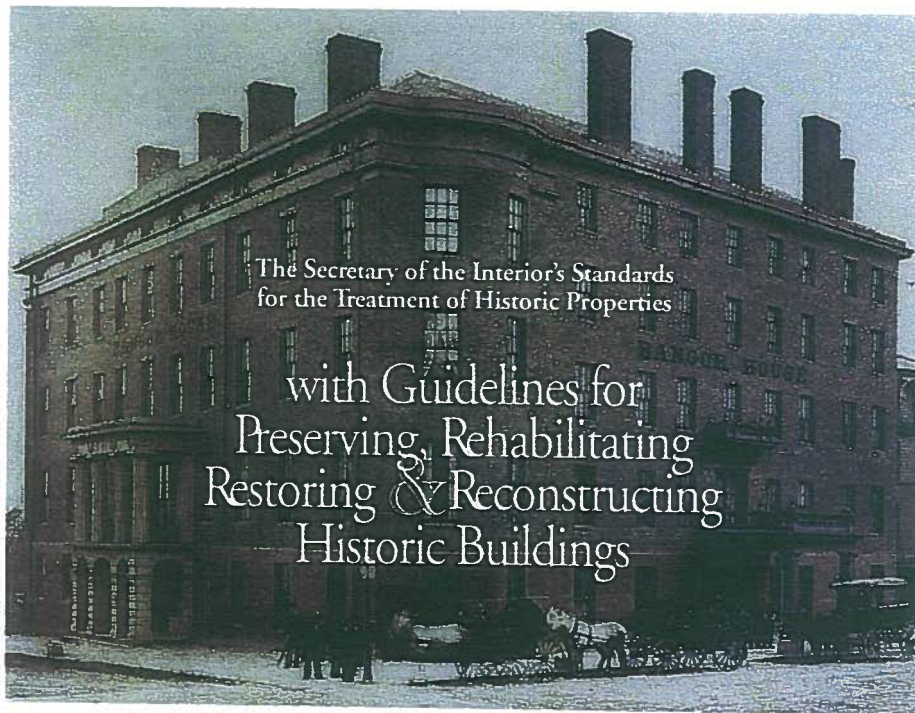

The Secretary of the Interior is responsible for establishing professional standards and providing advice on the preservation and protection of all cultural resources listed in or eligible for listing in the National Register of Historic Places. The Secretary of the Interior's Standards for the Treatment of Historic Properties, apply to all proposed development grant-in-aid projects assisted through the National Historic Preservation Fund, and are intended to be applied to a wide variety of resource types, including buildings, sites, structures, objects, and districts. They address four treatments: Preservation, Rehabilitation, Restoration, and Reconstruction. The treatment Standards, developed in 1992, were codified as 36 CFR Part 68 in the July 12, 1995 *Federal Register* (Vol. 60, No. 133). They replace the 1978 and 1983 versions of 36 CFR 68 entitled, "The Secretary of the Interior's Standards for Historic Preservation Projects." The Guidelines in this book also replace the Guidelines that were published in 1979 to accompany the earlier Standards.

Please note that The Secretary of the Interior's Standards for the Treatment of Historic Properties are only regulatory for projects receiving federal grant-in-aid funds; otherwise, the Standards and Guidelines are intended only as general guidance for work on any historic building.

Finally, another regulation, 36 CFR Part 67, focuses on "certified historic structures" as defined by the IRS Code of 1986. The "Standards for Rehabilitation" cited in 36 CFR 67 should always be used when property owners are seeking certification for Federal tax benefits.

#### Library of Congress Cataloging-in-Publication Data

Weeks, Kay D.

The Secretary of the Interior's standards for the treatment of historic properties: with guidelines for preserving, rehabilitating, restoring & reconstructing historic buildings / Kay D. Weeks and Anne E. Grimmer.

p. cm.

ISBN 0-16-048061-2

1. Architecture--United States--Conservation and restoration--Standards. 2. Historic buildings--United States--Conservation and restoration--Standards. I. Grimmer, Anne E. II. United States. National Park Service. Preservation Assistance Division. III. Title.

NA106.W44 1995  
720'.28'0021873--dc20

95-23913  
CIP  
Rev.

EXHIBIT "A"

The Secretary of the Interior's Standards  
for the Treatment of Historic Properties

# with Guidelines for Preserving, Rehabilitating, Restoring & Reconstructing Historic Buildings

Kay D. Weeks and Anne E. Grimmer

U.S. Department of the Interior  
National Park Service  
Cultural Resource Stewardship and Partnerships  
Heritage Preservation Services  
Washington, D.C.  
1995

## Contents

Acknowledgements.....	v
Introduction.....	1
Choosing an Appropriate Treatment for the Historic Building.....	1
Using the Standards and Guidelines for a Preservation, Rehabilitation, Restoration, or Reconstruction Project.....	2
Historical Overview: Building Materials • Building Features • Site • Setting • Special Requirements.....	3
Standards for Preservation and Guidelines for Preserving Historic Buildings.....	17
Introduction.....	19
Building Exterior: Materials.....	22
Masonry.....	22
Wood.....	26
Architectural Metals.....	29
Building Exterior: Features.....	33
Roofs.....	33
Windows.....	35
Entrances and Porches.....	38
Storefronts.....	40
Building Interior.....	42
Structural Systems.....	42
Spaces, Features, and Finishes.....	44
Mechanical Systems.....	49
Building Site.....	51
Setting (District/Neighborhood).....	54
Special Requirements.....	56
Energy Efficiency.....	56
Accessibility Considerations.....	58
Health and Safety Considerations.....	59

Standards for Rehabilitation and Guidelines for Rehabilitating Historic Buildings .....	61
Introduction .....	63
<b>Building Exterior: Materials</b> .....	67
Masonry .....	67
Wood .....	71
Architectural Metals .....	75
<b>Building Exterior: Features</b> .....	78
Roofs .....	78
Windows .....	81
Entrances and Porches .....	85
Storefronts .....	88
<b>Building Interior</b> .....	91
Structural Systems .....	91
Spaces, Features, and Finishes .....	94
Mechanical Systems .....	100
<b>Building Site</b> .....	102
<b>Setting (District/Neighborhood)</b> .....	106
Special Requirements .....	110
Energy Efficiency .....	110
New Additions to Historic Buildings .....	112
Accessibility Considerations .....	114
Health and Safety Considerations .....	115
<b>Standards for Restoration and Guidelines for Restoring Historic Buildings</b> .....	117
Introduction .....	119
<b>Building Exterior: Materials</b> .....	122
Masonry .....	122
Wood .....	127
Architectural Metals .....	131

<b>Building Exterior: Features</b> .....	135
Roofs .....	135
Windows .....	137
Entrances and Porches .....	140
Storefronts .....	143
<b>Building Interior</b> .....	145
Structural Systems .....	145
Spaces, Features, and Finishes .....	147
Mechanical Systems .....	151
<b>Building Site</b> .....	153
<b>Setting (District/Neighborhood)</b> .....	157
Special Requirements .....	160
Energy Efficiency .....	160
Accessibility Considerations .....	162
Health and Safety Considerations .....	163
<b>Standards for Reconstruction and Guidelines for Reconstructing Historic Buildings</b> .....	165
Introduction .....	167
Research and Documentation .....	170
<b>Building Exterior</b> .....	172
<b>Building Interior</b> .....	172
<b>Building Site</b> .....	174
<b>Setting (District/Neighborhood)</b> .....	175
Special Requirements .....	177
Energy Efficiency .....	177
Accessibility Considerations .....	177
Health and Safety Considerations .....	177
<b>Technical Guidance Publications</b> .....	179

## Photo Credits

### *Front and Back Covers*

*Bangor House, Bangor, Maine*, circa 1880. Historic photo (front) and drawing (back): Courtesy, Maine State Historic Preservation Office.

### *Historical Overview (Materials and Features)*

*Building Exterior: Masonry*. Jack E. Boucher, HABS.

*Building Exterior: Wood*. Jack E. Boucher, HABS.

*Building Exterior: Architectural Metals*. Cervin Robinson, HABS.

*Building Exterior: Roofs*. Jack E. Boucher, HABS.

*Building Exterior: Windows*. Jack E. Boucher, HABS.

*Building Exterior: Entrances and Porches*. Jack E. Boucher, HABS.

*Building Exterior: Storefronts*. Jack E. Boucher, HABS.

*Building Interior: Structural Systems*. Cervin Robinson, HABS.

*Building Interior: Spaces, Features and Finishes*. Brooks Photographers, HABS Collection.

*Building Interior: Mechanical Systems*. National Park Service Files.

*Building Site*. Jack E. Boucher, HABS.

*Setting (District/Neighborhood)*. Charles Ashton.

*Energy Conservation*. Laura A. Muckenfuss.

*New Additions to Historic Buildings*. Rodney Gary.

*Accessibility Considerations*. Department of Cultural Resources, Raleigh, North Carolina.

*Health and Safety Considerations*. National Park Service Files.

## Chapter Heads

### *Preservation*

*Hale House, Los Angeles, California*. Photos: Before: National Park Service files; After: Bruce Bochner.

### *Rehabilitation*

*Storefront, Painted Post, New York, after rehabilitation*. Photo: Kellogg Studio.

### *Restoration*

*Cameron-Stanford House, Oakland, California*. Photos: Before: National Park Service files; After: Courtesy, James B. Spaulding.

### *Reconstruction*

*George Washington Memorial House at Washington Birthplace National Monument, Watmoreland County, Virginia*. Photo: Richard Freat.

### *Text*

It should be noted that those photographs used to illustrate the guidelines text that are not individually credited in the captions are from National Park Service files.

## Acknowledgements

*The Standards for the Treatment of Historic Properties*, published in 1992, were reviewed by a broad cross-section of government entities and private sector organizations. *The Guidelines for Preserving, Rehabilitating, Restoring and Reconstructing Historic Buildings* were developed in cooperation with the National Conference of State Historic Preservation Officers and reviewed by individual State Historic Preservation Offices nationwide. We wish to thank Stan Graves and Claire Adams, in particular, for their thoughtful evaluation of the new material. Dahlia Hernandez provided administrative support throughout the project.

Finally, this book is dedicated to H. Ward Jandl, whose long-term commitment to historic preservation helped define the profession as we know it today.

The Secretary of the Interior's Standards for the Treatment of Historic Properties may be applied to one historic resource type or a variety of historic resource types; for example, a project may include a complex of buildings such as a house, garage, and barn; the site, with a designed landscape, natural features, and archeological components; structures such as a system of roadways and paths or a bridge; and objects such as fountains and statuary.

#### Historic Resource Types & Examples

**Building:** houses, barns, stables, sheds, garages, court-houses, city halls, social halls, commercial buildings, libraries, factories, mills, train depots, hotels, theaters, stationary mobile homes, schools, stores, and churches.

**Site:** habitation sites, funerary sites, rock shelters, village sites, hunting and fishing sites, ceremonial sites, petroglyphs, rock carvings, ruins, gardens, grounds, battlefields, campsites, sites of treaty signings, trails, areas of land, shipwrecks, cemeteries, designed landscapes, and natural features, such as springs and rock formations, and land areas having cultural significance.



Zane-Like Historic District, Ohio. Aerial view. Photo: National Park Service.



Elmdorf, Lexington, Kentucky. Photo: Charles A. Birnbaum.

**Structure:** bridges, runnels, gold dredges, firetowers, canals, turbines, dams, power plants, corn-cribs, silos, roadways, shot towers, windmills, grain elevators, kilns, mounds, cairns, palisade fortifications, earthworks, railroad grades, systems of roadways and paths, boats and ships, railroad locomotives and cars, telescopes, carousels, bandstands, gazebos, and aircraft.

**Object:** sculpture, monuments, boundary markers, statuary, and fountains.

**District:** college campuses, central business districts, residential areas, commercial areas, large forts, industrial complexes, civic centers, rural villages, canal systems, collections of habitation and limited activity sites, irrigation systems, large farms, ranches, estates, or plantations, transportation networks, and large landscaped parks.

(Sidebar adapted from *National Register Property and Resource Types*, p. 15. *National Register Bulletin 15A, How to Complete the National Register Form*, published by the National Register Branch, Intergovernmental Resources Division, National Park Service, U.S. Department of the Interior, 1991.)

## Introduction

### Choosing an Appropriate Treatment for the Historic Building

The Standards are neither technical nor prescriptive, but are intended to promote responsible preservation practices that help protect our Nation's irreplaceable cultural resources. For example, they cannot, in and of themselves, be used to make essential decisions about which features of the historic building should be saved and which can be changed. But once a treatment is selected, the Standards provide philosophical consistency to the work.

Choosing the most appropriate treatment for a building requires careful decision-making about a building's historical significance, as well as taking into account a number of other considerations:

**Relative importance in history.** Is the building a nationally significant resource—a rare survivor or the work of a master architect or craftsman? Did an important event take place in it? National Historic Landmarks, designated for their "exceptional significance in American history," or many buildings individually listed in the National Register often warrant Preservation or Restoration. Buildings that contribute to the significance of a historic district but are not individually listed in the National Register more frequently undergo Rehabilitation for a companionable new use.

**Physical condition.** What is the existing condition—or degree of material integrity—of the building prior to work? Has the original form survived largely intact or has it been altered over time? Are the alterations an important part of the building's history?

Preservation may be appropriate if distinctive materials, features, and spaces are essentially intact and convey the building's historical significance. If the building requires more extensive repair and replacement, or if alterations or additions are necessary for a new use, then Rehabilitation is probably the most appropriate treatment. These key questions play major roles in determining what treatment is selected.

**Proposed use.** An essential, practical question to ask is: Will the building be used as it was historically or will it be given a new use? Many historic buildings can be adapted for new uses without seriously damaging their historic character; special-use properties such as grain silos, forts, ice houses, or windmills may be extremely difficult to adapt to new uses without major intervention and a resulting loss of historic character and even integrity.

**Mandated code requirements.** Regardless of the treatment, code requirements will need to be taken into consideration. But if hastily or poorly designed, a series of code-required actions may jeopardize a building's materials as well as its historic character. Thus, if a building needs to be seismically upgraded, modifications to the historic appearance should be minimal. Abatement of lead paint and asbestos within historic buildings requires particular care if important historic finishes are not to be adversely affected. Finally, alterations and new construction needed to meet accessibility requirements under the Americans with Disabilities Act of 1990 should be designed to minimize material loss and visual change to a historic building.

### Using the Standards and Guidelines for a Preservation, Rehabilitation, Restoration, or Reconstruction Project

*The Secretary of the Interior's Standards for the Treatment of Historic Properties with Guidelines for Preserving, Rehabilitating, Restoring and Reconstructing Historic Buildings* are intended to provide guidance to historic building owners and building managers, preservation consultants, architects, contractors, and project reviewers prior to treatment.

As noted, while the treatment Standards are designed to be applied to all historic resource types included in the National Register of Historic Places—buildings, sites, structures, districts, and objects—the Guidelines apply to *specific* resource types; in this case, buildings.

The Guidelines have been prepared to assist in applying the Standards to all project work; consequently, they are not meant to give case-specific advice or address exceptions or rare instances. Therefore, it is recommended that the advice of qualified historic preservation professionals be obtained early in the planning stage of the project. Such professionals may include architects, architectural historians, historians, historical engineers, archeologists, and others who have experience in working with historic buildings.

The Guidelines pertain to both exterior and interior work on historic buildings of all sizes, materials, and types. Those approaches to work treatments and techniques that are consistent with *The Secretary of the Interior's Standards for the Treatment of Historic Properties* are listed in the "Recommended" column on the left; those which are inconsistent with the Standards are listed in the "Not Recommended" column on the right.

One chapter of this book is devoted to each of the four treatments: Preservation, Rehabilitation, Restoration, and Reconstruction. Each chapter contains one set of Standards and accompanying Guidelines that are to be used throughout the course of a project. The Standards for the first treatment, *Preservation*, require retention of the greatest amount of historic fabric, along with the building's historic form, features, and detailing as they have evolved over time. The *Rehabilitation* Standards acknowledge the need to alter or add to a historic building to meet continuing or new uses while retaining the building's historic character. The *Restoration* Standards allow for the depiction of a building at a particular time in its history by preserving materials from the period of significance and removing materials from other periods. The *Reconstruction* Standards establish a limited framework for re-creating a vanished or non-surviving building with new materials, primarily for interpretive purposes.

The Guidelines are preceded by a brief historical overview of the primary historic building materials (masonry, wood, and architectural metals) and their diverse uses over time. Next, building features comprised of these materials are discussed, beginning with the exterior, then moving to the interior. Special requirements or work that must be done to meet accessibility requirements, health and safety code requirements, or retrofitting to improve energy efficiency are also addressed here. Although usually not part of the overall process of protecting historic buildings, this work must also be assessed for its potential impact on a historic building.


### Historical Overview Building Exterior Materials

#### Masonry

*Stone* is one of the more lasting of masonry building materials and has been used throughout the history of American building construction. The kinds of stone most commonly encountered on historic buildings in the U.S. include various types of sandstone, limestone, marble, granite, slate and fieldstone. *Brick* varied considerably in size and quality. Before 1870, brick clays were pressed into molds and were often unevenly fired. The quality of brick depended on the type of clay available and the brick-making techniques; by the 1870s—with the perfection of an extrusion process—bricks became more uniform and durable. *Terra cotta* is also a kiln-dried clay product popular from the late 19th century until the 1930s. The development of the steel-frame office buildings in the early 20th century contributed to the widespread use of architectural terra cotta. *Adobe*, which consists of sun-dried earthen bricks, was one of the earliest building materials used in the U.S., primarily in the Southwest where it is still popular.

*Mortar* is used to bond together masonry units. Historic mortar was generally quite soft, consisting primarily of lime and sand with other additives. By the latter part of the 19th century, portland cement was usually added resulting in a more rigid and non-absorbing mortar. Like historic mortar, early *stucco* coatings were also heavily lime-based, increasing in hardness with the addition of portland cement in the late 19th century. *Concrete* has a long history, being variously made of rubble, volcanic ash and, later, of natural hydraulic cements, before the introduction of portland cement in the 1870s. Since then, concrete has also been used in its precast form.

While masonry is among the most durable of historic building materials, it is also very susceptible to damage by improper maintenance or repair techniques and harsh or abrasive cleaning methods.

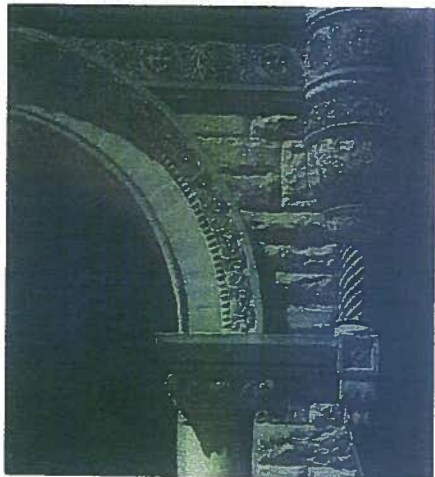




### Wood

Wood has played a central role in American building during every period and in every style. Whether as structural members, exterior cladding, roofing, interior finishes, or decorative features, wood is frequently an essential component of historic buildings.


Because it can be easily shaped by sawing, sanding, planing, carving, and gouging, wood is used for architectural features such as clapboard, cornices, brackets, encablatures, shutters, columns and balustrades. These wooden features, both functional and decorative, are often important in defining the historic character of the building.

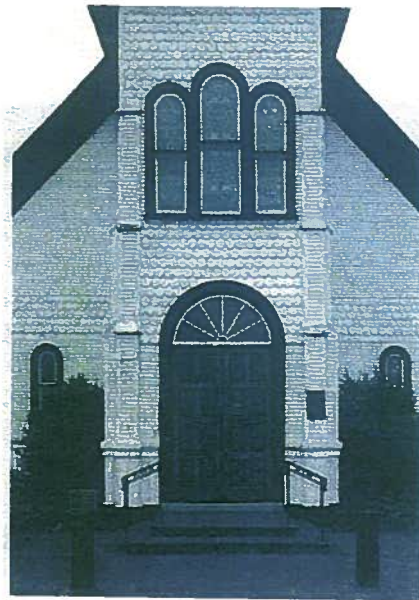

### Architectural Metals

Architectural metal features—such as cast iron facades, porches, and steps; sheer metal cornices, siding, roofs, roof cresting and storefronts; and cast or rolled metal doors, window sash, encablatures, and hardware—are often highly decorative and may be important in defining the overall character of historic American buildings.

Metals commonly used in historic buildings include lead, tin, zinc, copper, bronze, brass, iron, steel, and to a lesser extent, nickel alloys, stainless steel and aluminum. Historic metal building components were often created by highly skilled, local artisans, and by the late 19th century, many of these components were prefabricated and readily available from catalogs in standardized sizes and designs.

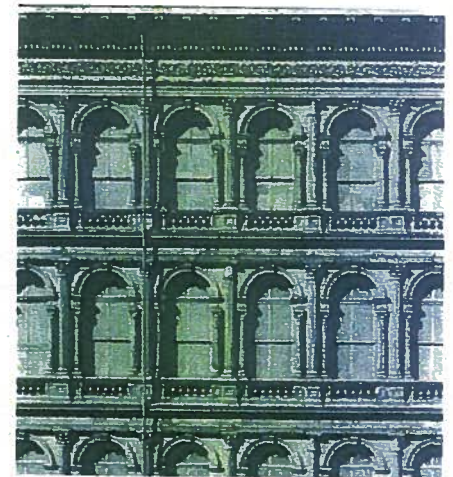



## Building Exterior Features

### Roofs

The roof—with its shape; features such as cresting, dormers, cupolas, and chimneys; and the size, color, and patterning of the roofing material—is an important design element of many historic buildings. In addition, a weathertight roof is essential to the long-term preservation of the entire structure. Historic roofing reflects availability of materials, levels of construction technology, weather, and cost. Throughout the country in all periods of history, *wood shingles* have been used—their size, shape, and detailing differing according to regional craft practices.

European settlers used *clay tile* for roofing at least as early as the mid-17th century. In some cities, such as New York and Boston, clay tiles were popularly used as a precaution against fire. The Spanish influence in the use of clay tiles is found in the southern, southwestern and western states. In the mid-19th century, tile roofs were often replaced by *sheet-metal*, which is lighter and easier to maintain.

Evidence of the use of *slate* for roofing dates from the mid-17th century. Slate has remained popular for its durability, fireproof qualities, and its decorative applications. The use of metals for roofing and roof features dates from the 18th century, and includes the use of *sheet metal*, *corrugated metal*, *galvanized metal*, *tin-plate*, *copper*, *lead* and *zinc*.

New roofing materials developed in the early 20th century include built-up roll roofing, and concrete, asbestos, and asphalt shingles.




### Windows

Technology and prevailing architectural styles have shaped the history of windows in the United States starting in the 17th century with wooden casement windows with tiny glass panes sealed in lead cames. From the transitional single-hung sash in the early 1700s to the true double-hung sash later in the century, these early wooden windows were characterized by small panes, wide muntins, and decorative trim. As the sash thickness increased, muntins took on a thinner appearance as they narrowed in width but increased in thickness.

Changes in technology led to larger panes of glass so that by the mid-19th century, two-over-two lights were common; the manufacture of plate glass in the United States allowed for use of large sheets of glass in commercial and office buildings by the late 19th century. With mass-produced windows, mail order distribution, and changing architectural styles, it was possible to obtain a wide range of window designs and light patterns in sash. Early 20th century designs frequently utilized smaller lights in the upper sash and also casement windows. The desire for fireproof building construction in dense urban areas contributed to the growth of a thriving steel window industry along with a market for hollow metal and metal clad wooden windows.

As one of the few parts of a building serving as both an interior and exterior feature, windows are nearly always an important part of a historic building.

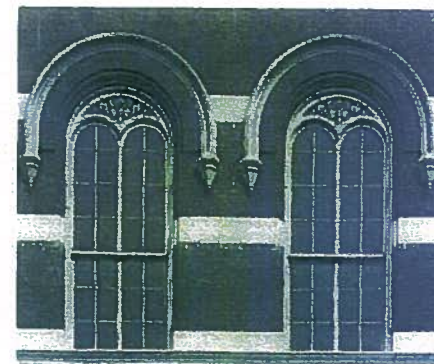

### Entrances and Porches

Entrances and porches are quite often the focus of historic buildings, particularly on primary elevations. Together with their functional and decorative features such as doors, steps, balustrades, pilasters, and entablatures, they can be extremely important in defining the overall character of a building. In many cases, porches were energy-saving devices, shading southern and western elevations. Usually entrances and porches were integral components of a historic building's design; for example, porches on Greek Revival houses, with Doric or Ionic columns and pediments, echoed the architectural elements and features of the larger building. Central one-bay porches or arcaded porches are evident in Italianate style buildings of the 1860s. Doors of Renaissance Revival style buildings frequently supported entablatures or pediments. Porches were particularly prominent features of Eastlake and Stick Style houses in which porch posts, railings, and balustrades were characterized by a massive and robust quality, with members turned on a lathe. Porches of bungalows of the early 20th century were characterized by tapered porch posts, exposed post and beams, and low pitched roofs with wide overhangs. Art Deco commercial buildings were entered through stylized glass and stainless steel doors.



### Storefronts

The earliest extant storefronts in the U.S., dating from the late 18th and early 19th centuries, had bay or oriel windows and provided limited display space. The 19th century witnessed the progressive enlargement of display windows as plate glass became available in increasingly larger units. The use of cast iron columns and lintels at ground floor level permitted structural members to be reduced in size. Recessed entrances provided shelter for sidewalk patrons and further enlarged display areas. In the 1920s and 1930s, aluminum, colored structural glass, stainless steel, glass block, neon, and other new materials were introduced to create Art Deco storefronts.

The storefront is usually the most prominent feature of a historic commercial building, playing a crucial role in a store's advertising and merchandising strategy. Although a storefront normally does not extend beyond the first story, the rest of the building is often related to it visually through a unity of form and detail. Window patterns on the upper floors, cornice elements, and other decorative features should be carefully retained, in addition to the storefront itself.




## Building Interior

### Structural Systems

The types of structural systems found in the United States include, but are not limited to the following: wooden frame construction (17th c.), balloon frame construction (19th c.), load-bearing masonry construction (18th c.), brick cavity wall construction (19th c.), heavy timber post and beam industrial construction (19th c.), fireproof iron construction (19th c.), heavy masonry and steel construction (19th c.), skeletal steel construction (19th c.), and concrete slab and post construction (20th c.).

If features of the structural system are exposed such as loadbearing brick walls, cast iron columns, roof trusses, posts and beams, vigas, or stone foundation walls, they may be important in defining the building's overall historic character. Unexposed structural features that are not character-defining or an entire structural system may nonetheless be significant in the history of building technology. The structural system should always be examined and evaluated early in the project planning stage to determine its physical condition, its ability to support any proposed changes in use, and its importance to the building's historic character or historical significance.

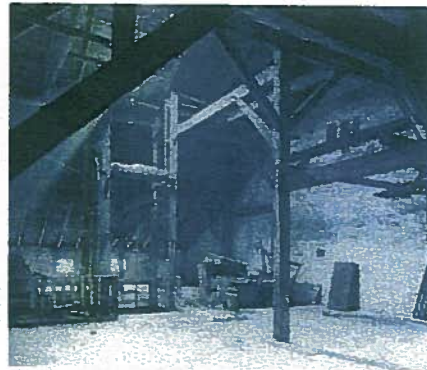

### Spaces, Features, and Finishes

An interior floor plan, the arrangement and sequence of spaces, and built-in features and applied finishes are individually and collectively important in defining the historic character of the building. Interiors are comprised of a series of primary and secondary spaces. This is applicable to all buildings, from courthouses to cathedrals, to cottages and office buildings. Primary spaces, including entrance halls, parlors, or living rooms, assembly rooms and lobbies, are defined not only by their function, but also by their features, finishes, size and proportion.

Secondary spaces are often more functional than decorative, and may include kitchens, bathrooms, mail rooms, utility spaces, secondary hallways, firetrains and office cubicles in a commercial or office space. Extensive changes can often be made in these less important areas without having a detrimental effect on the overall historic character.




### Mechanical Systems

Mechanical, lighting and plumbing systems improved significantly with the coming of the Industrial Revolution. The 19th century interest in hygiene, personal comfort, and the reduction of the spread of disease were met with the development of central heating, piped water, piped gas, and network of underground cast iron sewers. Vitreous tiles in kitchens, baths and hospitals could be cleaned easily and regularly. The mass production of cast iron radiators made central heating affordable to many; some radiators were elaborate and included special warming chambers for plates or linens. Ornamental grilles and registers provided decorative covers for functional heaters in public spaces. By the turn of the 20th century, it was common to have all these modern amenities as an integral part of the building.

The greatest impacts of the 20th century on mechanical systems were the use of electricity for interior lighting, forced air ventilation, elevators for tall buildings, exterior lighting and electric heat. The new age of technology brought an increasingly high level of design and decorative art to many of the functional elements of mechanical, electrical and plumbing systems.

The visible decorative features of historic mechanical systems such as grilles, lighting fixtures, and ornamental switchplates may contribute to the overall historic character of the building. Their identification needs to take place, together with an evaluation of their physical condition, early in project planning. On the other hand, mechanical systems need to work efficiently so many older systems, such as compressors and their ductwork, and wiring and pipes often need to be upgraded or entirely replaced in order to meet modern requirements.

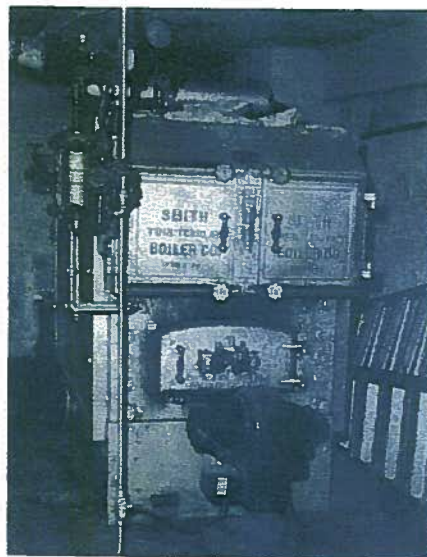

### Building Site

The building site consists of a historic building or buildings, structures, and associated landscape features within a designed or legally defined parcel of land. A site may be significant in its own right, or because of its association with the historic building or buildings. The relationship between buildings and landscape features on a site should be an integral part of planning for every work project.

### Setting (District/Neighborhood)

The setting is the larger area or environment in which a historic property is located. It may be an urban, suburban, or rural neighborhood or a natural landscape in which buildings have been constructed. The relationship of buildings to each other, setbacks, fence patterns, views, driveways and walkways, and street trees together create the character of a district or neighborhood.





### Special Requirements


*Work that must be done to meet accessibility requirements, health and safety requirements or retrofitting to improve energy efficiency is usually not part of the overall process of protecting historic buildings; rather, this work is assessed for its potential impact on the historic building.*

### Energy Efficiency

Some features of a historic building or site such as cupolas, shutters, transoms, skylights, sun rooms, porches, and plantings can play an energy-conserving role. Therefore, prior to retrofitting historic buildings to make them more energy efficient, the first step should always be to identify and evaluate existing historic features to assess their inherent energy-conserving potential. If it is determined that retrofitting measures are appropriate, then such work needs to be carried out with particular care to ensure that the building's historic character is retained.

### Accessibility Considerations

It is often necessary to make modifications to a historic building so that it will be in compliance with current accessibility code requirements. Accessibility to certain historic structures is required by three specific federal laws: the Architectural Barriers Act of 1968, Section 504 of the Rehabilitation Act of 1973, and the Americans with Disabilities Act of 1990. Federal rules, regulations, and standards have been developed which provide guidance on how to accomplish access to historic areas for people with disabilities. Work must be carefully planned and undertaken so that it does not result in the loss of character-defining spaces, features, and finishes. The goal is to provide the highest level of access with the lowest level of impact.



### Health and Safety Considerations

In undertaking work on historic buildings, it is necessary to consider the impact that meeting current health and safety codes (public health, occupational health, life safety, fire safety, electrical, seismic, structural, and building codes) will have on character-defining spaces, features, and finishes. Special coordination with the responsible code officials at the state, county, or municipal level may be required. Securing required building permits and occupancy licenses is best accomplished early in work project planning. It is often necessary to look beyond the "letter" of code requirements to their underlying purpose: most modern codes allow for alternative approaches and reasonable variance to achieve compliance.

Some historic building materials (insulation, lead paint, etc.) contain toxic substances that are potentially hazardous to building occupants. Following careful investigation and analysis, some form of abatement may be required. All workers involved in the encapsulation, repair, or removal of known toxic materials should be adequately trained and should wear proper personal protective gear. Finally, preventive and routine maintenance for historic structures known to contain such materials should also be developed to include proper warnings and precautions.



# Standards for Preservation & Guidelines for Preserving Historic Buildings

*Preservation is defined as the act or process of applying measures necessary to sustain the existing form, integrity, and materials of an historic property. Work, including preliminary measures to protect and stabilize the property, generally focuses upon the ongoing maintenance and repair of historic materials and features rather than extensive replacement and new construction. New exterior additions are not within the scope of this treatment; however, the limited and sensitive upgrading of mechanical, electrical, and plumbing systems and other code-required work to make properties functional is appropriate within a preservation project.*



## Standards for Preservation

1. A property will be used as it was historically, or be given a new use that maximizes the retention of distinctive materials, features, spaces, and spatial relationships. Where a treatment and use have not been identified, a property will be protected and, if necessary, stabilized until additional work may be undertaken.
2. The historic character of a property will be retained and preserved. The replacement of inexact or repairable historic materials or alteration of features, spaces, and spatial relationships that characterize a property will be avoided.
3. Each property will be recognized as a physical record of its time, place, and use. Work needed to stabilize, consolidate, and conserve existing historic materials and features will be physically and visually compatible, identifiable upon close inspection, and properly documented for future research.
4. Changes to a property that have acquired historic significance in their own right will be retained and preserved.
5. Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize a property will be preserved.
6. The existing condition of historic features will be evaluated to determine the appropriate level of intervention needed. Where the severity of deterioration requires repair or limited replacement of a distinctive feature, the new material will match the old in composition, design, color, and texture.
7. Chemical or physical treatments, if appropriate, will be undertaken using the gentlest means possible. Treatments that cause damage to historic materials will not be used.
8. Archeological resources will be protected and preserved in place. If such resources must be disturbed, mitigation measures will be undertaken.

## Guidelines for Preserving Historic Buildings

### Introduction

In Preservation, the options for replacement are less extensive than in the treatment, Rehabilitation. This is because it is assumed at the outset that building materials and character-defining features are essentially intact, i.e., that more historic fabric has survived, unchanged over time. The expressed goal of the Standards for Preservation and Guidelines for Preserving Historic Buildings is retention of the building's existing form, features and detailing. This may be as simple as basic maintenance of existing materials and features or may involve preparing a historic structure report, undertaking laboratory testing such as paint and mortar analysis, and hiring conservators to perform sensitive work such as reconstituting interior finishes. Protection, maintenance, and repair are emphasized while replacement is minimized.

### Identify, Retain, and Preserve Historic Materials and Features

The guidance for the treatment Preservation begins with recommendations to identify the form and detailing of those architectural materials and features that are important in defining the building's historic character and which must be retained in order to preserve that character. Therefore, guidance on *identifying, retaining, and preserving* character-defining features is always given first. The character of a historic building may be defined by the form and detailing of exterior materials, such as masonry, wood, and metal; exterior features, such as roofs, porches, and windows; interior materials, such as plaster and paint; and interior features, such as moldings and stairways, room configuration and spatial relationships, as well as structural and mechanical systems; and the building's site and setting.

### Stabilize Deteriorated Historic Materials and Features as a Preliminary Measure


Deteriorated portions of a historic building may need to be protected through preliminary stabilization measures until additional work can be undertaken. *Stabilizing* may include structural reinforcement, weatherization, or correcting unsafe conditions. Temporary stabilization should always be carried out in such a manner that it detracts as little as possible from the historic building's appearance. Although it may not be necessary in every preservation project, stabilization is nonetheless an integral part of the treatment Preservation; it is equally applicable, if circumstances warrant, for the other treatments.

### Protect and Maintain Historic Materials and Features

After identifying those materials and features that are important and must be retained in the process of Preservation work, then *protecting and maintaining* them are addressed. Protection generally involves the least degree of intervention and is preparatory to other work. For example, protection includes the maintenance of historic materials through treatments such as rust removal, caulking, limited paint removal, and re-application of protective coatings; the cyclical cleaning of roof gutter systems; or installation of fencing, alarm systems and other temporary protective measures. Although a historic building will usually require more extensive work, an overall evaluation of its physical condition should always begin at this level.

### Repair (Stabilize, Consolidate, and Conserve) Historic Materials and Features

Next, when the physical condition of character-defining materials and features requires additional work, *repairing by stabilizing, consolidating, and*

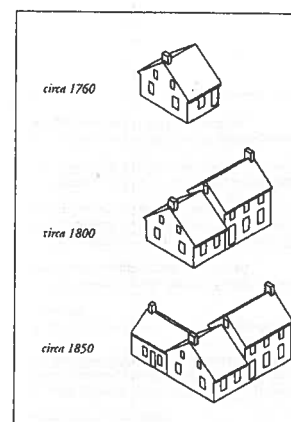

*This three-part drawing shows the evolution of a farm house over time. Such change is part of the history of the place and is respected within the treatment, Preservation. Drawing: Center for Historic Architecture and Engineering, University of Delaware (adapted from Preservation Brief 35: Understanding Old Buildings).*

*conserving* is recommended. Preservation strives to retain existing materials and features while employing as little new material as possible. Consequently, guidance for repairing a historic material, such as masonry, again begins with the least degree of intervention possible such as strengthening fragile materials through consolidation, when appropriate, and repointing with mortar of an appropriate strength. Repairing masonry may also include patching, splicing, or otherwise reinforcing them using recognized preservation methods. Similarly, within the treatment Preservation, portions of a historic structural system could be reinforced using contemporary materials such as steel rods. All work should be physically and visually compatible, identifiable upon close inspection and documented for future research.

### Limited Replacement in Kind of Extensively Deteriorated Portions of Historic Features

If repair by stabilization, consolidation, and conservation proves inadequate, the next level of intervention involves the *limited replacement in kind* of extensively deteriorated or missing parts of features when there are surviving prototypes (for example, brackets, dentils, steps, plaster, or portions of slate or tile roofing). The replacement material needs to match the old both physically and visually, i.e., wood with wood, etc. Thus, with the exception of hidden structural reinforcement and new mechanical system components, substitute materials are not appropriate in the treatment Preservation. Again, it is important that all new material be identified and properly documented for future research.

If prominent features are missing, such as an interior staircase, exterior cornice, or a roof dormer, then a Rehabilitation or Restoration treatment may be more appropriate.

#### Energy Efficiency/Accessibility Considerations/Health and Safety Code Considerations

These sections of the Preservation guidance address work done to meet accessibility requirements and health and safety code requirements; or limited retrofitting measures to improve energy efficiency. Although this work is quite often an important aspect of preservation projects, it is usually not part of the overall process of protecting, stabilizing, conserving, or repairing character-defining features; rather, such work is assessed for its potential negative impact on the building's character. For this reason, particular care must be taken not to obscure, damage, or destroy character-defining materials or features in the process of undertaking work to meet code and energy requirements.

*Preservation as a Treatment. When the property's distinctive materials, features, and spaces are essentially intact and thus convey the historic significance without extensive repair or replacement; when depiction at a particular period of time is not appropriate; and when a continuing or new use does not require additions or extensive alterations, Preservation may be considered as a treatment. Prior to undertaking work, a documentation plan for Preservation should be developed.*

## Preservation

### Building Exterior

Masonry: Brick, stone, terra cotta, concrete, adobe, stucco, and mortar

#### Recommended

*Identifying, retaining, and preserving* masonry features that are important in defining the overall historic character of the building such as walls, brackets, railings, cornices, window architraves, door pediments, steps, and columns; and details such as tooling and bonding patterns, coatings, and color.

*Stabilizing* deteriorated or damaged masonry as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* masonry by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved decorative features.

Cleaning masonry only when necessary to halt deterioration or remove heavy soiling.

Carrying out masonry surface cleaning tests after it has been determined that such cleaning is appropriate. Tests should be observed over a sufficient period of time so that both the immediate and the long range effects are known to enable selection of the gentlest method possible.

#### Not Recommended

Altering masonry features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic masonry features instead of repairing or replacing only the deteriorated masonry.

Applying paint or other coatings such as stucco to masonry that has been historically unpainted or uncoated.

Removing paint from historically painted masonry.

Changing the type of paint or coating or its color.

Failing to stabilize deteriorated or damaged masonry until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to evaluate and treat the various causes of mortar joint deterioration such as leaking roofs or gutters, differential settlement of the building, capillary action, or extreme weather exposure.

Cleaning masonry surfaces when they are not heavily soiled, thus needlessly introducing chemicals or moisture into historic materials.

Cleaning masonry surfaces without testing or without sufficient time for the testing results to be of value.



## Preservation

### Recommended

Cleaning masonry surfaces with the gentlest method possible, such as low pressure water and detergents, using natural bristle brushes.

Inspecting painted masonry surfaces to determine whether repainting is necessary.

Removing damaged or deteriorated paint only to the next sound layer using the gentlest method possible (e.g., hand-scraping) prior to repainting.

Applying compatible paint coating systems following proper surface preparation.

Repainting with colors that are historically appropriate to the building and district.

Evaluating the existing condition of the masonry to determine whether more than protection and maintenance are required, that is, if repairs to masonry features will be necessary.

*Repairing, stabilizing, and conserving* fragile masonry by using well-tested consolidants, when appropriate. Repairs should be physically and visually compatible and identifiable upon close inspection for future research.

### Not Recommended

Sandblasting brick or stone surfaces using dry or wet grit or other abrasives. These methods of cleaning permanently erode the surface of the material and accelerate deterioration.

Using a cleaning method that involves water or liquid chemical solutions when there is any possibility of freezing temperatures.

Cleaning with chemical products that will damage masonry, such as using acid on limestone or marble, or leaving chemicals on masonry surfaces.

Applying high pressure water cleaning methods that will damage historic masonry and the mortar joints.

Removing paint that is firmly adhering to, and thus protecting, masonry surfaces.

Using methods of removing paint which are destructive to masonry, such as sandblasting, application of caustic solutions, or high pressure waterblasting.

Failing to follow manufacturers' product and application instructions when repainting masonry.

Using new paint colors that are inappropriate to the historic building and district.

Failing to undertake adequate measures to assure the protection of masonry features.

Removing masonry that could be stabilized, repaired and conserved; or using untested consolidants and untrained personnel, thus causing further damage to fragile materials.

## Preservation



### Recommended

Repairing masonry walls and other masonry features by repointing the mortar joints where there is evidence of deterioration such as disintegrating mortar, cracks in mortar joints, loose bricks, damp walls, or damaged plasterwork.

Removing deteriorated mortar by carefully hand-raking the joints to avoid damaging the masonry.

Duplicating old mortar in strength, composition, color, and texture.

Duplicating old mortar joints in width and in joint profile.

*Adequate protection and maintenance of a historic building is an ongoing commitment. Here, two workers are priming and repainting exterior stone and wood trim. If surface treatments are neglected, more extensive repair and replacement will be required. Each less further undermines a building's historic integrity.*

### Not Recommended

Removing nondeteriorated mortar from sound joints, then repointing the entire building to achieve a uniform appearance.

Using electric saws and hammers rather than hand tools to remove deteriorated mortar from joints prior to repointing.

Repointing with mortar of high portland cement content (unless it is the content of the historic mortar). This can often create a bond that is stronger than the historic material and can cause damage as a result of the differing coefficient of expansion and the differing porosity of the material and the mortar.

Repointing with a synthetic caulking compound.

Using a "scrub" coating technique to repoint instead of traditional repointing methods.

Changing the width or joint profile when repointing.

## Preservation

### Recommended

Repairing stucco by removing the damaged material and patching with new stucco that duplicates the old in strength, composition, color, and texture.

Using mud plaster as a surface coating over unfired, unstabilized adobe because the mud plaster will bond to the adobe.

Cutting damaged concrete back to remove the source of deterioration (often corrosion on metal reinforcement bars). The new patch must be applied carefully so it will bond satisfactorily with, and match, the historic concrete.

Repairing masonry features by patching, piecing-in, or otherwise reinforcing the masonry using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

Applying new or non-historic surface treatments such as water-repellent coatings to masonry only after repointing and only if masonry repairs have failed to arrest water penetration problems.

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of masonry features when there are surviving prototypes such as wrought-iron brackets or stone balusters. The new work should match the old in material, design, color, and texture; and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Removing sound stucco; or repairing with new stucco that is stronger than the historic material or does not convey the same visual appearance.

Applying cement stucco to unfired, unstabilized adobe. Because the cement stucco will not bond properly, moisture can become entrapped between materials, resulting in accelerated deterioration of the adobe.

Patching concrete without removing the source of deterioration.

Removing masonry that could be repaired, using improper repair techniques, or failing to document the new work.

Applying waterproof, water repellent, or non-historic coatings such as stucco to masonry as a substitute for repointing and masonry repairs. Coatings are frequently unnecessary, expensive, and may change the appearance of historic masonry as well as accelerate its deterioration.

### Not Recommended

Replacing an entire masonry feature such as a column or stairway when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic masonry feature; or failing to properly document the new work.

## Preservation

### Building Exterior

#### Wood: Clapboard, weatherboard, shingles, and other wooden siding and decorative elements

### Recommended

Identifying, retaining, and preserving wood features that are important in defining the overall historic character of the building such as siding, cornices, brackets, window architraves, and doorway pediments; and their paints, finishes, and colors.

Stabilizing deteriorated or damaged wood as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

Protecting and maintaining wood features by providing proper drainage so that water is not allowed to stand on flat, horizontal surfaces or accumulate in decorative features.

Applying chemical preservatives to wood features such as beam ends or outriggers that are exposed to decay hazards and are traditionally unpainted.

Retaining coatings such as paint that help protect the wood from moisture and ultraviolet light. Paint removal should be considered only where there is paint surface deterioration and as part of an overall maintenance program which involves repainting or applying other appropriate protective coatings.

Inspecting painted wood surfaces to determine whether repainting is necessary or if cleaning is all that is required.

Removing damaged or deteriorated paint to the next sound layer using the gentlest method possible (handscraping and hand-sanding), then repainting.

### Not Recommended

Altering wood features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic wood features instead of repairing or replacing only the deteriorated wood.

Changing the type of paint or finish and its color.

Failing to stabilize deteriorated or damaged wood until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to identify, evaluate, and treat the causes of wood deterioration, including faulty flashing, leaking gutters, cracks and holes in siding, deteriorated caulking in joints and seams, plant material growing too close to wood surfaces, or insect or fungus infestation.

Using chemical preservatives such as creosote which, unless they were used historically, can change the appearance of wood features.

Stripping paint or other coatings to reveal bare wood, thus exposing historically coated surfaces to the effects of accelerated weathering.

Removing paint that is firmly adhering to, and thus, protecting wood surfaces.

Using destructive paint removal methods such as propane or butane torches, sandblasting or waterblasting. These methods can irreversibly damage historic woodwork.

## Preservation

### Recommended

Using with care electric hot-air guns on decorative wood features and electric heat plates on flat wood surfaces when paint is so deteriorated that total removal is necessary prior to repainting.

Using chemical strippers primarily to supplement other methods such as handscraping, handsanding and the above-recommended thermal devices. Detachable wooden elements such as shutters, doors, and columns may—with the proper safeguards—be chemically dip-stripped.

Applying comparable paint coating systems following proper surface preparation.

### Not Recommended

Using thermal devices improperly so that the historic woodwork is scorched.

Failing to neutralize the wood thoroughly after using chemicals so that new paint does not adhere.

Allowing detachable wood features to soak too long in a caustic solution so that the wood grain is raised and the surface roughened.

Failing to follow manufacturers' product and application instructions when repainting exterior woodwork.



Maximizing retention of historic materials and features is the primary goal of Preservation as demonstrated here in these "before" and "after" photographs. Aside from some minor repairs and limited replacement of deteriorated material, work on this house consisted primarily of repainting the wood exterior. Photos: Historic Charleston Foundation.

## Preservation

### Recommended

Repainting with colors that are appropriate to the historic building and district.

Evaluating the existing condition of the wood to determine whether more than protection and maintenance are required, that is, if repairs to wood features will be necessary.

*Repairing, stabilizing, and conserving* fragile wood using well-tested consolidants, when appropriate. Repairs should be physically and visually comparable and identifiable upon close inspection for future research.

Repairing wood features by patching, piecing-in, or otherwise reinforcing the wood using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

### Not Recommended

Using new colors that are inappropriate to the historic building or district.

Failing to undertake adequate measures to assure the protection of wood features.

Removing wood that could be stabilized and conserved; or using untested consolidants and untrained personnel, thus causing further damage to fragile historic materials.

Removing wood that could be repaired, using improper repair techniques, or failing to document the new work.

The following work is highlighted to indicate that it represents the greatest degree of intervention that is generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of wood features when there are surviving prototypes such as brackets, molding, or sections of siding. New work should match the old in material, design, color, and texture, and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Replacing an entire wood feature such as a column or stairway when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic wood feature, or failing to properly document the new work.

## Preservation

### Building Exterior

**Architectural Metals:** Cast iron, steel, pressed tin, copper, aluminum, and zinc

#### *Recommended*

*Identifying, retaining, and preserving* architectural metal features such as columns, capitals, window hoods, or stairways that are important in defining the overall historic character of the building; and their finishes and colors. Identification is also critical to differentiate between metals prior to work. Each metal has unique properties and thus requires different treatments.

*Stabilizing* deteriorated or damaged architectural metals as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* architectural metals from corrosion by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved, decorative features.

Cleaning architectural metals, when appropriate, to remove corrosion prior to repainting or applying other appropriate protective coatings.

Identifying the particular type of metal prior to any cleaning procedure and then testing to assure that the gentlest cleaning method possible is selected or determining that cleaning is inappropriate for the particular metal.

#### *Not Recommended*

Altering architectural metal features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic metal features instead of repairing or replacing only the deteriorated metal.

Changing the type of finish or its historic color or accent scheme.

Failing to stabilize deteriorated or damaged architectural metals until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to identify, evaluate, and treat the causes of corrosion, such as moisture from leaking roofs or gutters.

Placing incompatible metals together without providing a reliable separation material. Such incompatibility can result in galvanic corrosion of the less noble metal, e.g., copper will corrode cast iron, steel, tin, and aluminum.

Exposing metals which were intended to be protected from the environment.

Applying paint or other coatings to metals such as copper, bronze, or stainless steel that were meant to be exposed.

Using cleaning methods which alter or damage the historic color, texture, and finish of the metal; or cleaning when it is inappropriate for the metal.

Removing the patina of historic metal. The patina may be a protective coating on some metals, such as bronze or copper, as well as a significant historic finish.

## Preservation

#### *Recommended*

Cleaning soft metals such as lead, tin, copper, terneplate, and zinc with appropriate chemical methods because their finishes can be easily abraded by blasting methods.

Using the gentlest cleaning methods for cast iron, wrought iron, and steel—hard metals—in order to remove paint buildup and corrosion. If handscraping and wire brushing have proven ineffective, low pressure grit blasting may be used as long as it does not abrade or damage the surface.

Applying appropriate paint or other coating systems after cleaning in order to decrease the corrosion rate of metals or alloys.

Repainting with colors that are appropriate to the historic building or district.

Applying an appropriate protective coating such as lacquer to an architectural metal feature such as a bronze door which is subject to heavy pedestrian use.

Evaluating the existing condition of the architectural metals to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

#### *Not Recommended*

Cleaning soft metals such as lead, tin, copper, terneplate, and zinc with grit blasting which will abrade the surface of the metal.

Failing to employ gentler methods prior to abrasively cleaning cast iron, wrought iron or steel; or using high pressure grit blasting.

Failing to re-apply protective coating systems to metals or alloys that require them after cleaning so that accelerated corrosion occurs.

Using new colors that are inappropriate to the historic building or district.

Failing to assess pedestrian use or new access patterns so that architectural metal features are subject to damage by use or inappropriate maintenance such as salting adjacent sidewalks.

Failing to undertake adequate measures to assure the protection of architectural metal features.

## Preservation

### Recommended

Repairing, stabilizing, and conserving fragile architectural metals using well-tested consolidants, when appropriate. Repairs should be physically and visually compatible and identifiable upon close inspection for future research.

Repairing architectural metal features by patching, piecing-in, or otherwise reinforcing the metal using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.



### Not Recommended

Removing architectural metals that could be stabilized and conserved; or using untested consolidants and untrained personnel, thus causing further damage to fragile historic materials.

Removing architectural metals that could be repaired, using improper repair techniques, or failing to document the new work.



Two examples of "limited replacement in kind" point out an appropriate scope of work within the treatment, Preservation. (a) One metal modillion that has sustained damage from a faulty gutter will need to be replaced; and (b) targeted repairs to deteriorated wood cornice elements (fascia board and modillions) mean that most of the historic materials were retained in the work.

## Preservation

The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of architectural metal features when there are surviving prototypes such as porch balustrades, column capitals or bases, or porch cresting. The new work should match the old in material, design, and texture, and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Replacing an entire architectural metal feature such as a column or balustrade when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic metal feature, or failing to properly document the new work.

## Building Exterior

### Roofs

#### Recommended

*Identifying, retaining, and preserving roofs*—and their functional and decorative features—that are important in defining the overall historic character of the building. This includes the roof's shape, such as hipped, gambrel, and mansard; decorative features such as cupolas, cresting, chimneys, and weathervanes; and roofing material such as slate, wood, clay tile, and metal, as well as its size, color, and patterning.

*Stabilizing* deteriorated or damaged roofs as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.



*It is particularly important to preserve materials that contribute to a building's historic character, such as this highly visible slate roof. In the event that repair and limited replacement are necessary, all new slate would need to match the old exactly. Photo: Jeffrey S. Levine.*

## Preservation

#### Not Recommended

Altering the roof and roofing materials which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic roofing material instead of repairing or replacing only the deteriorated material.

Changing the type or color of roofing materials.

Failing to stabilize a deteriorated or damaged roof until additional work is undertaken, thus allowing further damage to occur to the historic building.

## Preservation

#### Recommended

*Protecting and maintaining* a roof by cleaning the gutters and downspouts and replacing deteriorated flashing. Roof sheathing should also be checked for proper venting to prevent moisture condensation and water penetration; and to insure that materials are free from insect infestation.

Providing adequate anchorage for roofing material to guard against wind damage and moisture penetration.

Protecting a leaking roof with plywood and building paper until it can be properly repaired.

*Repairing* a roof by reinforcing the historic materials which comprise roof features using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

#### Not Recommended

Failing to clean and maintain gutters and downspouts properly so that water and debris collect and cause damage to roof fasteners, sheathing, and the underlying structure.

Allowing roof fasteners, such as nails and clips to corrode so that roofing material is subject to accelerated deterioration.

Permitting a leaking roof to remain unprotected so that accelerated deterioration of historic building materials—masonry, wood, plaster, paint and structural members—occurs.

Removing materials that could be repaired, using improper repair techniques, or failing to document the new work.

Failing to reuse intact slate or tile when only the roofing substrate needs replacement.

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

#### Recommended

##### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of roof features or roof coverings when these are surviving prototypes such as cupola bays, dentils, dormer roofing, or slates, tiles, or wood shingles on a main roof. The new work should match the old in material, design, color, and texture, and be unobtrusively dated to guide future research and treatment.

#### Not Recommended

Replacing an entire roof feature such as a cupola or dormer when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic roof feature, or failing to properly document the new work.

## Building Exterior

### Windows

#### Recommended

*Identifying, retaining, and preserving* windows—and their functional and decorative features—that are important in defining the overall historic character of the building. Such features can include frames, sash, muntins, glazing, sills, heads, hoodmolds, paneled or decorated jambs and moldings, and interior and exterior shutters and blinds.



#### Not Recommended

Altering windows or window features which are important in defining the historic character of the building so that, as a result, the character is diminished.

Changing the historic appearance of windows by replacing materials, finishes, or colors which noticeably change the sash, depth of reveal, and muntin configuration; the reflectivity and color of the glazing; or the appearance of the frame.

Obscuring historic window trim with metal or other material.

*Preserving a building's historic windows generally involves scraping, sanding, and re-painting. While some repair work will most likely be undertaken within the scope of work on this institutional building, replacement of the window units is usually not an appropriate preservation treatment. Photo: Chuck Fisher.*

## Preservation

## Preservation

#### Recommended

Conducting an indepth survey of the condition of existing windows early in preservation planning so that repair and upgrading methods and possible replacement options can be fully explored.

*Stabilizing* deteriorated or damaged windows as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* the wood and architectural metals which comprise the window frame, sash, muntins, and surrounds through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Making windows weathertight by re-caulking and replacing or installing weatherstripping. These actions also improve thermal efficiency.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, i.e. if repairs to windows and window features will be required.

*Repairing* window frames and sash by patching, piecing-in, consolidating or otherwise reinforcing them using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

#### Not Recommended

Replacing windows solely because of peeling paint, broken glass, stuck sash, and high air infiltration. These conditions, in themselves, are no indication that windows are beyond repair.

Failing to stabilize a deteriorated or damaged window until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of the window results.

Retrofitting or replacing windows rather than maintaining the sash, frame, and glazing.

Failing to undertake adequate measures to assure the protection of historic windows.

Failing to protect the historic glazing when repairing windows.

Removing material that could be repaired, using improper repair techniques, or failing to document the new work.

Failing to reuse serviceable window hardware such as brass sash lifts and sash locks.



## Preservation

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of windows when there are surviving prototypes such as frames, sash, sills, glazing, and hoodmolds. The new work should match the old in material, design, color, and texture; and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Replacing an entire window when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic window; or failing to properly document the new work.

## Preservation

### Building Exterior

#### Entrances and Porches

##### Recommended

*Identifying, retaining, and preserving* entrances and porches—and their functional and decorative features—that are important in defining the overall historic character of the building such as doors, fanlights, sidelights, pilasters, entablatures, columns, balustrades, and stairs.

*Stabilizing* deteriorated or damaged entrances and porches as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* the masonry, wood, and architectural metals that comprise entrances and porches through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, that is, repairs to entrance and porch features will be necessary.

*Repairing* entrances and porches by reinforcing the historic materials using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

##### Not Recommended

Altering entrances and porches which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic entrance and porch features instead of repairing or replacing only the deteriorated material.

Failing to stabilize a deteriorated or damaged entrance or porch until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of entrances and porches results.

Failing to undertake adequate measures to assure the protection of historic entrances and porches.

Removing material that could be repaired, using improper repair techniques, or failing to document the new work.



## Preservation

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, mobilization, and repair concerns have been addressed.*

### Limited Replacements in Kind

#### Recommended

Replacing in kind extensively deteriorated or missing parts of entrance and porch features when there are surviving prototypes such as balustrades, cornices, entablatures, columns, sidelights, and stairs. The new work should match the old in material, design, color, and texture, and be unobtrusively dated to guide future research and treatment.

#### Not Recommended

Replacing an entire entrance or porch feature when limited replacement of deteriorated and missing parts is appropriate. Using replacement material that does not match the historic entrance or porch feature, or failing to properly document the new work.

## Preservation

### Building Exterior

#### Storefronts

##### Recommended

Identifying, retaining, and preserving storefronts—and their functional and decorative features—that are important in defining the overall historic character of the building such as display windows, signs, doors, transoms, kick plates, corner posts, and entablatures.


Stabilizing deteriorated or damaged storefronts as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

##### Not Recommended

Altering storefronts—and their features—which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic storefront features instead of repairing or replacing only the deteriorated material.

Failing to stabilize a deteriorated or damaged storefront until additional work is undertaken, thus allowing further damage to occur to the historic building.



*The original form and features of this 1920s storefront have been retained through Preservation. Photo: David W. Look, AIA.*

## Preservation

### Recommended

*Protecting and maintaining* masonry, wood, and architectural metals which comprise storefronts through appropriate treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

Protecting storefronts against arson and vandalism before work begins by boarding up windows and doors and installing alarm systems that are keyed into local protection agencies.

Evaluating the existing condition of storefront materials to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

*Repairing* storefronts by reinforcing the historic materials using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of storefronts where there are surviving prototypes such as transoms, kick plates, pilasters, or signs. The new work should match the old in materials, design, color, and texture; and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of storefront features results.

Permitting entry into the building through unsecured or broken windows and doors so that interior features and finishes are damaged by exposure to weather or vandalism.

Stripping storefronts of historic material such as wood, cast iron, terra cotta, carrara glass, and brick.

Failing to undertake adequate measures to assure the preservation of the historic storefront.

Removing material that could be repaired, using improper repair techniques, or failing to document the new work.

### Not Recommended

Replacing an entire storefront when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the historic storefront feature; or failing to properly document the new work.

## Preservation

### Building Interior

#### Structural Systems

##### Recommended

*Identifying, retaining, and preserving* structural systems—and individual features of systems—that are important in defining the overall historic character of the building, such as post and beam systems, trusses, summer beams, vigas, cast iron columns, above-grade stone foundation walls, or load-bearing brick or stone walls.

*Stabilizing* deteriorated or damaged structural systems as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* the structural system by cleaning the roof gutters and downspouts; replacing roof flashing; keeping masonry, wood, and architectural metals in a sound condition; and ensuring that structural members are free from insect infestation.

Examining and evaluating the existing condition of the structural system and its individual features using non-destructive techniques such as X-ray photography.

##### Not Recommended

Altering visible features of historic structural systems which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Overloading the existing structural system, or installing equipment or mechanical systems which could damage the structure.

Replacing a loadbearing masonry wall that could be augmented and retained.

Leaving known structural problems untreated such as deflection of beams, cracking and bowing of walls, or racking of structural members.

Utilizing treatments or products that accelerate the deterioration of structural material such as introducing urea-formaldehyde foam insulation into frame walls.

Failing to stabilize a deteriorated or damaged structural system until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to provide proper building maintenance so that deterioration of the structural system results. Causes of deterioration include subsurface ground movement, vegetation growing too close to foundation walls, improper grading, fungal rot, and poor interior ventilation that results in condensation.

Utilizing destructive probing techniques that will damage or destroy structural material.

## Preservation

### Recommended

Repairing the structural system by augmenting or upgrading individual parts or features using recognized preservation methods. For example, weakened structural members such as floor framing can be paired with a new member, braced, or otherwise supplemented and reinforced.

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation and should be only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind those visible portions or features of the structural system that are either extensively deteriorated or missing when there are surviving prototypes such as cast iron columns and sections of loadbearing walls. The new work should match the old in materials, design, color, and texture, and be unobtrusively dated to guide future research and treatment.

Considering the use of substitute material for unexposed structural replacements, such as roof rafters or trusses. Substitute material should, at a minimum, have equal loadbearing capabilities, and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Upgrading the building structurally in a manner that diminishes the historic character of the exterior, such as installing strapping channels or removing a decorative cornice; or damages interior features or spaces.

Replacing a structural member or other feature of the structural system when it could be augmented and retained.

### Not Recommended

Replacing an entire visible feature of the structural system when limited replacement of deteriorated and missing portions is appropriate.

Using material for a portion of an exposed structural feature that does not match the historic feature, or failing to properly document the new work.

Using substitute material that does not equal the loadbearing capabilities of the historic material or design or is otherwise physically or chemically incompatible.

## Preservation

### Building Interior

#### Spaces, Features, and Finishes

### Recommended

#### Interior Spaces

Identifying, retaining, and preserving a floor plan or interior spaces that are important in defining the overall historic character of the building. This includes the size, configuration, proportion, and relationship of rooms and corridors; the relationship of features to spaces; and the spaces themselves such as lobbies, reception halls, entrance halls, double parlors, theaters, auditoriums, and important industrial or commercial spaces.

### Not Recommended

Altering a floor plan or interior spaces—including individual rooms—which are important in defining the overall historic character of the building so that, as a result, the character is diminished.



Careful documentation of a building's physical condition is the critical first step in determining an appropriate level of intervention. (a) This may include relating the historical research to existing materials and features; or (b) documenting a particular problem such as this cracked ceiling. Photo (a): Jean E. Travers; Photo (b): Lee H. Nelson, FAIA.



#### *Recommended*

##### **Interior Features and Finishes**

*Identifying, retaining, and preserving* interior features and finishes that are important in defining the overall historic character of the building, including columns, cornices, baseboards, fireplaces and mantels, panelling, light fixtures, hardware, and flooring; and wallpaper, plaster, paint, and finishes such as stencilling, marbling, and graining; and other decorative materials that accent interior features and provide color, texture, and patterning to walls, floors, and ceilings.

*Stabilizing* deteriorated or damaged interior features and finishes as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* masonry, wood, and architectural metals that comprise interior features through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

#### *Not Recommended*

Altering features and finishes which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing historic interior features and finishes instead of repairing or replacing only the deteriorated masonry.

Installing new decorative material that obscures or damages character-defining interior features or finishes.

Removing historic finishes, such as paint and plaster, or historic wall coverings, such as wallpaper.

Applying paint, plaster, or other finishes to surfaces that have been historically unfinished.

Stripping paint to bare wood rather than repairing or reapplying grained or marbled finishes to features such as doors and panelling.

Changing the type of finish or its color, such as painting a previously varnished wood feature.

Failing to stabilize a deteriorated or damaged interior feature or finish until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of interior features results.

#### **Preservation**

#### **Preservation**

#### *Recommended*

Protecting interior features and finishes against arson and vandalism before project work begins, boarding-up windows, and installing fire alarm systems that are keyed to local protection agencies.

Protecting interior features such as a staircase, mantel, or decorative finishes and wall coverings against damage during project work by covering them with heavy canvas or plastic sheets.

Installing protective coverings in areas of heavy pedestrian traffic to protect historic features such as wall coverings, parquet flooring and panelling.

Removing damaged or deteriorated paints and finishes to the next sound layer using the gentlest method possible, then repainting or refinishing using compatible paint or other coating systems.

Repainting with colors that are appropriate to the historic building.

Limiting abrasive cleaning methods to certain industrial warehouse buildings where the interior masonry or plaster features do not have distinguishing design, detailing, tooling, or finishes; and where wood features are not finished, molded, beaded, or worked by hand. Abrasive cleaning should only be considered after other, gentler methods have been proven ineffective.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, that is, if repairs to interior features and finishes will be necessary.

#### *Not Recommended*

Permitting entry into historic buildings through unsecured or broken windows and doors so that the interior features and finishes are damaged by exposure to weather or vandalism.

Stripping interiors of features such as woodwork, doors, windows, light fixtures, copper piping, radiators; or of decorative materials.

Failing to provide proper protection of interior features and finishes during work so that they are gouged, scratched, dented, or otherwise damaged.

Failing to take new use patterns into consideration so that interior features and finishes are damaged.

Using destructive methods such as propane or butane torches or sandblasting to remove paint or other coatings. These methods can irreversibly damage the historic materials that comprise interior features.

Using new paint colors that are inappropriate to the historic building.

Changing the texture and patina of character-defining features through sandblasting or use of abrasive methods to remove paint, discoloration or plaster. This includes both exposed wood (including structural members) and masonry.

Failing to undertake adequate measures to assure the protection of interior features and finishes.

## Preservation

### Recommended

Repairing historic interior features and finishes by reinforcing the materials using recognized preservation methods. The new work should match the old in material, design, color, and texture; and be unobtrusively dated to guide future research and treatment.



### Not Recommended

Removing materials that could be repaired, using improper techniques, or failing to document the new work.



In Preservation, an appropriate level of intervention is established prior to work in order to maximize retention of historic materials.  
(a) A conservator is applying adhesive to 19th-century composition ornaments that has delaminated from its wood substrate.  
(b) The composition fragment is carefully held in place until the quick-setting adhesive takes hold. Photos: Jonathan Thomson.

## Preservation

The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of repeated interior features when there are surviving prototypes such as stairs, balustrades, wood paneling, columns, or decorative wall coverings or ornamental tin or plaster ceilings. New work should match the old in material, design, color, and texture; and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Replacing an entire interior feature when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the interior feature; or failing to properly document the new work.

## Building Interior

Mechanical Systems: Heating, Air Conditioning, Electrical, and Plumbing

### Recommended

*Identifying, retaining, and preserving* visible features of early mechanical systems that are important in defining the overall historic character of the building, such as radiators, vents, fans, grilles, plumbing fixtures, switchplates, and lights.

*Stabilizing* deteriorated or damaged mechanical systems as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Protecting and maintaining* mechanical, plumbing, and electrical systems and their features through cyclical cleaning and other appropriate measures.

*Preventing* accelerated deterioration of mechanical systems by providing adequate ventilation of attics, crawlspaces, and cellars so that moisture problems are avoided.

*Improving* the energy efficiency of existing mechanical systems to help reduce the need for elaborate new equipment.

*Repairing* mechanical systems by augmenting or upgrading system parts, such as installing new pipes and ducts; rewiring; or adding new compressors or boilers.

*Replacing* in kind those visible features of mechanical systems that are either extensively deteriorated or are prototypes such as ceiling fans, switchplates, radiators, grilles, or plumbing fixtures.

### Not Recommended

Removing or altering visible features of mechanical systems that are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Failing to stabilize a deteriorated or damaged mechanical system until additional work is undertaken, thus allowing further damage to occur to the historic building.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of mechanical systems and their visible features results.

Enclosing mechanical systems in areas that are not adequately ventilated so that deterioration of the systems results.

Installing unnecessary climate control systems which can add excessive moisture to the building. This additional moisture can either condense inside, damaging interior surfaces, or pass through interior walls to the exterior, potentially damaging adjacent materials as it migrates.

Replacing a mechanical system or its functional parts when it could be upgraded and retained.

Installing a visible replacement feature that does not convey the same visual appearance.

*The following should be considered in a Preservation project when the installation of new mechanical equipment or system is required to make the building functional.*

### Recommended

Installing a new mechanical system if required, so that it causes the least alteration possible to the building.

Providing adequate structural support for new mechanical equipment.

Installing the vertical runs of ducts, pipes, and cables in closets, service rooms, and wall cavities.

Installing air conditioning in such a manner that historic features are not damaged or obscured and excessive moisture is not generated that will accelerate deterioration of historic materials.

### Not Recommended

Installing a new mechanical system so that character-defining structural or interior features are radically changed, damaged, or destroyed.

Failing to consider the weight and design of new mechanical equipment so that, as a result, historic structural members or finished surfaces are weakened or cracked.

Installing vertical runs of ducts, pipes, and cables in places where they will obscure character-defining features.

Concealing mechanical equipment in walls or ceilings in a manner that requires excessive removal of historic building material.

Cutting through features such as masonry walls in order to install air conditioning units.



## Building Site

*Recommended*

*Identifying, retaining, and preserving* buildings and their features as well as features of the site that are important in defining its overall historic character. Site features may include circulation systems such as walks, paths, roads, or parking; vegetation such as trees, shrubs, fields, or herbaceous plant material; landforms such as terracing, berms or grading; furnishings such as lights, fences, or benches; decorative elements such as sculpture, statuary or monuments; water features including fountains, streams, pools, or lakes; and subsurface archeological features which are important in defining the history of the site.

Retaining the historic relationship between buildings and the landscape.

*Stabilizing* deteriorated or damaged building and site features as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

*Not Recommended*

Altering buildings and their features or site features which are important in defining the overall historic character of the property so that, as a result, the character is diminished.

Removing or relocating buildings or landscape features, thus destroying the historic relationship between buildings and the landscape.

Failing to stabilize a deteriorated or damaged building or site feature until additional work is undertaken, thus allowing further damage to occur to the building site.

*Drayton Hall, near Charleston, South Carolina, is an excellent example of an evolved 18th century plantation. Of particular note in this photograph are the landscape features added in the late 19th century—a reflecting pond and rose mound. With an overall Preservation treatment plan, these later features have been retained and protected. If a Restoration treatment had been selected, later features of the landscape as well as changes to the house would have been removed. Photo: Courtesy, National Trust for Historic Preservation.*

*Recommended*

*Protecting and maintaining* buildings and sites by providing proper drainage to assure that water does not erode foundation walls; drain toward the buildings; or damage or erode the landscape.

Minimizing disturbance of terrain around buildings or elsewhere on the site, thus reducing the possibility of destroying or damaging important landscape features or archeological resources.

Surveying and documenting areas where the terrain will be altered to determine the potential impact to important landscape features or archeological resources.

Protecting, e.g., preserving in place, important archeological resources.

Planning and carrying out any necessary investigation using professional archeologists and modern archeological methods when preservation in place is not feasible.

Preserving important landscape features, including ongoing maintenance of historic plant material.

Protecting building and landscape features against arson and vandalism before preservation work begins, i.e., erecting protective fencing and installing alarm systems that are keyed into local protection agencies.

Providing continued protection of historic building materials and plant features through appropriate cleaning, rust removal, limited paint removal, and re-application of protective coating systems; and pruning and vegetation management.

*Not Recommended*

Failing to maintain adequate site drainage so that buildings and site features are damaged or destroyed; or alternatively, changing the site grading so that water no longer drains properly.

Introducing heavy machinery into areas where it may disturb or damage important landscape features or archeological resources.

Failing to survey the building site prior to beginning work which results in damage to, or destruction of, important landscape features or archeological resources.

Leaving known archeological material unprotected so that it is damaged during preservation work.

Permitting unqualified personnel to perform data recovery on archeological resources so that improper methodology results in the loss of important archeological material.

Allowing important landscape features to be lost or damaged due to a lack of maintenance.

Permitting the property to remain unprotected so that the building and landscape features or archeological resources are damaged or destroyed.

Removing or destroying features from the buildings or site such as wood siding, iron fencing, masonry balustrades, or plant material.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of building and site feature results.

## Preservation

### Recommended

Evaluating the existing condition of materials and features to determine whether more than protection and maintenance are required, that is, if repairs to building and site features will be necessary.

Repairing features of the building and site by reinforcing historic materials using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

*The following work is highlighted to indicate that it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of the building or site where there are surviving prototypes such as part of a fountain, or portions of a walkway. New work should match the old in materials, design, color, and texture; and be unobtrusively dated to guide future research and treatment.

### Not Recommended

Failing to undertake adequate measures to assure the protection of building and site features.

Removing materials that could be repaired, using improper repair techniques, or failing to document the new work.

### Not Recommended

Replacing an entire feature of the building or site when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the building site features; or failing to properly document the new work.

## Preservation

### Setting (District/Neighborhood)

#### Recommended

Identifying retaining, and preserving building and landscape features which are important in defining the historic character of the setting. Such features can include roads and streets, furnishings such as lights or benches, vegetation, gardens and yards, adjacent open space such as fields, parks, commons or woodlands, and important views or visual relationships.

Retaining the historic relationship between buildings and landscape features of the setting. For example, preserving the relationship between a town common and its adjacent historic houses, municipal buildings, historic roads, and landscape features.

Stabilizing deteriorated or damaged building and landscape features of the setting as a preliminary measure, when necessary, prior to undertaking appropriate preservation work.

Protecting and maintaining historic building materials and plant features through appropriate cleaning, rust removal, limited paint removal, and reapplication of protective coating systems; and pruning and vegetation management.

Protecting building and landscape features against arson and vandalism before preservation work begins by erecting protective fencing and installing alarm systems that are keyed into local preservation agencies.

Evaluating the existing condition of the building and landscape features to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

#### Not Recommended

Altering those features of the setting which are important in defining the historic character.

Altering the relationship between the buildings and landscape features within the setting by widening existing streets, changing landscape materials, or constructing inappropriately located new streets or parking.

Removing or relocating historic buildings or landscape features, thus destroying their historic relationship within the setting.

Failing to stabilize a deteriorated or damaged building or landscape feature of the setting until additional work is undertaken, thus allowing further damage to the setting to occur.

Failing to provide adequate protection of materials on a cyclical basis which results in the deterioration of building and landscape features.

Permitting the building and setting to remain unprotected so that interior or exterior features are damaged.

Stripping or removing features from buildings or the setting such as wood siding, iron fencing, terra cotta balustrades, or plant material.

Failing to undertake adequate measures to assure the protection of building and landscape features.



## Preservation

### Recommended

Repairing features of the building and landscape using recognized preservation methods. The new work should be unobtrusively dated to guide future research and treatment.

*The following work is highlighted because it represents the greatest degree of intervention generally recommended within the treatment Preservation, and should only be considered after protection, stabilization, and repair concerns have been addressed.*

### Recommended

#### Limited Replacement in Kind

Replacing in kind extensively deteriorated or missing parts of building and landscape features where there are surviving prototypes such as porch balustrades or paving materials.

### Not Recommended

Removing material that could be repaired, using improper repair techniques, or failing to document the new work.

### Not Recommended

Replacing an entire feature of the building or landscape when limited replacement of deteriorated and missing parts is appropriate.

Using replacement material that does not match the building or landscape feature; or failing to properly document the new work.



*The goal of Preservation is to retain the historic form, materials, and features of the building and its site as they have changed—over time. This bank barn was built in the 1820s, then enlarged in 1898 and again in 1914. Today, it continues its role as a working farm structure as a result of sensitive preservation work. This included foundation re-grading, a new gutter system, structural strengthening, and replacement of a severely deteriorated metal roof. Photo: Jack E. Boucher, HABs.*

Setting 55

## Preservation

*Although the work in the following sections is quite often an important aspect of preservation projects, it is usually not part of the overall process of preserving character-defining features (maintenance, repair, and limited replacement); rather, such work is assessed for its potential negative impacts on the building's historic character. For this reason, particular care must be taken not to obscure, alter, or damage character-defining features in the process of preservation work.*

### Energy Efficiency

#### Recommended

##### Masonry/Wood/Architectural Metals

Installing thermal insulation in attics and in unheated cellars and crawlspaces to increase the efficiency of the existing mechanical systems.

Installing insulating material on the inside of masonry walls to increase energy efficiency where there is no character-defining interior molding around the windows or other interior architectural detailing.

##### Windows

Utilizing the inherent energy conserving features of a building by maintaining windows and louvered blinds in good operable condition for natural ventilation.

Improving thermal efficiency with weatherstripping, storm windows, caulking, interior shades, and if historically appropriate, blinds and awnings.

Installing interior storm windows with air-tight gaskets, ventilating holes, and/or removable clips to insure proper maintenance and to avoid condensation damage to historic windows.

Installing exterior storm windows which do not damage or obscure the windows and frames.

#### Not Recommended

Applying thermal insulation with a high moisture content in wall cavities which may damage historic fabric.

Installing wall insulation without considering its effect on interior molding or other architectural detailing.

Removing historic shading devices rather than keeping them in an operable condition.

Replacing historic multi-paned sash with new thermal sash utilizing false muntins.

Installing interior storm windows that allow moisture to accumulate and damage the window.

Installing new exterior storm windows which are inappropriate in size or color.

Replacing windows or transoms with fixed thermal glazing or permitting windows and transoms to remain inoperable rather than utilizing them for their energy conserving potential.

56 Energy Efficiency

## Preservation

### *Recommended*

#### *Entrances and Porches*

Maintaining porches and double vestibule entrances so that they can retain heat or block the sun and provide natural ventilation.

#### *Interior Features*

Retaining historic interior shutters and transoms for their inherent energy conserving features.

#### *Mechanical Systems*

Improving energy efficiency of existing mechanical systems by installing insulation in attics and basements.

#### *Building Site*

Retaining plant materials, trees, and landscape features which perform passive solar energy functions such as sun shading and wind breaks.

#### *Setting (District/Neighborhood)*

Maintaining those existing landscape features which moderate the effects of the climate on the setting such as deciduous trees, evergreen wind-blocks, and lakes or ponds.

### *Not Recommended*

Changing the historic appearance of the building by enclosing porches.

Removing historic interior features which play an energy conserving role.

Replacing existing mechanical systems that could be repaired for continued use.

Removing plant materials, trees, and landscape features that perform passive solar energy functions.

Stripping the setting of landscape features and landforms so that the effects of wind, rain, and sun result in accelerated deterioration of the historic building.

## Preservation

### Accessibility Considerations

#### *Recommended*

Identifying the historic building's character-defining spaces, features, and finishes so that accessibility code-required work will not result in their damage or loss.

Complying with barrier-free access requirements, in such a manner that character-defining spaces, features, and finishes are preserved.

Working with local disability groups, access specialists, and historic preservation specialists to determine the most appropriate solution to access problems.

Providing barrier-free access that promotes independence for the disabled person to the highest degree practicable, while preserving significant historic features.

Finding solutions to meet accessibility requirements that minimize the impact on the historic building and its site, such as compatible ramps, paths, and lifts.

#### *Not Recommended*

Undertaking code-required alterations before identifying those spaces, features, or finishes which are character-defining and must therefore be preserved.

Altering, damaging, or destroying character-defining features in attempting to comply with accessibility requirements.

Making changes to buildings without first seeking expert advice from access specialists and historic preservationists to determine solutions.

Making access modifications that do not provide a reasonable balance between independent, safe access and preservation of historic features.

Making modifications for accessibility without considering the impact on the historic building and its site.

## Preservation

### Health and Safety Considerations

#### *Recommended*

Identifying the historic building's character-defining spaces, features, and finishes so that code-required work will not result in their damage or loss.

Complying with health and safety codes, including seismic code requirements, in such a manner that character-defining spaces, features, and finishes are preserved.

Removing toxic building materials only after thorough testing has been conducted and only after less invasive abatement methods have been shown to be inadequate.

Providing workers with appropriate personal protective equipment for hazards found in the worksite.

Working with local code officials to investigate systems, methods, or devices of equivalent or superior effectiveness and safety to those prescribed by code so that unnecessary alterations can be avoided.

Upgrading historic stairways and elevators to meet health and safety codes in a manner that assures their preservation, i.e., so that they are not damaged or obscured.

Installing sensitively designed fire suppression systems, such as sprinkler systems that result in retention of historic features and finishes.

Applying fire-retardant coatings, such as intumescent paints, which expand during fire to add thermal protection to steel.

Adding a new stairway or elevator to meet health and safety codes in a manner that preserves adjacent character-defining features and spaces.

#### *Not Recommended*

Undertaking code-required alterations to a building or site before identifying those spaces, features, or finishes which are character-defining and must therefore be preserved.

Altering, damaging, or destroying character-defining spaces, features, and finishes while making modifications to a building or site to comply with safety codes.

Destroying historic interior features and finishes without careful testing and without considering less invasive abatement methods.

Removing unhealthful building materials without regard to personal and environmental safety.

Making changes to historic buildings without first exploring equivalent health and safety systems, methods, or devices that may be less damaging to historic spaces, features, and finishes.

Damaging or obscuring historic stairways and elevators or altering adjacent spaces in the process of doing work to meet code requirements.


Covering character-defining wood features with fire-resistant sheathing which results in altering their visual appearance.

Using fire-retardant coatings if they damage or obscure character-defining features.

Radically changing, damaging, or destroying character-defining spaces, features, or finishes when adding a new code-required stairway or elevator.

## Standards for Rehabilitation & Guidelines for Rehabilitating Historic Buildings

*Rehabilitation is defined as the act or process of making possible a compatible use for a property through repair, alterations, and additions while preserving those portions or features which convey its historical, cultural, or architectural values.*

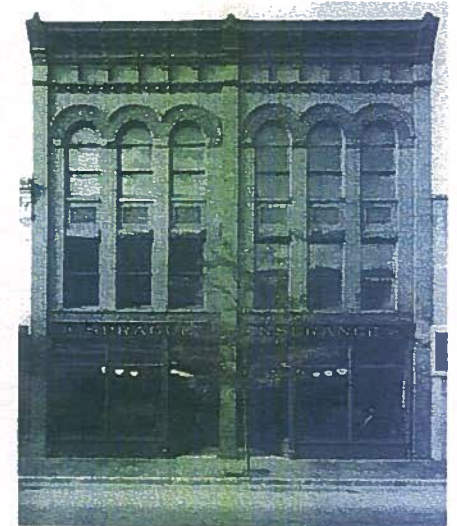

#### Standards for Rehabilitation

1. A property will be used as it was historically or be given a new use that requires minimal change to its distinctive materials, features, spaces, and spatial relationships.
2. The historic character of a property will be retained and preserved. The removal of distinctive materials or alteration of features, spaces, and spatial relationships that characterize a property will be avoided.
3. Each property will be recognized as a physical record of its time, place, and use. Changes that create a false sense of historical development, such as adding conjectural features or elements from other historic properties, will not be undertaken.
4. Changes to a property that have acquired historic significance in their own right will be retained and preserved.
5. Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize a property will be preserved.
6. Deteriorated historic features will be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature will match the old in design, color, texture, and, where possible, materials. Replacement of missing features will be substantiated by documentary and physical evidence.
7. Chemical or physical treatments, if appropriate, will be undertaken using the gentlest means possible. Treatments that cause damage to historic materials will not be used.
8. Archeological resources will be protected and preserved in place. If such resources must be disturbed, mitigation measures will be undertaken.
9. New additions, exterior alterations, or related new construction will not destroy historic materials, features, and spatial relationships that characterize the property. The new work shall be differentiated from the old and will be compatible with the historic materials, features, size, scale and proportion, and massing to protect the integrity of the property and its environment.
10. New additions and adjacent or related new construction will be undertaken in a such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.

#### Guidelines for Rehabilitating Historic Buildings

##### Introduction

In Rehabilitation, historic building materials and character-defining features are protected and maintained as they are in the treatment Preservation; however, an assumption is made prior to work that existing historic fabric has become damaged or deteriorated over time and, as a result, more repair and replacement will be required. Thus, latitude is given in the Standards for Rehabilitation and Guidelines for Rehabilitation to replace extensively deteriorated, damaged, or missing features using either traditional or substitute materials. Of the four treatments, only Rehabilitation includes an opportunity to make possible an efficient contemporary use through alterations and additions.

##### Identify, Retain, and Preserve Historic Materials and Features

Like Preservation, guidance for the treatment Rehabilitation begins with recommendations to identify the form and detailing of those architectural materials and features that are important in defining the building's historic character and which must be retained in order to preserve that character. Therefore, guidance on *identifying, retaining, and preserving* character-defining features is always given first. The character of a historic building may be defined by the form and detailing of exterior materials, such as masonry, wood, and metal; exterior features, such as roofs, porches, and windows; interior

materials, such as plaster and paint; and interior features, such as moldings and stairways, room configuration and spatial relationships, as well as structural and mechanical systems.


##### Protect and Maintain Historic Materials and Features

After identifying those materials and features that are important and must be retained in the process of Rehabilitation work, then *protecting and maintaining* them are addressed. Protection generally involves the least degree of intervention and is preparatory to other work. For example, protection includes the maintenance of historic material through treatments such as rust removal, caulking, limited paint removal, and re-application of protective coatings; the cyclical cleaning of roof gutter systems; or installation of fencing, alarm systems and other temporary protective measures. Although a historic building will usually require more extensive work, an overall evaluation of its physical condition should always begin at this level.

##### Repair Historic Materials and Features

Next, when the physical condition of character-defining materials and features warrants additional work *repairing* is recommended. Rehabilitation guidance for the repair of historic materials such as masonry, wood, and architectural metals again begins with the least degree of intervention possible such as patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading them according to recognized preservation methods. Repairing also includes the limited replacement in kind—or with

Note: The Guidelines for Rehabilitating Historic Buildings in this chapter have already appeared in *The Secretary of the Interior's Standards for Rehabilitation of Historic Landmarks for Rehabilitating Historic Buildings*, published in 1992.

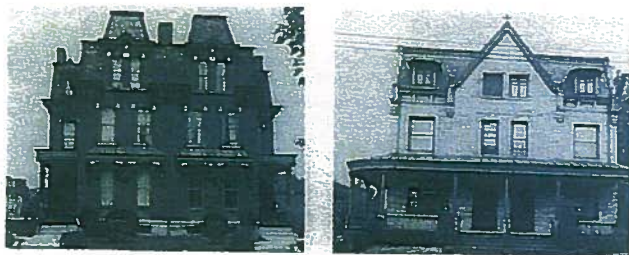

Originally built as single-family, semi-detached duplexes, these houses were rehabilitated for a new use as rental apartments. While some alteration to non-significant interior features and spaces was necessary in each one, the exteriors were essentially preserved. Photos: Mistick, Inc.

compatible substitute material—of extensively deteriorated or missing parts of features when there are surviving prototypes (for example, brackets, dentils, steps, plaster, or portions of slate or tile roofing). Although using the same kind of material is always the preferred option, substitute material is acceptable if the form and design as well as the substitute material itself convey the visual appearance of the remaining parts of the feature and finish.

#### Replace Deteriorated Historic Materials and Features

Following repair in the hierarchy, Rehabilitation guidance is provided for *replacing* an entire character-defining feature with new material because the level of deterioration or damage of materials precludes repair (for example, an exterior cornice; an interior

staircase; or a complete porch or storefront). If the essential form and detailing are still evident so that the physical evidence can be used to re-establish the feature as an integral part of the rehabilitation, then its replacement is appropriate. Like the guidance for repair, the preferred option is always replacement of the entire feature in kind, that is, with the same material. Because this approach may not always be technically or economically feasible, provisions are made to consider the use of a compatible substitute material.

It should be noted that, while the National Park Service guidelines recommend the replacement of an entire character-defining feature that is extensively deteriorated, they never recommend removal and replacement with new material of a feature that—although damaged or deteriorated—could reasonably be repaired and thus preserved.

#### Design for the Replacement of Missing Historic Features

When an entire interior or exterior feature is missing (for example, an entrance, or cast iron facade; or a principal staircase), it no longer plays a role in physically defining the historic character of the building unless it can be accurately recovered in form and detailing through the process of carefully documenting the historical appearance. Although accepting the loss is one possibility, where an important architectural feature is missing, its replacement is always recommended in the Rehabilitation guidelines as the *first* or preferred, course of action. Thus, if adequate historical, pictorial, and physical documentation exists so that the feature may be accurately reproduced, and if it is desirable to re-establish the feature as part of the building's historical appearance, then designing and constructing a new feature based on such information is appropriate. However, a *second* acceptable option for the replacement feature is a new design that is compatible with the remaining character-defining features of the historic building. The new design should always take into account the *size*, *scale*, and *material* of the historic building itself and, most importantly, should be clearly differentiated so that a false historical appearance is not created.

#### Alterations/Additions for the New Use

Some exterior and interior alterations to a historic building are generally needed to assure its continued

use, but it is most important that such alterations do not radically change, obscure, or destroy character-defining spaces, materials, features, or finishes. Alterations may include providing additional parking space on an existing historic building site; cutting new entrances or windows on secondary elevations; inserting an additional floor; installing an entirely new mechanical system; or creating an atrium or light well. Alteration may also include the selective removal of buildings or other features of the environment or building site that are intrusive and therefore detract from the overall historic character.

The construction of an exterior addition on a historic building may seem to be essential for the new use, but it is emphasized in the Rehabilitation guidelines that such new additions should be avoided, if possible, and considered *only* after it is determined that those needs cannot be met by altering secondary, i.e., non character-defining interior spaces. If, after a thorough evaluation of interior solutions, an exterior addition is still judged to be the only viable alternative, it should be designed and constructed to be clearly differentiated from the historic building and so that the character-defining features are not radically changed, obscured, damaged, or destroyed.

Additions and alterations to historic buildings are referenced within specific sections of the Rehabilitation guidelines such as Site, Roofs, Structural Systems, etc., but are addressed in detail in *New Additions to Historic Buildings*, found at the end of this chapter.

#### Energy Efficiency/Accessibility Considerations/Health and Safety Code Considerations

These sections of the guidance address work done to meet accessibility requirements and health and safety code requirements; or retrofitting measures to improve energy efficiency. Although this work is quite often an important aspect of Rehabilitation projects, it is usually not a part of the overall process of protecting or repairing character-defining features; rather, such work is assessed for its potential negative impact on the building's historic character. For this reason, particular care must be taken not to radically change, obscure, damage, or destroy character-defining materials or features in the process of meeting code and energy requirements.

*Rehabilitation as a Treatment* When repair and replacement of deteriorated features are necessary, when alterations or additions to the property are planned for a new or continued use, and when its depiction at a particular time is not appropriate, Rehabilitation may be considered as a treatment. Prior to undertaking work, a documentation plan for Rehabilitation should be developed.

#### Building Exterior

Masonry: Brick, stone, terra cotta, concrete, adobe, stucco and mortar

##### Recommended

*Identifying, retaining, and preserving* masonry features that are important in defining the overall historic character of the building such as walls, brackets, railings, cornices, window architraves, door pediments, steps, and columns; and details such as tooling and bonding patterns, coatings, and color.

*Protecting and maintaining* masonry by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved decorative features.

Cleaning masonry only when necessary to halt deterioration or remove heavy soiling.

Carrying out masonry surface cleaning tests after it has been determined that such cleaning is appropriate. Tests should be observed over a sufficient period of time so that both the immediate and the long range effects are known to enable selection of the gentlest method possible.

##### Not Recommended

Removing or radically changing masonry features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Replacing or rebuilding a major portion of exterior masonry walls that could be repaired so that, as a result, the building is no longer historic and is essentially new construction.

Applying paint or other coatings such as stucco to masonry that has been historically unpainted or uncoated to create a new appearance.

Removing paint from historically painted masonry.

Radically changing the type of paint or coating or its color.

Failing to evaluate and treat the various causes of mortar joint deterioration such as leaking roofs or gutters, differential settlement of the building, capillary action, or extreme weather exposure.

Cleaning masonry surfaces when they are not heavily soiled to create a new appearance, thus needlessly introducing chemicals or moisture into historic materials.

Cleaning masonry surfaces without testing or without sufficient time for the testing results to be of value.

## Rehabilitation

### *Recommended*

Cleaning masonry surfaces with the gentlest method possible, such as low pressure water and detergents, using natural bristle brushes.

Inspecting painted masonry surfaces to determine whether repainting is necessary.

Removing damaged or deteriorated paint only to the next sound layer using the gentlest method possible (e.g., hand-scraping) prior to repainting.

Applying compatible paint coating systems following proper surface preparation.

Repainting with colors that are historically appropriate to the building and district.

Evaluating the overall condition of the masonry to determine whether more than protection and maintenance are required, that is, if repairs to masonry features will be necessary.

*Repairing* masonry walls and other masonry features by repointing the mortar joints where there is evidence of deterioration such as disintegrating mortar, cracks in mortar joints, loose bricks, damp walls, or damaged plasterwork.

Removing deteriorated mortar by carefully hand-raking the joints to avoid damaging the masonry.

### *Not Recommended*

Sandblasting brick or stone surfaces using dry or wet grit or other abrasives. These methods of cleaning permanently erode the surface of the material and accelerate deterioration.

Using a cleaning method that involves water or liquid chemical solutions when there is any possibility of freezing temperatures.

Cleaning with chemical products that will damage masonry, such as using acid on limestone or marble, or leaving chemicals on masonry surfaces.

Applying high pressure water cleaning methods that will damage historic masonry and the mortar joints.

Removing paint that is firmly adhering to, and thus protecting, masonry surfaces.

Using methods of removing paint which are destructive to masonry, such as sandblasting, application of caustic solutions, or high pressure waterblasting.

Failing to follow manufacturers' product and application instructions when repainting masonry.

Using new paint colors that are inappropriate to the historic building and district.

Failing to undertake adequate measures to assure the protection of masonry features.

Removing nondeteriorated mortar from sound joints, then repointing the entire building to achieve a uniform appearance.

Using electric saws and hammers rather than hand tools to remove deteriorated mortar from joints prior to repointing.

## Rehabilitation

### *Recommended*

Duplicating old mortar in strength, composition, color, and texture.

Duplicating old mortar joints in width and in joint profile.

Repairing stucco by removing the damaged material and patching with new stucco that duplicates the old in strength, composition, color, and texture.

Using mud plaster as a surface coating over unfired, unstabilized adobe because the mud plaster will bond to the adobe.

Cutting damaged concrete back to remove the source of deterioration (often corrosion on metal reinforcement bars). The new patch must be applied carefully so it will bond satisfactorily with, and match, the historic concrete.

Repairing masonry features by patching, piecing-in, or consolidating the masonry using recognized preservation methods. Repair may also include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of masonry features when there are surviving prototypes such as terra-cotta brackets or stone balusters.

### *Not Recommended*

Repointing with mortar of high portland cement content (unless it is the content of the historic mortar). This can often create a bond that is stronger than the historic material and can cause damage as a result of the differing coefficient of expansion and the differing porosity of the material and the mortar.

Repointing with a synthetic caulking compound.

Using a "scrub" coating technique to repoint instead of traditional repointing methods.

Changing the width or joint profile when repointing.

Removing sound stucco; or repairing with new stucco that is stronger than the historic material or does not convey the same visual appearance.

Applying cement stucco to unfired, unstabilized adobe. Because the cement stucco will not bond properly, moisture can become entrapped between materials, resulting in accelerated deterioration of the adobe.

Patching concrete without removing the source of deterioration.

Replacing an entire masonry feature such as a cornice or balustrade when repair of the masonry and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the masonry feature or that is physically or chemically incompatible.



## Rehabilitation

### *Recommended*

Applying new or non-historic surface treatments such as water-repellent coatings to masonry only after repointing and only if masonry repairs have failed to arrest water penetration problems.

Replacing in kind an entire masonry feature that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples can include large sections of a wall, a cornice, balustrade, column, or stairway. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

### *Recommended*

#### **Design for the Replacement of Missing Historic Features**

Designing and installing a new masonry feature such as steps or a door pediment when the historic feature is completely missing. It may be an accurate restoration using historical, pictorial, and physical documentation; or be a new design that is compatible with the size, scale, material, and color of the historic building.

### *Not Recommended*

Applying waterproof, water repellent, or non-historic coatings such as stucco to masonry as a substitute for repointing and masonry repairs. Coatings are frequently unnecessary, expensive, and may change the appearance of historic masonry as well as accelerate its deterioration.

Removing a masonry feature that is unrepairable and not replacing it; or replacing it with a new feature that does not convey the same visual appearance.

### *Not Recommended*

Creating a false historical appearance because the replaced masonry feature is based on insufficient historical, pictorial, and physical documentation.

Introducing a new masonry feature that is incompatible in size, scale, material and color.

## Building Exterior

### **Wood: Clapboard, weatherboard, shingles, and other wooden siding and decorative elements**

#### *Recommended*

*Identifying, retaining, and preserving* wood features that are important in defining the overall historic character of the building such as siding, cornices, brackets, window architraves, and doorway pediments; and their paints, finishes, and colors.

*Protecting and maintaining* wood features by providing proper drainage so that water is not allowed to stand on flat, horizontal surfaces or accumulate in decorative features.

Applying chemical preservatives to wood features such as beam ends or outriggers that are exposed to decay hazards and are traditionally unpainted.

Retaining coatings such as paint that help protect the wood from moisture and ultraviolet light. Paint removal should be considered only where there is paint surface deterioration and as part of an overall maintenance program which involves repainting or applying other appropriate protective coatings.

#### *Not Recommended*

Removing or radically changing wood features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Removing a major portion of the historic wood from a facade instead of repairing or replacing only the deteriorated wood, then reconstructing the facade with new material in order to achieve a uniform or "improved" appearance.

Radically changing the type of finish or its color or accent scheme so that the historic character of the exterior is diminished.

Stripping historically painted surfaces to bare wood, then applying clear finishes or stains in order to create a "natural look."

Stripping paint or varnish to bare wood rather than repairing or reapplying a special finish, i.e., a grained finish to an exterior wood feature such as a front door.

Failing to identify, evaluate, and treat the causes of wood deterioration, including faulty flashing, leaking gutters, cracks and holes in siding, deteriorated caulking in joints and seams, plant material growing too close to wood surfaces, or insect or fungus infestation.

Using chemical preservatives such as creosote which, unless they were used historically, can change the appearance of wood features.

Stripping paint or other coatings to reveal bare wood, thus exposing historically coated surfaces to the effects of accelerated weathering.

## Rehabilitation

## Rehabilitation

### Recommended

Inspecting painted wood surfaces to determine whether repainting is necessary or if cleaning is all that is required.

Removing damaged or deteriorated paint to the next sound layer using the gentlest method possible (handscraping and handsanding), then repainting.

Using with care electric hot-air guns on decorative wood features and electric heat plates on flat wood surfaces when paint is so deteriorated that total removal is necessary prior to repainting.




According to the *Standards for Rehabilitation*, existing historic materials should be protected, maintained and repaired. In an exemplary project, the windows and shutters of this historic residence were carefully preserved.

### Not Recommended

Removing paint that is firmly adhering to, and thus, protecting wood surfaces.

Using destructive paint removal methods such as propane or butane torches, sandblasting or waterblasting. These methods can irreversibly damage historic woodwork.

Using thermal devices improperly so that the historic woodwork is scorched.

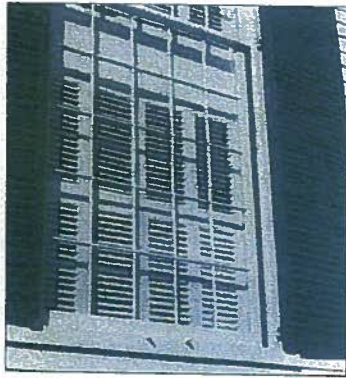

### Recommended

Using chemical strippers primarily to supplement other methods such as handscraping, handsanding and the above-recommended thermal devices. Detachable wooden elements such as shutters, doors, and columns may—with the proper safeguards—be chemically dip-stripped.

Applying compatible paint coating systems following proper surface preparation.

Repainting with colors that are appropriate to the historic building and district.

Evaluating the overall condition of the wood to determine whether more than protection and maintenance are required, that is, if repairs to wood features will be necessary.

Repairing wood features by patching, piecing-in, consolidating, or otherwise reinforcing the wood using recognized preservation methods. Repair may also include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of features where there are surviving prototypes such as brackets, molding, or sections of siding.

Replacing in kind an entire wood feature that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples of wood features include a cornice, entablature or balustrade. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

## Rehabilitation

### Not Recommended

Failing to neutralize the wood thoroughly after using chemicals so that new paint does not adhere.

Allowing detachable wood features to soak too long in a caustic solution so that the wood grain is raised and the surface roughened.

Failing to follow manufacturers' product and application instructions when repainting exterior woodwork.

Using new colors that are inappropriate to the historic building or district.

Failing to undertake adequate measures to assure the protection of wood features.

Replacing an entire wood feature such as a cornice or wall when repair of the wood and limited replacement of deteriorated or missing parts are appropriate.

Using substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the wood feature or that is physically or chemically incompatible.

Removing an entire wood feature that is unrepairable and not replacing it; or replacing it with a new feature that does not convey the same visual appearance.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

#### *Recommended*

##### **Design for the Replacement of Missing Historic Features**

Designing and installing a new wood feature such as a cornice or doorway when the historic feature is completely missing. It may be an accurate restoration using historical, pictorial, and physical documentation; or be a new design that is compatible with the size, scale, material, and color of the historic building.

#### *Not Recommended*

Creating a false historical appearance because the replaced wood feature is based on insufficient historical, pictorial, and physical documentation.

Introducing a new wood feature that is incompatible in size, scale, material and color.

### **Building Exterior**

**Architectural Metals:** Cast iron, steel, pressed tin, copper, aluminum, and zinc

#### *Recommended*

*Identifying, retaining, and preserving* architectural metal features such as columns, capitals, window hoods, or stairways that are important in defining the overall historic character of the building; and their finishes and colors. Identification is also critical to differentiate between metals prior to work. Each metal has unique properties and thus requires different treatments.

*Protecting and maintaining* architectural metals from corrosion by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved, decorative features.

Cleaning architectural metals, when appropriate, to remove corrosion prior to repainting or applying other appropriate protective coatings.

Identifying the particular type of metal prior to any cleaning procedure and then testing to assure that the gentlest cleaning method possible is selected or determining that cleaning is inappropriate for the particular metal.

#### *Not Recommended*

Removing or radically changing architectural metal features which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Removing a major portion of the historic architectural metal from a facade instead of repairing or replacing only the deteriorated metal, then reconstructing the facade with new material in order to create a uniform, or "improved" appearance.

Radically changing the type of finish or its historic color or accent scheme.

Failing to identify, evaluate, and treat the causes of corrosion, such as moisture from leaking roofs or gutters.

Placing incompatible metals together without providing a reliable separation material. Such incompatibility can result in galvanic corrosion of the less noble metal, e.g., copper will corrode cast iron, steel, tin, and aluminum.

Exposing metals which were intended to be protected from the environment.

Applying paint or other coatings to metals such as copper, bronze, or stainless steel that were meant to be exposed.

Using cleaning methods which alter or damage the historic color, texture, and finish of the metal; or cleaning when it is inappropriate for the metal.

Removing the patina of historic metal. The patina may be a protective coating on some metals, such as bronze or copper, as well as a significant historic finish.

## Rehabilitation

### Recommended

Cleaning soft metals such as lead, tin, copper, terneplate, and zinc with appropriate chemical methods because their finishes can be easily abraded by blasting methods.

Using the gentlest cleaning methods for cast iron, wrought iron, and steel—hard metals—in order to remove paint buildup and corrosion. If handscrapping and wire brushing have proven ineffective, low pressure grit blasting may be used as long as it does not abrade or damage the surface.

Applying appropriate paint or other coating systems after cleaning in order to decrease the corrosion rate of metals or alloys.

Repainting with colors that are appropriate to the historic building or district.

Applying an appropriate protective coating such as lacquer to an architectural metal feature such as a bronze door which is subject to heavy pedestrian use.

Evaluating the overall condition of the architectural metals to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

*Repairing* architectural metal features by patching, splicing, or otherwise reinforcing the metal following recognized preservation methods. Repairs may also include the limited replacement in kind—or with a compatible substitute material—of those extensively deteriorated or missing parts of features when there are surviving prototypes such as porch balusters, column capitals or bases; or porch cresting.

### Not Recommended

Cleaning soft metals such as lead, tin, copper, terneplate, and zinc with grit blasting which will abrade the surface of the metal.

Failing to employ gentler methods prior to abrasively cleaning cast iron, wrought iron or steel; or using high pressure grit blasting.

Failing to re-apply protective coating systems to metals or alloys that require them after cleaning so that accelerated corrosion occurs.

Using new colors that are inappropriate to the historic building or district.

Failing to assess pedestrian use or new access patterns so that architectural metal features are subject to damage by use or inappropriate maintenance such as salting adjacent sidewalks.

Failing to undertake adequate measures to assure the protection of architectural metal features.

Replacing an entire architectural metal feature such as a column or a balustrade when repair of the metal and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the architectural metal feature or that is physically or chemically incompatible.

## Rehabilitation

### Recommended

*Replacing* in kind an entire architectural metal feature that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples could include cast iron porch steps or steel sash windows. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

### Not Recommended

Removing an architectural metal feature that is unrepairable and not replacing it; or replacing it with a new architectural metal feature that does not convey the same visual appearance.

### Recommended

#### Design for the Replacement of Missing Historic Features

Designing and installing a new architectural metal feature such as a metal cornice or cast iron capital when the historic feature is completely missing. It may be an accurate restoration using historical, pictorial, and physical documentation; or be a new design that is compatible with the size, scale, material, and color of the historic building.

### Not Recommended

Creating a false historical appearance because the replaced architectural metal feature is based on insufficient historical, pictorial, and physical documentation.

Introducing a new architectural metal feature that is incompatible in size, scale, material, and color.

## Building Exterior

## Roofs

*Recommended*

*Identifying, retaining, and preserving* roofs—and their functional and decorative features—that are important in defining the overall historic character of the building. This includes the roof's shape, such as hipped, gambrel, and mansard; decorative features such as cupolas, cresting chimneys, and weathervanes; and roofing material such as slate, wood, clay tile, and metal, as well as its size, color, and patterning.

*Protecting and maintaining* a roof by cleaning the gutters and downspouts and replacing deteriorated flashing. Roof sheathing should also be checked for proper venting to prevent moisture condensation and water penetration; and to ensure that materials are free from insect infestation.

Providing adequate anchorage for roofing material to guard against wind damage and moisture penetration.

Protecting a leaking roof with plywood and building paper until it can be properly repaired.

*Not Recommended*

Radically changing, damaging, or destroying roofs which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Removing a major portion of the roof or roofing material that is repairable, then reconstructing it with new material in order to create a uniform, or "improved" appearance.

Changing the configuration of a roof by adding new features such as dormer windows, vents, or skylights so that the historic character is diminished.

Stripping the roof of sound historic material such as slate, clay tile, wood, and architectural metal.

Applying paint or other coatings to roofing material which has been historically uncoated.

Failing to clean and maintain gutters and downspouts properly so that water and debris collect and cause damage to roof fasteners, sheathing, and the underlying structure.

Allowing roof fasteners, such as nails and clips to corrode so that roofing material is subject to accelerated deterioration.

Permitting a leaking roof to remain unprotected so that accelerated deterioration of historic building materials—masonry, wood, plaster, paint and structural members—occurs.

*Recommended*

*Repairing* a roof by reinforcing the historic materials which comprise roof features. Repairs will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of features when there are surviving prototypes such as cupola louvers, dentils, dormer roofing: or slates, tiles, or wood shingles on a main roof.

*Replacing* in kind an entire feature of the roof that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples can include a large section of roofing, or a dormer or chimney. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

*Not Recommended*

Replacing an entire roof feature such as a cupola or dormer when repair of the historic materials and limited replacement of deteriorated or missing parts are appropriate.

Failing to reuse intact slate or tile when only the roofing substrate needs replacement.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the roof or that is physically or chemically incompatible.

Removing a feature of the roof that is unrepairable, such as a chimney or dormer, and not replacing it; or replacing it with a new feature that does not convey the same visual appearance.

## Rehabilitation

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

### Recommended

#### Design for the Replacement of Missing Historic Features

Designing and constructing a new feature when the historic feature is completely missing, such as chimney or cupola. It may be an accurate reproduction using historical, pictorial, and physical documentation; or be a new design that is compatible with the size, scale, material, and color of the historic building.

#### Alterations/Additions for the New Use

Installing mechanical and service equipment on the roof such as air conditioning, transformers, or solar collectors when required for the new use so that they are inconspicuous from the public right-of-way and do not damage or obscure character-defining features.

Designing additions to roofs such as residential, office, or storage spaces; elevator housings; decks and terraces; or dormers or skylights when required by the new use so that they are inconspicuous from the public right-of-way and do not damage or obscure character-defining features.

### Not Recommended

Creating a false historical appearance because the replaced feature is based on insufficient historical, pictorial, and physical documentation.

Introducing a new roof feature that is incompatible in size, scale, material and color.

Installing mechanical or service equipment in that it damages or obscures character-defining features; or is conspicuous from the public right-of-way.

Radically changing a character-defining roof slope or damaging or destroying character-defining roofing material as a result of incompatible design or improper installation techniques.

## Rehabilitation

### Building Exterior

#### Windows

##### Recommended

*Identifying, retaining, and preserving windows*—and their functional and decorative features—that are important in defining the overall historic character of the building. Such features can include frames, sash, muntins, glazing, sills, heads, hoodmolds, paneled or decorated jambs and moldings, and interior and exterior shutters and blinds.

Conducting an in-depth survey of the condition of existing windows early in rehabilitation planning so that repair and upgrading methods and possible replacement options can be fully explored.

*Protecting and maintaining* the wood and architectural metals which comprise the window frame, sash, muntins, and surrounds through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Making windows weathertight by re-caulking and replacing or installing weatherstripping. These actions also improve thermal efficiency.

##### Not Recommended

Removing or radically changing windows which are important in defining the historic character of the building so that, as a result, the character is diminished.

Changing the number, location, size or glazing pattern of windows, through cutting new openings, blocking-in windows, and installing replacement sash that do not fit the historic window opening.

Changing the historic appearance of windows through the use of inappropriate designs, materials, finishes, or colors which noticeably change the sash, depth of reveal, and muntin configuration; the reflectivity and color of the glazing; or the appearance of the frame.

Obscuring historic window trim with metal or other material.

Stripping windows of historic material such as wood, cast iron, and bronze.

Replacing windows solely because of peeling paint, broken glass, stuck sash, and high air infiltration. These conditions, in themselves, are no indication that windows are beyond repair.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of the window results.

Retrofitting or replacing windows rather than maintaining the sash, frame, and glazing.

## Rehabilitation

### Recommended

Evaluating the overall condition of materials to determine whether more than protection and maintenance are required, i.e. if repairs to windows and window features will be required.

*Repairing* window frames and sash by patching, splicing, consolidating or otherwise reinforcing. Such repair may also include replacement in kind—or with compatible substitute material—of those parts that are either extensively deteriorated or are missing when there are surviving prototypes such as architraves, hoodmolds, sash, sills, and interior or exterior shutters and blinds.

*Replacing* in kind an entire window that is too deteriorated to repair using the same sash and pane configuration and other design details. If using the same kind of material is not technically or economically feasible when replacing windows deteriorated beyond repair, then a comparable substitute material may be considered.

### Not Recommended

Failing to undertake adequate measures to assure the protection of historic windows.

Replacing an entire window when repair of materials and limited replacement of deteriorated or missing parts are appropriate.

Failing to reuse serviceable window hardware such as brass sash lifts and sash locks.

Using substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the window or that is physically or chemically incompatible.

Removing a character-defining window that is unrepairable and blocking it in; or replacing it with a new window that does not convey the same visual appearance.

## Rehabilitation

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

### Recommended

#### Design for the Replacement of Missing Historic Features

Designing and installing new windows when the historic windows (frames, sash and glazing) are completely missing. The replacement windows may be an accurate restoration using historical, pictorial, and physical documentation; or be a new design that is compatible with the window openings and the historic character of the building.

#### Alterations/Additions for the New Use

Designing and installing additional windows on rear or other non-character-defining elevations if required by the new use. New window openings may also be cut into exposed party walls. Such design should be compatible with the overall design of the building, but not duplicate the fenestration pattern and detailing of a character-defining elevation.

Providing a setback in the design of dropped ceilings when they are required for the new use to allow for the full height of the window openings.

### Not Recommended

Creating a false historical appearance because the replaced window is based on insufficient historical, pictorial, and physical documentation.


Introducing a new design that is incompatible with the historic character of the building.

Installing new windows, including frames, sash, and muntin configuration that are incompatible with the building's historic appearance or obscure, damage, or destroy character-defining features.

Inserting new floors or furred-down ceilings which cut across the glazed areas of windows so that the exterior form and appearance of the windows are changed.



## Rehabilitation

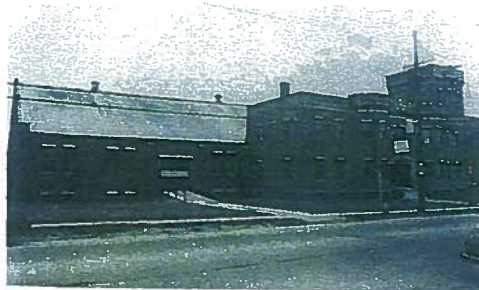

(a) An armory complex was rehabilitated for rental housing. (b) This view of the rear elevation shows the paired, nine-over-nine wood oak windows and high sills that characterized the building. (c) After inappropriate rehabilitation work, the same rear elevation is shown with new skylights added to the roof, prefabricated panels filling the former brick areas, and new wood decks and privacy fences. Because the work changed the historic character, the project did not meet the Standards.



84 Building Exterior Windows

## Building Exterior

### Entrances and Porches

#### Recommended

*Identifying, retaining, and preserving* entrances and porches—and their functional and decorative features—that are important in defining the overall historic character of the building such as doors, fanlights, sidelights, pilaster, entablatures, columns, balustrades, and stairs.

*Protecting and maintaining* the masonry, wood, and architectural metals that comprise entrances and porches through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Evaluating the overall condition of materials to determine whether more than protection and maintenance are required, that is, repairs to entrance and porch features will be necessary.

*Repairing* entrances and porches by reinforcing the historic materials. Repair will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of repeated features where there are surviving prototypes such as balustrades, cornices, entablatures, columns, sidelights, and stairs.

#### Not Recommended

Removing or radically changing entrances and porches which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Stripping entrances and porches of historic material such as wood, cast iron, terra cotta tile, and brick.

Removing an entrance or porch because the building has been re-oriented to accommodate a new use.

Cutting new entrances on a primary elevation.

Altering utilitarian or service entrances so they appear to be formal entrances by adding paneled doors, fanlights, and sidelights.

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of entrances and porches results.

Failing to undertake adequate measures to assure the protection of historic entrances and porches.

Replacing an entire entrance or porch when the repair of materials and limited replacement of parts are appropriate.

Using a substitute material for the replacement parts that does not convey the visual appearance of the surviving parts of the entrance and porch or that is physically or chemically incompatible.

## Rehabilitation

## Rehabilitation



*In Rehabilitation, deteriorated features should be repaired, whenever possible, and replaced when the severity of the damage makes it necessary. Here, a two-story porch is seen prior to treatment (left). The floor boards are rotted out and the columns are in a state of collapse, supported only by crude, temporary shafis. Other components are in varying stages of decay. Appropriate work on the historic porch (right) included repairs to the porch rails; and total replacement of the extensively deteriorated columns and floor boards. Some dismantling of the porch was necessary.*

## Rehabilitation

### Recommended

Replacing in kind an entire entrance or porch that is too deteriorated to repair—if the form and detailing are still evident—using the physical evidence as a model to reproduce the feature. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

### Recommended

#### Design for the Replacement of Missing Historic Features

Designing and constructing a new entrance or porch when the historic entrance or porch is completely missing. It may be a restoration based on historical, pictorial, and physical documentation; or be a new design that is compatible with the historic character building.

#### Alterations/Additions for the New Use

Designing enclosures for historic porches on secondary elevations when required by the new use in a manner that preserves the historic character of the building. This can include using large sheets of glass and recessing the enclosure wall behind existing scrollwork, posts, and balustrades.

Designing and installing additional entrances or porches on secondary elevations when required for the new use in a manner that preserves the historic character of the building, i.e., limiting such alteration to non-character-defining elevations.

### Not Recommended

Removing an entrance or porch that is unrepairable and not replacing it; or replacing it with a new entrance or porch that does not convey the same visual appearance.

### Not Recommended

Creating a false historical appearance because the replaced entrance or porch is based on insufficient historical, pictorial, and physical documentation.

Introducing a new entrance or porch that is incompatible in size, scale, material, and color.

Enclosing porches in a manner that results in a diminution or loss of historic character by using materials such as wood, stucco, or masonry.

Installing secondary service entrances and porches that are incompatible in size and scale with the historic building or obscure, damage, or destroy character-defining features.

**Building Exterior****Storefronts***Recommended*

Identifying, retaining, and preserving storefronts—and their functional and decorative features—that are important in defining the overall historic character of the building such as display windows, signs, doors, transoms, kick plates, corner posts, and entablatures. The removal of inappropriate, non-historic cladding, false mansard roofs, and other later alterations can help reveal the historic character of a storefront.

*Protecting and maintaining* masonry, wood, and architectural metals which comprise storefronts through appropriate treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

Protecting storefronts against arson and vandalism before work begins by boarding up windows and installing alarm systems that are keyed into local protection agencies.

Evaluating the existing condition of storefront materials to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

*Not Recommended*

Removing or radically changing storefronts—and their features—which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Changing the storefront so that it appears residential rather than commercial in character.

Removing historic material from the storefront to create a recessed arcade.

Introducing coach lanterns, mansard designs, wood shakes, nonoperable shutters, and small-paned windows if they cannot be documented historically.

Changing the location of a storefront's main entrance.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of storefront features results.

Permitting entry into the building through unsecured or broken windows and doors so that interior features and finishes are damaged by exposure to weather or vandalism.

Stripping storefronts of historic material such as wood, cast iron, terra cotta, carriage glass, and brick.

Failing to undertake adequate measures to assure the preservation of the historic storefront.

*Recommended*

*Repairing* storefronts by reinforcing the historic materials. Repairs will also generally include the limited replacement in kind—or with compatible substitute materials—of those extensively deteriorated or missing parts of storefronts where there are surviving prototypes such as transoms, kick plates, pilasters, or signs.

*Replacing* in kind an entire storefront that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model. If using the same material is not technically or economically feasible, then compatible substitute materials may be considered.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

*Recommended***Design for the Replacement of Missing Historic Features**

Designing and constructing a new storefront when the historic storefront is completely missing. It may be an accurate restoration using historical, pictorial, and physical documentation; or be a new design that is compatible with the size, scale, material, and color of the historic building.

*Not Recommended*

Replacing an entire storefront when repair of materials and limited replacement of its parts are appropriate.

Using substitute material for the replacement parts that does not convey the same visual appearance as the surviving parts of the storefront or that is physically or chemically incompatible.

Removing a storefront that is unrepairable and not replacing it; or replacing it with a new storefront that does not convey the same visual appearance.

*Not Recommended*


Creating a false historical appearance because the replaced storefront is based on insufficient historical, pictorial, and physical documentation.

Introducing a new design that is incompatible in size, scale, material, and color.

Using inappropriately scaled signs and logos or other types of signs that obscure, damage, or destroy remaining character-defining features of the historic building.



## Rehabilitation

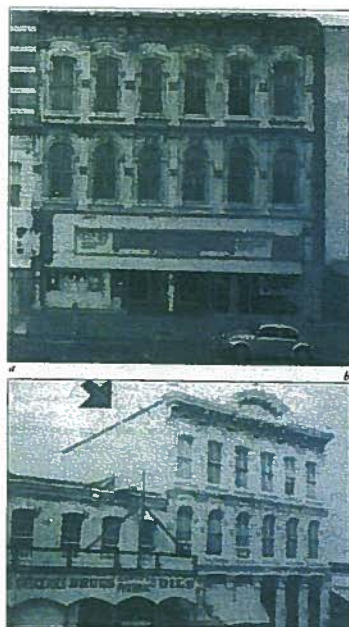

*In the treatment, Rehabilitation, one option for replacing missing historic features is to use pictorial documentation and/or physical evidence to re-create the historic feature. (a) In this example, the ornamental cornice of an 1866 limestone building was missing, and the ground level storefront had been extensively altered. (b) and (c) Based on the availability of photographic and other documentation, the owners were able to accurately restore the cornice and storefront to their historic configuration. A substitute material, fiberglass, was used to fabricate the missing pressed metal cornice, an acceptable alternative in this project. All work met the Standards.*

## Building Interior Structural Systems

### Recommended

*Identifying, retaining, and preserving* structural systems—and individual features of systems—that are important in defining the overall historic character of the building, such as post and beam systems, trusses, summer beams, vigas, cast iron columns, above-grade stone foundation walls, or load-bearing brick or stone walls.

*Protecting and maintaining* the structural system by cleaning the roof gutters and downspouts; replacing roof flashing; keeping masonry, wood, and architectural metals in a sound condition; and ensuring that structural members are free from insect infestation.

Examining and evaluating the physical condition of the structural system and its individual features using non-destructive techniques such as X-ray photography.

## Rehabilitation

### Not Recommended

Removing, covering, or radically changing visible features of structural systems which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Putting a new use into the building which could overload the existing structural system; or installing equipment or mechanical systems which could damage the structure.

Demolishing a loadbearing masonry wall that could be augmented and retained, and replacing it with a new wall (i.e., brick or stone), using the historic masonry only as an exterior veneer.

Leaving known structural problems untreated such as deflection of beams, cracking and bowing of walls, or racking of structural members.

Utilizing treatments or products that accelerate the deterioration of structural material such as introducing urea-formaldehyde foam insulation into frame walls.

Failing to provide proper building maintenance so that deterioration of the structural system results. Causes of deterioration include subsurface ground movement, vegetation growing too close to foundation walls, improper grading, fungal rot, and poor interior ventilation that results in condensation.

Utilizing destructive probing techniques that will damage or destroy structural material.

## Rehabilitation

### Recommended

*Repairing* the structural system by augmenting or upgrading individual parts or features. For example, weakened structural members such as floor framing can be paired with a new member, braced, or otherwise supplemented and reinforced.

*Replacing* in kind—or with substitute material—those portions or features of the structural system that are either extensively deteriorated or are missing when there are surviving prototypes such as cast iron columns, roof rafters or trusses, or sections of loadbearing walls. Substitute material should convey the same form, design, and overall visual appearance as the historic feature; and, at a minimum, be equal to its loadbearing capabilities.

### Not Recommended

Upgrading the building structurally in a manner that diminishes the historic character of the exterior, such as installing strapping channels or removing a decorative cornice; or damages interior features or spaces.

Replacing a structural member or other feature of the structural system when it could be augmented and retained.

Installing a visible replacement feature that does not convey the same visual appearance, e.g., replacing an exposed wood summer beam with a steel beam.

Using substitute material that does not equal the loadbearing capabilities of the historic material and design or is otherwise physically or chemically incompatible.

## Rehabilitation

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

Recommended	Not Recommended
<b>Alterations/Additions for the New Use</b>	
Limiting any new excavations adjacent to historic foundations to avoid undermining the structural stability of the building or adjacent historic buildings. Studies should be done to ascertain potential damage to archeological resources.	Carrying out excavations or regrading adjacent to or within a historic building which could cause the historic foundation to settle, shift, or fail; could have a similar effect on adjacent historic buildings; or could destroy significant archeological resources.
Correcting structural deficiencies in preparation for the new use in a manner that preserves the structural system and individual character-defining features.	Radically changing interior spaces or damaging or destroying features or finishes that are character-defining while trying to correct structural deficiencies in preparation for the new use.
Designing and installing new mechanical or electrical systems when required for the new use which minimize the number of cutouts or holes in structural members.	Installing new mechanical and electrical systems or equipment in a manner which results in numerous cuts, splices, or alterations to the structural members.
Adding a new floor when required for the new use if such an alteration does not damage or destroy the structural system or obscure, damage, or destroy character-defining spaces, features, or finishes.	Inserting a new floor when such a radical change damages a structural system or obscures or destroys interior spaces, features, or finishes.
Creating an atrium or a light well to provide natural light when required for the new use in a manner that ensures the preservation of the structural system as well as character-defining interior spaces, features, and finishes.	Inserting new floors or hurred-down ceilings which cut across the glazed areas of windows so that the exterior form and appearance of the windows are radically changed.
	Damaging the structural system or individual features, or radically changing, damaging, or destroying character-defining interior spaces, features, or finishes in order to create an atrium or a light well.

**Building Interior****Spaces, Features, and Finishes***Recommended***Interior Spaces**

*Identifying, retaining, and preserving* a floor plan or interior spaces that are important in defining the overall historic character of the building. This includes the size, configuration, proportion, and relationship of rooms and corridors; the relationship of features to spaces; and the spaces themselves such as lobbies, reception halls, entrance halls, double parlors, theaters, auditoriums, and important industrial or commercial spaces.

**Interior Features and Finishes**

*Identifying, retaining, and preserving* interior features and finishes that are important in defining the overall historic character of the building, including columns, cornices, baseboards, fireplaces and mantels, panelling, light fixtures, hardware, and flooring; and wallpaper, plaster, paint, and finishes such as stencilling, marbling, and graining; and other decorative materials that accent interior features and provide color, texture, and patterning to walls, floors, and ceilings.

*Not Recommended*

Radically changing a floor plan or interior spaces—including individual rooms—which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Altering the floor plan by demolishing principal walls and partitions to create a new appearance.

Altering or destroying interior spaces by inserting floors, cutting through floors, lowering ceilings, or adding or removing walls.

Relocating an interior feature such as a staircase so that the historic relationship between features and spaces is altered.

Removing or radically changing features and finishes which are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Installing new decorative material that obscures or damages character-defining interior features or finishes.

Removing paint, plaster, or other finishes from historically finished surfaces to create a new appearance (e.g., removing plaster to expose masonry surfaces such as brick walls or a chimney piece).

Applying paint, plaster, or other finishes to surfaces that have been historically unfinished to create a new appearance.

Stripping paint to bare wood rather than repairing or reapplying grained or marbled finishes to features such as doors and panelling.

Radically changing the type of finish or its color, such as painting a previously varnished wood feature.

*Recommended*

*Protecting and maintaining* masonry, wood, and architectural metals which comprise interior features through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

Protecting interior features and finishes against arson and vandalism before project work begins, erecting protective fencing, boarding-up windows, and installing fire alarm systems that are keyed to local protection agencies.

Protecting interior features such as a staircase, mantel, or decorative finishes and wall coverings against damage during project work by covering them with heavy canvas or plastic sheets.


*Not Recommended*

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of interior features results.

Permitting entry into historic buildings through unsecured or broken windows and doors so that the interior features and finishes are damaged by exposure to weather or vandalism.

Stripping interiors of features such as woodwork, doors, windows, light fixtures, copper piping, radiators, or of decorative materials.

Failing to provide proper protection of interior features and finishes during work so that they are gouged, scratched, dented, or otherwise damaged.

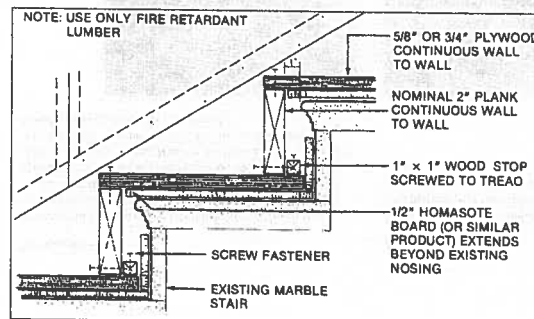

*Historic features that characterize a building should always be protected from damage during rehabilitation work. The drawing shows how a resilient, temporary stair covering was applied over the existing marble staircase. Drawing: National Park Service staff, based on material originally prepared by Emery Roth and Sons, P.C.*

## Rehabilitation

### Recommended

Installing protective coverings in areas of heavy pedestrian traffic to protect historic features such as wall coverings, parquet flooring and panelling.

Removing damaged or deteriorated paints and finishes to the next sound layer using the gentlest method possible, then repainting or refinishing using compatible paint or other coating systems.

Repainting with colors that are appropriate to the historic building.

Limiting abrasive cleaning methods to certain industrial warehouse buildings where the interior masonry or plaster features do not have distinguishing design, detailing, tooling, or finishes; and where wood features are not finished, molded, beaded, or worked by hand. Abrasive cleaning should only be considered after other, gentler methods have been proven ineffective.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, that is, if repairs to interior features and finishes will be necessary.

Repairing interior features and finishes by reinforcing the historic materials. Repair will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of repeated features when there are surviving prototypes such as stairs, balustrades, wood panelling, columns; or decorative wall coverings or ornamental tin or plaster ceilings.

### Not Recommended

Failing to take new use patterns into consideration so that interior features and finishes are damaged.

Using destructive methods such as propane or butane torches or sandblasting to remove paint or other coatings. These methods can irreversibly damage the historic materials that comprise interior features.

Using new paint colors that are inappropriate to the historic building.

Changing the texture and patina of character-defining features through sandblasting or use of abrasive methods to remove paint, discoloration or plaster. This includes both exposed wood (including structural members) and masonry.

Failing to undertake adequate measures to assure the protection of interior features and finishes.

Replacing an entire interior feature such as a staircase, panelled wall, parquet floor, or cornice; or finish such as a decorative wall covering or ceiling when repair of materials and limited replacement of such parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts or portions of the interior feature or finish or that is physically or chemically incompatible.

## Rehabilitation

### Recommended

Replacing in kind an entire interior feature or finish that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model for reproduction. Examples could include wainscoting, a tin ceiling, or interior stairs. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

### Not Recommended

Removing a character-defining feature or finish that is unrepairable and not replacing it; or replacing it with a new feature or finish that does not convey the same visual appearance.



Rehabilitating historic dwelling units often includes some level of lead-paint hazard abatement. Whenever lead-based paint begins to peel, chip, crack, or otherwise comes loose (a), it should be removed in a manner that protects the worker as well as the immediate environment. In this example (b), the deteriorating lead-paint was removed throughout the apartment building and a compatible primer and finish paint applied. Photos: Sharon C. Park, AIA.



*The following work is highlighted to indicate that it represents the particularly complex technical or design aspect of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

#### *Recommended*

##### **Design for the Replacement of Missing Historic Features**

Designing and installing a new interior feature or finish if the historic feature or finish is completely missing. This could include missing partitions, stairs, elevators, lighting fixtures, and wall coverings, or even entire rooms if all historic spaces, features, and finishes are missing or have been destroyed by inappropriate "renovations." The design may be a recreation based on historical, pictorial, and physical documentation; or be a new design that is compatible with the historic character of the building, district, or neighborhood.

##### **Alterations/Additions for the New Use**

Accommodating service functions such as bathrooms, mechanical equipment, and office machines required by the building's new use in secondary spaces such as first floor service areas or on upper floors.

Reusing decorative material or features that have had to be removed during the rehabilitation work including wall and baseboard trim, door molding, paneled doors, and simple wainscoting; and relocating such material or features in areas appropriate to their historic placement.

Installing permanent partitions in secondary spaces; removable partitions that do not destroy the sense of space should be installed when the new use requires the subdivision of character-defining interior space.

Enclosing an interior stairway where required by code so that its character is retained. In many cases, glazed fire-rated walls may be used.

#### *Not Recommended*

Creating a false historical appearance because the replaced feature is based on insufficient physical, historical, and pictorial documentation or on information derived from another building.

Introducing a new interior feature or finish that is incompatible with the scale, design, materials, color, and texture of the surviving interior features and finishes.

Dividing rooms, lowering ceilings, and damaging or obscuring character-defining features such as fireplaces, niches, stairways or alcoves, so that a new use can be accommodated in the building.

Discarding historic material when it can be reused within the rehabilitation project or relocating it in historically inappropriate areas.

Installing permanent partitions that damage or obscure character-defining spaces, features, or finishes.

Enclosing an interior stairway with fire-rated construction so that the stairwell space or any character-defining features are destroyed.

#### *Recommended*

Placing new code-required stairways or elevators in secondary and service areas of the historic building.

Creating an atrium or a light well to provide natural light when required for the new use in a manner that preserves character-defining interior spaces, features, and finishes as well as the structural system.

Adding a new floor if required for the new use in a manner that preserves character-defining structural features, and interior spaces, features, and finishes.

#### *Not Recommended*

Radically changing, damaging, or destroying character-defining spaces, features, or finishes when adding new code-required stairways and elevators.

Destroying character-defining interior spaces, features, or finishes; or damaging the structural system in order to create an atrium or light well.

Inserting a new floor within a building that alters or destroys the fenestration; radically changes a character-defining interior space; or obscures, damages, or destroys decorative detailing.

**Building Interior****Mechanical Systems: Heating, Air Conditioning, Electrical, and Plumbing***Recommended*

*Identifying, retaining, and preserving* visible features of early mechanical systems that are important in defining the overall historic character of the building, such as radiators, vents, fans, grilles, plumbing fixtures, switchplates, and lights.

*Protecting and maintaining* mechanical, plumbing, and electrical systems and their features through cyclical cleaning and other appropriate measures.

Preventing accelerated deterioration of mechanical systems by providing adequate ventilation of attics, crawlspaces, and cellars so that moisture problems are avoided.

Improving the energy efficiency of existing mechanical systems to help reduce the need for elaborate new equipment. Consideration should be given to installing storm windows, insulating attic crawl space, or adding awnings, if appropriate.

*Repairing* mechanical systems by augmenting or upgrading system parts, such as installing new pipes and ducts; rewiring; or adding new compressors or boilers.

*Replacing* in kind—or with compatible substitute material—those visible features of mechanical systems that are either extensively deteriorated or are prototypes such as ceiling fans, switchplates, radiators, grilles, or plumbing fixtures.

*Not Recommended*

Removing or radically changing features of mechanical systems that are important in defining the overall historic character of the building so that, as a result, the character is diminished.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of mechanical systems and their visible features results.

Enclosing mechanical systems in areas that are not adequately ventilated so that deterioration of the systems results.

Installing unnecessary air conditioning or climate control systems which can add excessive moisture to the building. This additional moisture can either condense inside, damaging interior surfaces, or pass through interior walls to the exterior, potentially damaging adjacent materials as it migrates.

Replacing a mechanical system or its functional parts when it could be upgraded and retained.

Installing a visible replacement feature that does not convey the same visual appearance.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

*Recommended***Alterations/Additions for the New Use**

Installing a completely new mechanical system if required for the new use so that it causes the least alteration possible to the building's floor plan, the exterior elevations, and the least damage to the historic building material.

Providing adequate structural support for new mechanical equipment.

Installing the vertical runs of ducts, pipes, and cables in closets, service rooms, and wall cavities.

Installing air conditioning units if required by the new use in such a manner that historic features are not damaged or obscured and excessive moisture is not generated that will accelerate deterioration of historic materials.

Installing heating/air conditioning units in the window frames in such a manner that the sash and frames are protected. Window installations should be considered only when all other viable heating/cooling systems would result in significant damage to historic materials.

*Not Recommended*

Installing a new mechanical system so that character-defining structural or interior features are radically changed, damaged, or destroyed.

Failing to consider the weight and design of new mechanical equipment so that, as a result, historic structural members or finished surfaces are weakened or cracked.

Installing vertical runs of ducts, pipes, and cables in places where they will obscure character-defining features.

Concealing mechanical equipment in walls or ceilings in a manner that requires the removal of historic building material.

Installing a "dropped" acoustical ceiling to hide mechanical equipment when this destroys the proportions of character-defining interior spaces.

Cutting through features such as masonry walls in order to install air conditioning units.

Radically changing the appearance of the historic building or damaging or destroying windows by installing heating/air conditioning units in historic window frames.

## Building Site

*Recommended*

*Identifying, retaining, and preserving* buildings and their features as well as features of the site that are important in defining its overall historic character. Site features may include circulation systems such as walks, paths, roads, or parking; vegetation such as trees, shrubs, fields, or herbaceous plant material; landforms such as terracing, berms or grading; furnishings such as lights, fences, or benches; decorative elements such as sculpture, statuary or monuments; water features including fountains, streams, pools, or lakes; and subsurface archeological features which are important in defining the history of the site.

Retaining the historic relationship between buildings and the landscape.

*Protecting and maintaining* buildings and the site by providing proper drainage to assure that water does not erode foundation walls; drain toward the building; or damage or erode the landscape.

Minimizing disturbance of terrain around buildings or elsewhere on the site, thus reducing the possibility of destroying or damaging important landscape features or archeological resources.

*Not Recommended*

Removing or radically changing buildings and their features or site features which are important in defining the overall historic character of the property so that, as a result, the character is diminished.

Removing or relocating buildings or landscape features, thus destroying the historic relationship between buildings and the landscape.

Removing or relocating historic buildings on a site or in a complex of related historic structures—such as a mill complex or farm—thus diminishing the historic character of the site or complex.

Moving buildings onto the site, thus creating a false historical appearance.

Radically changing the grade level of the site. For example, changing the grade adjacent to a building to permit development of a formerly below-grade area that would drastically change the historic relationship of the building to its site.

Failing to maintain adequate site drainage so that buildings and site features are damaged or destroyed; or alternatively, changing the site grading so that water no longer drains properly.

Introducing heavy machinery into areas where it may disturb or damage important landscape features or archeological resources.

*Recommended*

Surveying and documenting areas where the terrain will be altered to determine the potential impact to important landscape features or archeological resources.

Protecting, e.g., preserving in place important archeological resources.

Planning and carrying out any necessary investigation using professional archeologists and modern archeological methods when preservation in place is not feasible.

Preserving important landscape features, including ongoing maintenance of historic plant material.

Protecting the building and landscape features against arson and vandalism before rehabilitation work begins, i.e., erecting protective fencing and installing alarm systems that are keyed into local protection agencies.

Providing continued protection of historic building materials and plant features through appropriate cleaning, rust removal, limited paint removal, and re-application of protective coating systems; and pruning and vegetation management.

Evaluating the overall condition of the materials and features of the property to determine whether more than protection and maintenance are required, that is, if repairs to building and site features will be necessary.

*Not Recommended*

Failing to survey the building site prior to the beginning of rehabilitation work which results in damage to, or destruction of, important landscape features or archeological resources.

Leaving known archeological material unprotected so that it is damaged during rehabilitation work.

Permitting unqualified personnel to perform data recovery on archeological resources so that improper methodology results in the loss of important archeological material.

Allowing important landscape features to be lost or damaged due to a lack of maintenance.

Permitting the property to remain unprotected so that the building and landscape features or archeological resources are damaged or destroyed.

Removing or destroying features from the building or site such as wood siding, iron fencing, masonry balustrades, or plant material.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of building and site features results.

Failing to undertake adequate measures to assure the protection of building and site features.

## Rehabilitation

### Recommended

**Repairing** features of the building and site by reinforcing historic materials.

**Replacing** in kind an entire feature of the building or site that is too deteriorated to repair if the overall form and detailing are still evident. Physical evidence from the deteriorated feature should be used as a model to guide the new work. This could include an entrance or porch, walkway, or fountain. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

Replacing deteriorated or damaged landscape features in kind.

### Not Recommended

Replacing an entire feature of the building or site such as a fence, walkway, or driveway when repair of materials and limited compatible replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the building or site feature or that is physically or chemically incompatible.

Removing a feature of the building or site that is unrepairable and not replacing it; or replacing it with a new feature that does not convey the same visual appearance.

Adding conjectural landscape features to the site such as period reproduction lamps, fences, fountains, or vegetation that are historically inappropriate, thus creating a false sense of historic development.

## Rehabilitation

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation project work and should only be considered after the preservation concerns listed above have been addressed.*

### Recommended

#### Design for the Replacement of Missing Historic Features

Designing and constructing a new feature of a building or site when the historic feature is completely missing, such as an outbuilding, terrace, or driveway. It may be based on historical, pictorial, and physical documentation, or be a new design that is compatible with the historic character of the building and site.

#### Alterations/Additions for the New Use

Designing new on-site parking, loading docks, or ramps when required by the new use so that they are as unobtrusive as possible and assure the preservation of the historic relationship between the building or buildings and the landscape.

Designing new exterior additions to historic buildings or adjacent new construction which is compatible with the historic character of the site and which preserves the historic relationship between the building or buildings and the landscape.

Removing non-significant buildings, additions, or site features which detract from the historic character of the site.

### Not Recommended

Creating a false historical appearance because the replaced feature is based on insufficient historical, pictorial, and physical documentation.

Introducing a new building or site feature that is out of scale or of an otherwise inappropriate design.

Introducing a new landscape feature, including plant material, that is visually incompatible with the site, or that alters or destroys the historic site patterns or vistas.

Locating any new construction on the building site in a location which contains important landscape features or open space, for example removing a lawn and walkway and installing a parking lot.

Placing parking facilities directly adjacent to historic buildings where automobiles may cause damage to the buildings or landscape features, or be intrusive to the building site.

Introducing new construction onto the building site which is visually incompatible in terms of size, scale, design, materials, color, and texture, which destroys historic relationships on the site or which damages or destroys important landscape features.

Removing a historic building in a complex of buildings, or removing a building feature, or a landscape feature which is important in defining the historic character of the site.



### Setting (District/Neighborhood)

#### *Recommended*

*Identifying retaining, and preserving* building and landscape features which are important in defining the historic character of the setting. Such features can include roads and streets, furnishings such as lights or benches, vegetation, gardens and yards, adjacent open space such as fields, parks, commons or woodlands, and important views or visual relationships.

Retaining the historic relationship between buildings and landscape features of the setting. For example, preserving the relationship between a town common and its adjacent historic houses, municipal buildings, historic roads, and landscape features.

*Protecting and maintaining* historic building materials and planr features through appropriate cleaning, rust removal, limited paint removal, and reapplication of protective coating systems; and pruning and vegetation management.

Protecting building and landscape features such as lighting or trees, against arson and vandalism before rehabilitation work begins by erecting protective fencing and installing alarm systems that are keyed into local protection agencies.

Evaluating the overall condition of the building and landscape features to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

#### *Not Recommended*

Removing or radically changing those features of the setting which are important in defining the historic character.

Destroying the relationship between the buildings and landscape features within the setting by widening existing streets, changing landscape materials or constructing inappropriately located new streets or parking.

Removing or relocating historic buildings or landscape features, thus destroying their historic relationship within the setting.

Failing to provide adequate protection of materials on a cyclical basis which results in the deterioration of building and landscape features.

Permitting the building and setting to remain unprotected so that interior or exterior features are damaged.

Stripping or removing features from buildings or the setting such as wood siding, iron fencing, terra cotta balusters, or plant material.

Failing to undertake adequate measures to assure the protection of building and landscape features.

#### *Recommended*

Repairing features of the building and landscape by reinforcing the historic materials. Repair will also generally include the replacement in kind—or with a compatible substitute material—of those extensively deteriorated or missing parts of features when there are surviving prototypes such as porch balustrades or paving materials.

*Replacing in kind* an entire feature of the building or landscape that is too deteriorated to repair—when the overall form and detailing are still evident—using the physical evidence as a model to guide the new work. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered.

#### *Not Recommended*

Replacing an entire feature of the building or landscape when repair of materials and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the building or landscape, or that is physically, chemically, or ecologically incompatible.

Removing a feature of the building or landscape that is unrepairable and not replacing it; or replacing it with a new feature that does not convey the same visual appearance.

*The following work is highlighted to indicate that it represents the particularly complex technical or design aspects of Rehabilitation projects and should only be considered after the preservation concerns listed above have been addressed.*

#### *Recommended*

##### **Design for the Replacement of Missing Historic Features**

Designing and constructing a new feature of the building or landscape when the historic feature is completely missing, such as row house steps, a porch, a streetlight, or terrace. It may be a restoration based on documentary or physical evidence, or be a new design that is compatible with the historic character of the setting.

##### **Alterations/Additions for the New Use**

Designing required new parking so that it is as unobtrusive as possible, thus minimizing the effect on the historic character of the setting. Shared parking should also be planned so that several businesses can utilize one parking area as opposed to introducing numerous, multiple lots.

Designing and constructing new additions to historic buildings when required by the new use. New work should be compatible with the historic character of the setting in terms of size, scale, design, material, color, and texture.

Removing nonsignificant buildings, additions or landscape features which detract from the historic character of the setting.

#### *Not Recommended*

Creating a false historical appearance because the replaced feature is based on insufficient documentary or physical evidence.

Introducing a new building or landscape feature that is out of scale or otherwise inappropriate to the setting's historic character, e.g., replacing picket fencing with chain link fencing.

Placing parking facilities directly adjacent to historic buildings which result in damage to historic landscape features, such as the removal of plant material, relocation of paths and walkways, or blocking of alleys.

Introducing new construction into historic districts that is visually incompatible or that destroys historic relationships within the setting.

Removing a historic building, building feature, or landscape feature that is important in defining the historic character of the setting.



*If a rear elevation of a historic building is distinctive and highly visible in the neighborhood, altering it may not meet the Standards. (a and b) This 3-story brick rowhouse featured a second story gallery and brick kitchen wing characteristic of other residences in the district which backed onto a connecting roadway. (c) In the rehabilitation, the wing and gallery were demolished and a large addition constructed that severely impacted the building's historic form and character.*

*Although the work in these sections is quite often an important aspect of rehabilitation projects, it is usually not part of the overall process of preserving character-defining features (maintenance, repair, replacement); rather, such work is assessed for its potential negative impact on the building's historic character. For this reason, particular care must be taken not to obscure, radically change, damage, or destroy character-defining features in the process of rehabilitation work.*

### Energy Efficiency

#### Recommended

##### Masonry/Wood/Architectural Metals

Installing thermal insulation in attics and in unheated cellars and crawlspaces to increase the efficiency of the existing mechanical systems.

Installing insulating material on the inside of masonry walls to increase energy efficiency where there is no character-defining interior molding around the windows or other interior architectural detailing.

##### Windows

Utilizing the inherent energy conserving features of a building by maintaining windows and louvers in good operable condition for natural ventilation.

Improving thermal efficiency with weatherstripping, storm windows, caulking, interior shades, and if historically appropriate, blinds and awnings.

Installing interior storm windows with air-tight gaskets, ventilating holes, and/or removable clips to ensure proper maintenance and to avoid condensation damage to historic windows.

Installing exterior storm windows which do not damage or obscure the windows and frames.

#### Not Recommended

Applying thermal insulation with a high moisture content in wall cavities which may damage historic fabric.

Installing wall insulation without considering its effect on interior molding or other architectural detailing.

Removing historic shading devices rather than keeping them in an operable condition.

Replacing historic multi-paned sash with new thermal sash utilizing false muntins.

Installing interior storm windows that allow moisture to accumulate and damage the window.

Installing new exterior storm windows which are inappropriate in size or color.

Replacing windows or transoms with fixed thermal glazing or permitting windows and transoms to remain inoperable rather than utilizing them for their energy conserving potential.

#### Recommended

##### Entrances and Porches

Maintaining porches and double vestibule entrances so that they can retain heat or block the sun and provide natural ventilation.

##### Interior Features

Retaining historic interior shutters and transoms for their inherent energy conserving features.

##### Mechanical Systems

Improving energy efficiency of existing mechanical systems by installing insulation in attics and basements.

##### Building Site

Retaining plant materials, trees, and landscape features which perform passive solar energy functions such as sun shading and wind breaks.

##### Setting (District/Neighborhood)

Maintaining those existing landscape features which moderate the effects of the climate on the setting such as deciduous trees, evergreen wind-blocks, and lakes or ponds.

##### New Additions to Historic Buildings

Placing a new addition that may be necessary to increase energy efficiency on non-character-defining elevations.

#### Not Recommended

Changing the historic appearance of the building by enclosing porches.

Removing historic interior features which play an energy conserving role.

Replacing existing mechanical systems that could be repaired for continued use.

Removing plant materials, trees, and landscape features that perform passive solar energy functions.

Stripping the setting of landscape features and landforms so that effects of the wind, rain, and sun result in accelerated deterioration of the historic building.

Designing a new addition which obscures, damages, or destroys character-defining features.




### New Additions to Historic Buildings

#### Recommended

Placing functions and services required for the new use in non-character-defining interior spaces rather than constructing a new addition.

Constructing a new addition so that there is the least possible loss of historic materials and so that character-defining features are not obscured, damaged, or destroyed.

Designing a new addition in a manner that makes clear what is historic and what is new.

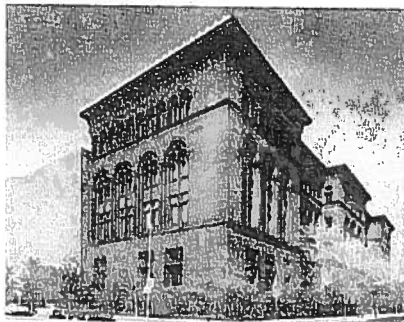

112 New Additions to Historic Buildings

#### Not Recommended

Expanding the size of the historic building by constructing a new addition when the new use could be met by altering non-character-defining interior spaces.

Attaching a new addition so that the character-defining features of the historic building are obscured, damaged, or destroyed.

Duplicating the exact form, material, style, and detailing of the historic building in a new addition so that the new work appears to be part of the historic building.

Imitating a historic style or period of architecture in a new addition.

*Rehabilitation, like Preservation, acknowledges a building's change over time; the retention and repair of existing historic materials and features is thus always recommended. However, unlike Preservation, the dual goal of Rehabilitation is to—respectfully—add to or alter a building in order to meet new use requirements. This downtown Chicago library was expanded in 1981 when additional space was required with light and humidity control for the rare book collection. The compatible 10-story wing was linked to the historic block on side and rear elevations. Its simple design is compatible with the historic form, features, and detailing; old and new are clearly differentiated.*

*Photo: Dave Clifton.*

#### Recommended

Considering the design for an attached exterior addition in terms of its relationship to the historic building as well as the historic district or neighborhood. Design for the new work may be contemporary or may reference design motifs from the historic building. In either case, it should always be clearly differentiated from the historic building and be compatible in terms of mass, materials, relationship of solids to voids, and color.

Placing a new addition on a non-character-defining elevation and limiting the size and scale in relationship to the historic building.

Designing a rooftop addition when required for the new use, that is set back from the wall plane and as inconspicuous as possible when viewed from the street.

#### Not Recommended

Designing and constructing new additions that result in the diminution or loss of the historic character of the resource, including its design, materials, workmanship, location, or setting.

Designing a new addition that obscures, damages, or destroys character-defining features of the historic building.

Constructing a rooftop addition so that the historic appearance of the building is radically changed.

### Accessibility Considerations

#### Recommended


Identifying the historic building's character-defining spaces, features, and finishes so that accessibility code-required work will not result in their damage or loss.

Complying with barrier-free access requirements, in such a manner that character-defining spaces, features, and finishes are preserved.

Working with local disability groups, access specialists, and historic preservation specialists to determine the most appropriate solution to access problems.

Providing barrier-free access that promotes independence for the disabled person to the highest degree practicable, while preserving significant historic features.

Designing new or additional means of access that are compatible with the historic building and its setting.



#### Not Recommended

Undertaking code-required alterations before identifying those spaces, features, or finishes which are character-defining and must therefore be preserved.

Altering, damaging, or destroying character-defining features in attempting to comply with accessibility requirements.

Making changes to buildings without first seeking expert advice from access specialists and historic preservationists, to determine solutions.

Making access modifications that do not provide a reasonable balance between independent, safe access and preservation of historic features.

Designing new or additional means of access without considering the impact on the historic building and its setting.

*Making a building accessible to the public is a requirement under the Americans with Disabilities Act of 1990, whatever the treatment. Full, partial, or alternative approaches to accessibility depends upon the historical significance of a building and the ability to make changes. In these examples, thresholds that exceed allowable heights were modified several ways to increase accessibility, without jeopardizing the historic character. Drawing: Uniform Federal Accessibility Standard (UFAS) Retrofit Manual.*

### Health and Safety Considerations

#### Recommended

Identifying the historic building's character-defining spaces, features, and finishes so that code-required work will not result in their damage or loss.

Complying with health and safety codes, including seismic code requirements, in such a manner that character-defining spaces, features, and finishes are preserved.

Removing toxic building materials only after thorough testing has been conducted and only after less invasive abatement methods have been shown to be inadequate.

Providing workers with appropriate personal protective equipment for hazards found in the worksite.

Working with local code officials to investigate systems, methods, or devices of equivalent or superior effectiveness and safety to those prescribed by code so that unnecessary alterations can be avoided.

Upgrading historic stairways and elevators to meet health and safety codes in a manner that assures their preservation, i.e., so that they are not damaged or obscured.

Installing sensitively designed fire suppression systems, such as sprinkler systems that result in retention of historic features and finishes.

Applying fire-retardant coatings, such as intumescent paints, which expand during fire to add thermal protection to steel.

Adding a new stairway or elevator to meet health and safety codes in a manner that preserves adjacent character-defining features and spaces.

Placing a code-required stairway or elevator that cannot be accommodated within the historic building in a new exterior addition. Such an addition should be on an inconspicuous elevation.

#### Not Recommended

Undertaking code-required alterations to a building or site before identifying those spaces, features, or finishes which are character-defining and must therefore be preserved.

Altering, damaging, or destroying character-defining spaces, features, and finishes while making modifications to a building or site to comply with safety codes.

Destroying historic interior features and finishes without careful testing and without considering less invasive abatement methods.

Removing unhealthful building materials without regard to personal and environmental safety.

Making changes to historic buildings without first exploring equivalent health and safety systems, methods, or devices that may be less damaging to historic spaces, features, and finishes.

Damaging or obscuring historic stairways and elevators or altering adjacent spaces in the process of doing work to meet code requirements.

Covering character-defining wood features with fire-resistant sheathing which results in altering their visual appearance.

Using fire-retardant coatings if they damage or obscure character-defining features.

Radically changing, damaging, or destroying character-defining spaces, features, or finishes when adding a new code-required stairway or elevator.

Constructing a new addition to accommodate code-required stairs and elevators on character-defining elevations highly visible from the street; or where it obscures, damages, or destroys character-defining features.

# Standards for Restoration & Guidelines for Restoring Historic Buildings

*Restoration is defined as the act or process of accurately depicting the form, features, and character of a property as it appeared at a particular period of time by means of the removal of features from other periods in its history and reconstruction of missing features from the restoration period. The limited and sensitive upgrading of mechanical, electrical, and plumbing systems and other code-required work to make properties functional is appropriate within a restoration project.*



## Standards for Restoration

1. A property will be used as it was historically or be given a new use which reflects the property's restoration period.
2. Materials and features from the restoration period will be retained and preserved. The removal of materials or alteration of features, spaces, and spatial relationships that characterize the period will not be undertaken.
3. Each property will be recognized as a physical record of its time, place, and use. Work needed to stabilize, consolidate and conserve materials and features from the restoration period will be physically and visually compatible, identifiable upon close inspection, and properly documented for future research.
4. Materials, features, spaces, and finishes that characterize other historical periods will be documented prior to their alteration or removal.
5. Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize the restoration period will be preserved.
6. Deteriorated features from the restoration period will be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature will match the old in design, color, texture, and, where possible, materials.
7. Replacement of missing features from the restoration period will be substantiated by documentary and physical evidence. A false sense of history will not be created by adding conjectural features, features from other properties, or by combining features that never existed together historically.
8. Chemical or physical treatments, if appropriate, will be undertaken using the gentlest means possible. Treatments that cause damage to historic materials will not be used.
9. Archeological resources affected by a project will be protected and preserved in place. If such resources must be disturbed, mitigation measures will be undertaken.
10. Designs that were never executed historically will not be constructed.

## Guidelines for Restoring Historic Buildings

### Introduction

Rather than maintaining and preserving a building as it has evolved over time, the expressed goal of the Standards for Restoration and Guidelines for Restoring Historic Buildings is to make the building appear as it did at a particular—and most significant—time in its history. First, those materials and features from the “restoration period” are identified, based on thorough historical research. Next, features from the restoration period are maintained, protected, repaired (i.e., stabilized, consolidated, and conserved), and replaced, if necessary. As opposed to other treatments, the scope of work in Restoration can include removal of features from other periods; missing features from the restoration period may be replaced, based on documentary and physical evidence, using traditional materials or compatible substitute materials. The final guidance emphasizes that only those designs that can be documented as having been built should be re-created in a restoration project.

### Identify, Retain, and Preserve Materials and Features from the Restoration Period

The guidance for the treatment Restoration begins with recommendations to identify the form and detailing of those existing architectural materials and features that are significant to the restoration period as established by historical research and documentation. Thus, guidance on *identifying, retaining, and preserving* features from the restoration period is always given first. The historic building's appearance may be defined by the form and detailing of its exterior materials, such as masonry, wood, and metal; exterior features, such as roofs, porches, and windows;

interior materials, such as plaster and paint; and interior features, such as moldings and stairways, room configuration and spatial relationships, as well as structural and mechanical systems; and the building's site and setting.

### Protect and Maintain Materials and Features from the Restoration Period

After identifying those existing materials and features from the restoration period that must be retained in the process of Restoration work, then *protecting and maintaining* them is addressed. Protection generally involves the least degree of intervention and is preparatory to other work. For example, protection includes the maintenance of historic material through treatments such as rust removal, caulking, limited paint removal, and re-application of protective coatings; the cyclical cleaning of roof gutter systems; or installation of fencing, alarm systems and other temporary protective measures. Although a historic building will usually require more extensive work, an overall evaluation of its physical condition should always begin at this level.


### Repair (Stabilize, Consolidate, and Conserve) Materials and Features from the Restoration Period

Next, when the physical condition of restoration period features requires additional work, *repairing by stabilizing, consolidating, and conserving* is recommended. Restoration guidance focuses upon the preservation of those materials and features that are significant to the period. Consequently, guidance for repairing a historic material, such as masonry, again begins with the least degree of intervention possible, such as strengthening fragile materials through consolidation, when appropriate, and repointing with mortar of an appropriate strength. Repairing masonry as well as wood and architectural metals includes

patching, splicing, or otherwise reinforcing them using recognized preservation methods. Similarly, portions of a historic structural system could be reinforced using contemporary material such as steel rods. In Restoration, repair may also include the limited replacement in kind—or with compatible substitute material—of extensively deteriorated or missing parts of existing features when there are surviving prototypes to use as a model. Examples could include terra-cotta brackets, wood balusters, or cast iron fencing.

### Replace Extensively Deteriorated Features from the Restoration Period

In Restoration, *replacing* an entire feature from the restoration period (i.e., a cornice, balustrade, column, or stairway) that is too deteriorated to repair may be appropriate. Together with documentary evidence, the form and detailing of the historic feature should be used as a model for the replacement. Using the same kind of material is preferred; however, compatible substitute material may be considered. All new work should be unobtrusively dated to guide future research and treatment.

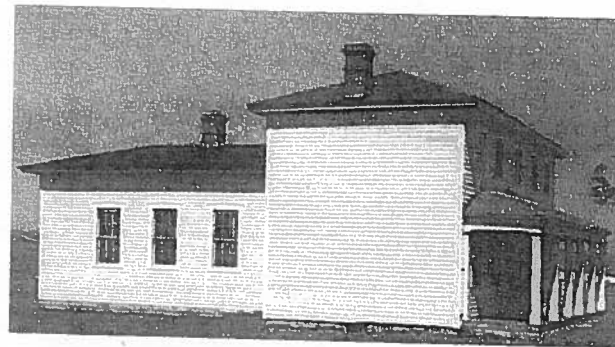

In a project at Fort Hays, Kansas, the wood frame officers' quarters were restored to the late 1860s—their period of significance. This included replacing a missing kitchen ell, chimneys, porch columns, and cornice, and closing a later window opening in the main block. The building and others in the museum complex is used to interpret frontier history.

If documentary and physical evidence are not available to provide an accurate re-creation of missing features, the treatment Rehabilitation might be a better overall approach to project work.

#### Remove Existing Features from Other Historic Periods

Most buildings represent continuing occupancies and change over time, but in Restoration, the goal is to depict the building as it appeared at the most significant time in its history. Thus, work is included to remove or alter existing historic features that do not represent the restoration period. This could include features such as windows, entrances and doors, roof dormers, or landscape features. Prior to altering or removing materials, features, spaces, and finishes that characterize other historical periods, they should be documented to guide future research and treatment.

#### Re-Create Missing Features from the Restoration Period

Most Restoration projects involve re-creating features that were significant to the building at a particular time, but are now missing. Examples could include a stone balustrade, a porch, or cast iron storefront. Each missing feature should be substantiated by documentary and physical evidence. Without sufficient documentation for these "re-creations," an accurate depiction cannot be achieved. Combining features that never existed together historically can also create a false sense of history. Using traditional materials to depict lost features is always the preferred approach; however, using compatible substitute material is an acceptable alternative in Restoration because, as emphasized, the goal of this treatment is to replicate the "appearance" of the historic building at a particular time, not to retain and preserve all historic materials as they have evolved over time.

If documentary and physical evidence are not available to provide an accurate re-creation of missing features, the treatment Rehabilitation might be a better overall approach to project work.

#### Energy Efficiency/Accessibility Considerations/ Health and Safety Code Considerations

These sections of the Restoration guidance address work done to meet accessibility requirements and health and safety code requirements; or limited retrofitting measures to improve energy efficiency. Although this work is quite often an important aspect of restoration projects, it is usually not part of the overall process of protecting, stabilizing, conserving, or repairing features from the restoration period; rather, such work is assessed for its potential negative impact on the building's historic appearance. For this reason, particular care must be taken not to obscure, damage, or destroy historic materials or features from the restoration period in the process of undertaking work to meet code and energy requirements.

*Restoration as a Treatment. When the property's design, architectural, or historical significance during a particular period of time outweighs the potential loss of extant materials, features, spaces, and finishes that characterize other historical periods; when there is substantial physical and documentary evidence for the work; and when contemporary alterations and additions are not planned, Restoration may be considered as a treatment. Prior to undertaking work, a particular period of time, i.e., the restoration period, should be selected and justified, and a documentation plan for Restoration developed.*

## Restoration

### Building Exterior

**Masonry: Brick, stone, terra cotta, concrete, adobe, stucco and mortar**

#### Recommended

*Identifying, retaining, and preserving* masonry features from the restoration period such as walls, brackets, railings, cornices, window architraves, door pediments, steps, and columns; and details such as tooling and bonding patterns, coatings, and color.

*Protecting and maintaining* masonry from the restoration period by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved decorative features.

Cleaning masonry only when necessary to halt deterioration or remove heavy soiling.

Carrying out masonry surface cleaning tests after it has been determined that such cleaning is appropriate. Tests should be observed over a sufficient period of time so that both the immediate and the long range effects are known to enable selection of the gentlest method possible.

#### Not Recommended

Altering masonry features from the restoration period.

Failing to properly document masonry features from the restoration period which may result in their loss.

Applying paint or other coatings such as stucco to masonry or removing paint or stucco from masonry if such treatments cannot be documented to the restoration period.

Changing the type or color of the paint or coating unless the work can be substantiated by historical documentation.

Failing to evaluate and treat the various causes of mortar joint deterioration such as leaking roofs or gutters, differential settlement of the building, capillary action, or extreme weather exposure.

Cleaning masonry surfaces when they are not heavily soiled, thus needlessly introducing chemicals or moisture into historic materials.

Cleaning masonry surfaces without testing or without sufficient time for the testing results to be of value.

## Restoration

### Recommended

Cleaning masonry surfaces with the gentlest method possible, such as low pressure water and detergents, using natural bristle brushes.

Inspecting painted masonry surfaces to determine whether repainting is necessary.

Removing damaged or deteriorated paint only to the next sound layer using the gentlest method possible (e.g., hand-scraping) prior to repainting.

Applying compatible paint coating systems following proper surface preparation.

Repainting with colors that are documented to the restoration period of the building.

Evaluating the existing condition of the masonry to determine whether more than protection and maintenance are required, that is, if repairs to masonry features from the restoration period will be necessary.

*Repairing, stabilizing and conserving* fragile masonry from the restoration period by well-tested consolidants, when appropriate. Repairs should be physically and visually compatible and identifiable upon close inspection for future research.

### Not Recommended

Sandblasting brick or stone surfaces using dry or wet grit or other abrasives. These methods of cleaning permanently erode the surface of the material and accelerate deterioration.

Using a cleaning method that involves water or liquid chemical solutions when there is any possibility of freezing temperatures.

Cleaning with chemical products that will damage masonry, such as using acid on limestone or marble, or leaving chemicals on masonry surfaces.

Applying high pressure water cleaning methods that will damage historic masonry and the mortar joints.

Removing paint that is firmly adhering to, and thus protecting, masonry surfaces.

Using methods of removing paint which are destructive to masonry, such as sandblasting, application of caustic solutions, or high pressure waterblasting.

Failing to follow manufacturers' product and application instructions when repainting masonry.

Using new paint colors that are not documented to the restoration period of the building.

Failing to undertake adequate measures to assure the protection of masonry features from the restoration period.

Removing masonry from the restoration period that could be stabilized, repaired and conserved, or using untested consolidants and untrained personnel, thus causing further damage to fragile historic materials.

## Restoration

### Recommended

Repairing masonry walls and other masonry features by repointing the mortar joints where there is evidence of deterioration such as disintegrating mortar, cracks in mortar joints, loose bricks, damp walls, or damaged plasterwork.

Removing deteriorated mortar by carefully hand-raking the joints to avoid damaging the masonry.

Duplicating and, if necessary, reproducing period mortar in strength, composition, color, and texture.

Duplicating and, if necessary, reproducing period mortar joints in width and in joint profile.

Repairing stucco by removing the damaged material and patching with new stucco that duplicates stucco of the restoration period in strength, composition, color, and texture.

Using mud plaster as a surface coating over unfired, unstabilized adobe because the mud plaster will bond to the adobe.

Cutting damaged concrete back to remove the source of deterioration (often corrosion on metal reinforcement bars). The new patch must be applied carefully so it will bond satisfactorily with, and match, the historic concrete.

### Not Recommended

Removing nondeteriorated mortar from sound joints, then repointing the entire building to achieve a uniform appearance.

Using electric saws and hammers rather than hand tools to remove deteriorated mortar from joints prior to repointing.

Repointing with mortar of high portland cement content (unless it is the content of the historic mortar). This can often create a bond that is stronger than the historic material and can cause damage as a result of the differing coefficient of expansion and the differing porosity of the material and the mortar.

Repointing with a synthetic caulking compound.

Using a "scrub" coating technique to repoint instead of traditional repointing methods.

Changing the width or joint profile when repointing.

Removing sound stucco; or repairing with new stucco that is stronger than the historic material or does not convey the same visual appearance.

Applying cement stucco to unfired, unstabilized adobe. Because the cement stucco will not bond properly, moisture can become entrapped between materials, resulting in accelerated deterioration of the adobe.

Patching concrete without removing the source of deterioration.

## Restoration

### Recommended

Repairing masonry features from the restoration period by patching, piecing-in, or otherwise reinforcing the masonry using recognized preservation methods. Repair may also include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of masonry features from the restoration period when there are surviving prototypes such as terra-cotta brackets or stone balustrades. The new work should be unobtrusively dated to guide future research and treatment.


Applying new or non-historic surface treatments such as water-repellent coatings to masonry only after repointing and only if masonry repairs have failed to arrest water penetration problems.

### Not Recommended

Replacing an entire masonry feature from the restoration period such as a cornice or balustrade when repair of the masonry and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the masonry feature or that is physically or chemically incompatible.

Applying waterproof, water repellent, or non-historic coatings such as stucco to masonry as a substitute for repointing and masonry repairs. Coatings are frequently unnecessary, expensive, and may change the appearance of historic masonry as well as accelerate its deterioration.

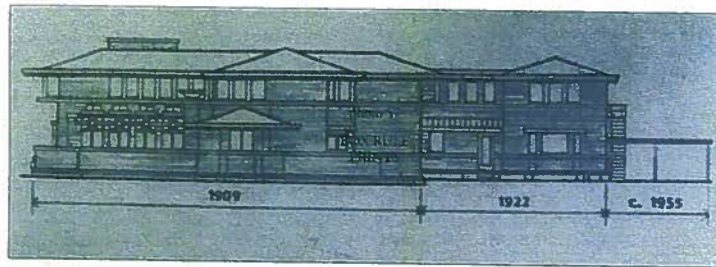

The Meyer May House in Grand Rapids, Michigan, was designed by Frank Lloyd Wright and built in 1909. In 1922, May added to the house for an expanding family. After the May occupancy, the house was altered for use as apartments, with a carport added in 1955. In the 1980s restoration, the Wright's original design was deemed more significant than May's later changes, and, as a result, the additions were removed and the house returned to its 1909 appearance. Drawing: Martha L. Wernefeld, AIA.

## Restoration

### Recommended

Replacing in kind an entire masonry feature from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples can include large sections of a wall, a cornice, balustrade, column, or stairway. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic masonry features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing masonry features from the restoration period using all new materials.

### Not Recommended

Removing a masonry feature from the restoration period that is unrepairable and not replacing it.

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering masonry features from other historic periods such as a later doorway, porch, or steps.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing masonry feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a terra-cotta brackets or stone balustrade.

### Not Recommended

Failing to remove a masonry feature from another period, thus confusing the depiction of the building's significance.

Failing to document masonry features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a masonry feature that was part of the original design for the building but was never actually built, or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.



**Building Exterior**

Wood: Clapboard, weatherboard, shingles, and other wooden siding and decorative elements

*Recommended*

*Identifying, retaining, and preserving* wood features from the restoration period such as siding, cornices, brackets, window architraves, and doorway pediments; and their paints, finishes, and color.

*Protecting and maintaining* wood features from the restoration period by providing proper drainage so that water is not allowed to stand on flat, horizontal surfaces or accumulate in decorative features.

Applying chemical preservatives to wood features such as beam ends or outriggers that are exposed to decay hazards and are traditionally unpainted.

Retaining coatings such as paint that help protect the wood from moisture and ultraviolet light. Paint removal should be considered only where there is paint surface deterioration and as part of an overall maintenance program which involves repainting or applying other appropriate protective coatings.

Inspecting painted wood surfaces to determine whether repainting is necessary or if cleaning is all that is required.

Removing damaged or deteriorated paint to the next sound layer using the gentlest method possible (handscraping and handsanding), then repainting.

*Not Recommended*

Altering wood features from the restoration period.

Failing to properly document wood features from the restoration period which may result in their loss.

Applying paint or other coatings to wood or removing paint from wood if such treatments cannot be documented to the restoration period.

Changing the type or color of the paint or coating unless the work can be substantiated by historical documentation.

Failing to identify, evaluate, and treat the causes of wood deterioration, including faulty flashing, leaking gutters, cracks and holes in siding, deteriorated caulking in joints and seams, plant material growing too close to wood surfaces, or insect or fungus infestation.

Using chemical preservatives such as creosote which, unless they were used historically, can change the appearance of wood features.

Stripping paint or other coatings to reveal bare wood, thus exposing historically coated surfaces to the effects of accelerated weathering.

Removing paint that is firmly adhering to, and thus, protecting wood surfaces.

Using destructive paint removal methods such as propane or butane torches, sandblasting or waterblasting. These methods can irreversibly damage historic woodwork.



Ongoing work at this house focuses on the maintenance and repair of exterior wood features from the restoration period. After scraping and sanding, the wood was painted in colors documented to the Restoration period. Photo: ©Mary Russell, 1992.

*Recommended*

Using with care electric hot-air guns on decorative wood features and electric heat plates on flat wood surfaces when paint is so deteriorated that total removal is necessary prior to repainting.

Using chemical strippers primarily to supplement other methods such as handscraping, hand sanding and the above-recommended thermal devices. Detachable wooden elements such as shutters, doors, and columns may—with the proper safeguards—be chemically dip-stripped.

*Not Recommended*

Using thermal devices improperly so that the historic woodwork is scorched.

Failing to neutralize the wood thoroughly after using chemicals so that new paint does not adhere.

Allowing detachable wood features to soak too long in a caustic solution so that the wood grain is raised and the surface roughened.

## Restoration

### Recommended

Applying compatible paint coating systems following proper surface preparation.

Repainting with colors that are documented to the restoration period of the building.

Evaluating the existing condition of the wood to determine whether more than protection and maintenance are required, that is, if repairs to wood features from the restoration period will be necessary.

*Repairing, stabilizing, and conserving* fragile wood from the restoration period using well-tested consolidants, when appropriate. Repairs should be physically and visually compatible and identifiable upon close inspection for future research.

Repairing wood features from the restoration period by patching, piecing-in, or otherwise reinforcing the wood using recognized preservation methods. Repair may also include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of features from the restoration period where there are surviving prototypes such as brackets, molding, or sections of siding. The new work should be unobtrusively dated to guide future research and treatment.

*Replacing* in kind an entire wood feature from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples of wood features include a cornice, entablature or balustrade. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

### Not Recommended

Failing to follow manufacturers' product and application instructions when repainting exterior woodwork.

Using new colors that are not documented to the restoration period of the building.

Failing to undertake adequate measures to assure the protection of wood features from the restoration period.

Removing wood from the restoration period that could be stabilized and conserved; or using untested consolidants and untrained personnel, thus causing further damage to fragile historic materials.

Replacing an entire wood feature from the restoration period such as a cornice or wall when repair of the wood and limited replacement of deteriorated or missing parts are appropriate.

Using substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the wood feature or that is physically or chemically incompatible.

Removing a wood feature from the restoration period that is unrepairable and not replacing it.

## Restoration

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic wood features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing wood features from the restoration period using all new materials.*

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering wood features from other historic periods such as a later doorway, porch, or steps.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing wood feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a roof dormer or porch.

### Not Recommended

Failing to remove a wood feature from another period, thus confusing the depiction of the building's significance.

Failing to document wood features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a wood feature that was part of the original design for the building, but was never actually built, or constructing a feature, which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Restoration

### Building Exterior

**Architectural Metals:** Cast iron, steel pressed tin, copper, aluminum, and zinc

#### *Recommended*

*Identifying, retaining, and preserving* architectural metal features from the restoration period such as columns, capitals, window hoods, or stairways; and their finishes and colors. Identification is also critical to differentiate between metals prior to work. Each metal has unique properties and thus requires different treatments.

*Protecting and maintaining* restoration period architectural metals from corrosion by providing proper drainage so that water does not stand on flat, horizontal surfaces or accumulate in curved, decorative features.

Cleaning architectural metals, when appropriate, to remove corrosion prior to repainting or applying other appropriate protective coatings.

Identifying the particular type of metal prior to any cleaning procedure and then testing to assure that the gentlest cleaning method possible is selected or determining that cleaning is inappropriate for the particular metal.

Cleaning soft metals such as lead, tin, copper,terneplate, and zinc with appropriate chemical methods because their finishes can be easily abraded by blasting methods.

#### *Not Recommended*

Altering architectural metal features from the restoration period.

Failing to properly document architectural metal features from the restoration period which may result in their loss.

Changing the type of finish, historic color, or accent scheme unless the work can be substantiated by historical documentation.

Failing to identify, evaluate, and treat the causes of corrosion, such as moisture from leaking roofs or gutters.

Exposing metals which were intended to be protected from the environment.

Applying paint or other coatings to metals such as copper, bronze, or stainless steel that were meant to be exposed.

Using cleaning methods which alter or damage the historic color, texture, and finish of the metal; or cleaning when it is inappropriate for the metal.

Removing the patina of historic metal. The patina may be a protective coating on some metals, such as bronze or copper, as well as a significant historic finish.

Cleaning soft metals such as lead, tin, copper,terneplate, and zinc with grit blasting which will abrade the surface of the metal.

## Restoration

#### *Recommended*

Using the gentlest cleaning methods for cast iron, wrought iron, and steel—hard metals—in order to remove paint buildup and corrosion. If hand scraping and wire brushing have proven ineffective, low pressure grit blasting may be used as long as it does not abrade or damage the surface.

Applying appropriate paint or other coating systems after cleaning in order to decrease the corrosion rate of metals or alloys.

Repainting with colors that are documented to the restoration period of the building.

Applying an appropriate protective coating such as lacquer to an architectural metal feature such as a bronze door which is subject to heavy pedestrian use.

Evaluating the existing condition of the architectural metals to determine whether more than protection and maintenance are required, that is, if repairs to metal features from the restoration period will be necessary.

*Repairing, stabilizing, and conserving* fragile architectural metal from the restoration period using well-tested consolidants, when appropriate. Repairs should be physically and visually compatible and identifiable upon close inspection for future research.

Repairing architectural metal features from the restoration period by patching, splicing, or otherwise reinforcing the metal using recognized preservation methods. Repairs may also include the limited replacement in kind—or with a compatible substitute material—of those extensively deteriorated or missing parts of features from the restoration period when there are surviving prototypes such as porch balusters, column capitals or bases, or porch cresting. The new work should be unobtrusively dated to guide future research and treatment.

#### *Not Recommended*

Failing to employ gentler methods prior to abrasively cleaning cast iron, wrought iron or steel; or using high pressure grit blasting.

Failing to re-apply protective coating systems to metals or alloys that require them after cleaning so that accelerated corrosion occurs.

Using new colors that are not documented to the restoration period of the building.

Failing to assess pedestrian use or new access patterns so that architectural metal features are subject to damage by use or inappropriate maintenance such as salting adjacent sidewalks.


Failing to undertake adequate measures to assure the protection of architectural metal features from the restoration period.

Removing architectural metal from the restoration period that could be stabilized and conserved; or using untested consolidants and untrained personnel, thus causing further damage to fragile historic materials.

Replacing an entire architectural metal feature from the restoration period such as a column or a balustrade when repair of the metal and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the architectural metal feature or that is physically or chemically incompatible.

## Restoration

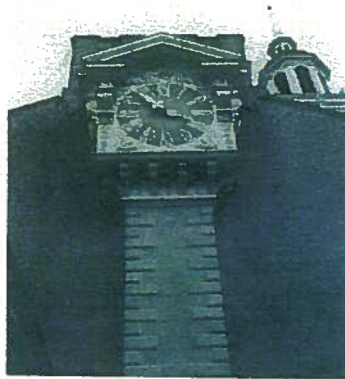

### Recommended

Replacing in kind an entire architectural metal feature from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples could include cast iron porch steps or roof cresting. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

*The Standards for Restoration call for the repair of existing features from the restoration period as well as the re-creation of missing features from the period. In some instances, when missing features are replaced, substitute materials may be considered if they convey the appearance of the historic materials. In this example at Philadelphia's Independence Hall, the clock was re-built in 1972-73 using cast stone and wood with fiberglass and polyester bronze ornamentation. Photo: Lee H. Nelson, FALA.*

### Not Recommended

Removing an architectural metal feature from the restoration period that is unrepairable and not replacing it.

## Restoration

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic architectural metal features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing architectural metal features from the restoration period using all new materials.*

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering architectural metal features from other historic periods such as a later cast iron porch railing or aluminum windows.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing architectural metal feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a cast iron storefront or porch.

### Not Recommended

Failing to remove an architectural metal feature from another period, thus confusing the depiction of the building's significance.

Failing to document architectural metal features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing an architectural metal feature that was part of the original design for the building but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Exterior

### Roofs

#### Recommended

Identifying, retaining, and preserving roofs and roof features from the restoration period. This includes the roof's shape, such as hipped, gambrel, and mansard; decorative features such as cupolas, cresting, chimneys, and weathervanes; and roofing material such as slate, wood, clay tile, and metal, as well as size, color, and patterning.

Protecting and maintaining a restoration period roof by cleaning the gutters and downspouts and replacing deteriorated flashing. Roof sheathing should also be checked for proper venting to prevent moisture condensation and water penetration; and to insure that materials are free from insect infestation.

Providing adequate anchorage for roofing material to guard against wind damage and moisture penetration.

Protecting a leaking roof with plywood and building paper until it can be properly repaired.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, that is, if repairs to roofs and roof features will be necessary.

Repairing a roof from the restoration period by reinforcing the materials which comprise roof features. Repairs will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of features when there are surviving prototypes such as cupola louvers, dentils, dormer roofing, or slates, tiles, or wood shingles. The new work should be unobtrusively dated to guide future research and treatment.

## Restoration

#### Not Recommended

Altering roofs and roof features from the restoration period.

Failing to properly document roof features from the restoration period which may result in their loss.

Changing the type or color of roofing materials unless the work can be substantiated by historical documentation.

Failing to clean and maintain gutters and downspouts properly so that water and debris collect and cause damage to roof fasteners, sheathing, and the underlying structure.

Allowing roof fasteners, such as nails and clips, to corrode so that roofing material is subject to accelerated deterioration.

Permitting a leaking roof to remain unprotected so that accelerated deterioration of historic building materials—masonry, wood, plaster, paint and structural members—occurs.

Failing to undertake adequate measures to assure the protection of roofs and roof features from the restoration period.

Replacing an entire roof feature from the restoration period such as a cupola or dormer when the repair of materials and limited replacement of deteriorated or missing parts are appropriate.

Failing to reuse intact slate or tile when only the roofing substrate needs replacement.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the roof or that is physically or chemically incompatible.

## Restoration

#### Recommended

Replacing in kind an entire roof feature from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model to reproduce the feature. Examples can include a large section of roofing, or a dormer or chimney. If using the same kind of material is not technically or economically feasible, then a comparable substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

*The following Restoration work involves the removal or alteration of existing historic roofs and roof features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing roof features from the restoration period using all new materials in order to create an accurate historic appearance.*

#### Recommended

##### Removing Existing Features from Other Historic Periods

Removing or altering roofs or roof features from other historic periods such as a later dormer or asphalt roofing.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

##### Re-creating Missing Features from the Restoration Period

Re-creating missing roofing material or a roof feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a dormer or cupola.

#### Not Recommended

Removing a roof feature from the restoration period that is unrepairable, and not replacing it; or failing to document the new work.

#### Not Recommended

Failing to remove a roof feature from another period, thus confusing the depiction and of the building's significance.

Failing to document roofing materials and roof features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a roof feature that was part of the original design for the building, but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Exterior

### Windows

#### *Recommended*

*Identifying, retaining, and preserving* windows—and their functional and decorative features—from the restoration period. Such features can include frames, sash, muntins, glazing, sills, heads, hoodmolds, panelled or decorated jambs and moldings, and interior and exterior shutters and blinds.

Conducting an indepth survey of the condition of existing windows from the restoration period early in the planning process so that repair and upgrading methods and possible replacement options can be fully explored.

*Protecting and maintaining* the wood and architectural metals from the restoration period which comprise the window frame, sash, muntins, and surrounds through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Making windows weathertight by re-caulking, and replacing or installing weatherstripping. These actions also improve thermal efficiency.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, i.e. if repairs to windows and window features will be required.

## Restoration

#### *Not Recommended*

Altering windows or window features from the restoration period.

Failing to properly document window features from the restoration period which may result in their loss.

Applying paint or other coatings to window features or removing them if such treatments cannot be documented to the restoration period.

Changing the type or color of protective surface coatings on window features unless the work can be substantiated by historical documentation.

Stripping windows of sound material such as wood, cast iron, and bronze.

Replacing windows from the restoration period solely because of peeling paint, broken glass, stuck sash, and high air infiltration. These conditions, in themselves, are no indication that windows are beyond repair.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of the window results.

Retrofitting or replacing windows from the restoration period rather than maintaining the sash, frame, and glazing.

Failing to undertake adequate measures to assure the protection of window materials from the restoration period.

## Restoration

#### *Recommended*

*Repairing* window frames and sash from the restoration period by patching, splicing, consolidating or otherwise reinforcing. Such repair may also include replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts when there are surviving prototypes such as architraves, hoodmolds, sash, sills, and interior or exterior shutters and blinds. The new work should be unobtrusively dated to guide future research and treatment.

*Replacing* in kind a window feature from the restoration period that is too deteriorated to repair using the same sash and pane configuration and other design details. If using the same kind of material is not technically or economically feasible when replacing windows deteriorated beyond repair, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

#### *Not Recommended*

Replacing an entire window from the restoration period when repair of materials and limited replacement of deteriorated or missing parts are appropriate.

Failing to reuse serviceable window hardware such as brass sash lifts and sash locks.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the window or that is physically or chemically incompatible.

Removing a window feature from the restoration period that is unrepairable and not replacing it; or failing to document the new work.

## Restoration

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic windows and window features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing window features from the restoration period using all new materials.*

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering windows or window features from other historic periods, such as later single-pane glazing or inappropriate shutters.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, select examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing window or window feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a handmold or shutter.

### Not Recommended

Failing to remove a window feature from another period, thus confusing the depiction of the building's significance.

Failing to document window features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a window feature that was part of the original design for the building, but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Restoration

### Building Exterior

#### Entrances and Porches

##### Recommended

*Identifying, retaining, and preserving* entrances and porches from the restoration period—and their functional and decorative features—such as doors, fanlights, sidelights, pilasters, entablatures, columns, balustrades, and stairs.

*Protecting and maintaining* the masonry, wood, and architectural metals that comprise restoration period entrances and porches through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and re-application of protective coating systems.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required; that is, if repairs to entrance and porch features will be necessary.

##### Not Recommended

Altering entrances and porch features from the restoration period.

Failing to properly document entrance and porch features from the restoration period which may result in their loss.

Applying paint or other coatings to entrance and porch features or removing them if such treatments cannot be documented to the restoration period.

Changing the type or color of protective surface coatings on entrance and porch features unless the work can be substantiated by historical documentation.

Stripping entrances and porches of sound material such as wood, iron, cast iron, terra cotta, tile and brick.

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of entrances and porches results.

Failing to undertake adequate measures to assure the protection of historic entrances and porches from the restoration period.




## Restoration

### Recommended

**Repairing** entrances and porches from the restoration period by reinforcing the historic materials. Repairs will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of repeated features where there are surviving prototypes such as balustrades, cornices, entablatures, columns, sidelights, and stairs. The new work should be unobtrusively dated to guide future research and treatment.

**Replacing** in kind an entire entrance or porch from the restoration period that is too deteriorated to repair—if the form and detailing are still evident—using the physical evidence as a model to reproduce the feature. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

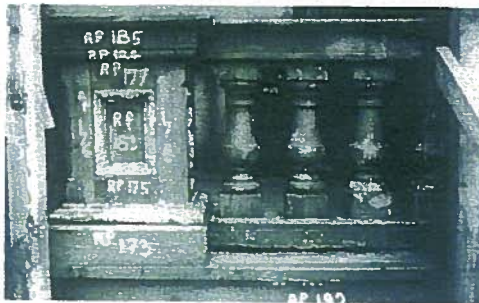

### Not Recommended

Replacing an entire entrance or porch feature from the restoration period when the repair of materials and limited replacement of parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the entrance and porch or that is physically or chemically incompatible.

Removing an entrance or porch feature from the restoration period that is unrepairable and not replacing it; or failing to document the new work.

*Portions of the small porch on an Italianate mansion were carefully numbered prior to Restoration. Some original elements were restored in place, while others had to be removed for repair, then reinstalled. Any element too deteriorated to use was replaced with a new one replicated to match the original design. Photo: Morgan W. Phillips.*

## Restoration

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic entrance and porch features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing entrance and porch features from the restoration period using all new materials.*

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering entrances and porches and their features from other historic periods such as a later porch railing or balustrade.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing entrance or porch or its features that existed during the restoration period based on physical or documentary evidence; for example, duplicating a fanlight or porch column.

### Not Recommended

Failing to remove an entrance or porch feature from another period; thus confusing the depiction of the building's significance.

Failing to document entrance or porch features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing an entrance or porch feature that was part of the original design for the building but was never actually built, or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Exterior Storefronts

### Recommended

*Identifying, retaining, and preserving* storefronts from the restoration period—and their functional and decorative features—such as display windows, signs, doors, transoms, kick plates, corner posts, and entablatures.

*Protecting and maintaining* masonry, wood, and architectural metals which comprise restoration period storefronts through appropriate treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

Protecting storefronts against arson and vandalism before restoration work begins by boarding up windows and installing alarm systems that are keyed into local protection agencies.

Evaluating the existing condition of storefront materials to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

### Not Recommended

Altering storefronts—and their features—from the restoration period.

Failing to properly document storefront features from the restoration period which may result in their loss.

Applying paint or other coatings to storefront features or removing them if such treatments cannot be documented to the restoration period.

Changing the type or color of protective surface coatings on storefront features unless the work can be substantiated by historical documentation.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of storefront features results.

Permitting entry into the building through unsecured or broken windows and doors so that interior features and finishes are damaged by exposure to weather or vandalism.

Stripping storefronts of historic material from the restoration period such as wood, cast iron, terra cotta, carrara glass, and brick.

Failing to undertake adequate measures to assure the protection of storefront materials from the restoration period.

## Restoration

## Restoration

### Recommended

*Repairing* storefronts from the restoration period by reinforcing the historic materials. Repairs will also generally include the limited replacement in kind—or with compatible substitute materials—of those extensively deteriorated or missing parts of storefronts where there are surviving prototypes such as transoms, kick plates, pilasters, or signs. The new work should be unobtrusively dated to guide future research and treatment.

*Replacing* in kind a storefront from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model. If using the same material is not technically or economically feasible, then compatible substitute materials may be considered. The new work should be unobtrusively dated to guide future research and treatment.

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic storefront features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing storefront features from the restoration period using all new materials.*

### Not Recommended

Replacing an entire storefront feature from the restoration period when repair of materials and limited replacement of its parts are appropriate.

Using substitute material for the replacement part that does not convey the same visual appearance as the surviving parts of the storefront or that is physically or chemically incompatible.

Removing a storefront feature from the restoration period that is unrepairable, and not replacing it; or failing to document the new work.

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering storefronts and their features from other historic periods such as inappropriate cladding or signage.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing storefront or storefront feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a display window or transom.

### Not Recommended

Failing to remove a storefront feature from another period, thus confusing the depiction of the building's significance.

Failing to document storefront features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a storefront feature that was part of the original design for the building but was never actually built, or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Interior Structural Systems

### Recommended

*Identifying, retaining, and preserving* structural systems from the restoration period—and individual features of systems—such as post and beam systems, trusses, summer beams, vigas, cast iron columns, above-grade stone foundation walls, or loadbearing brick or stone walls.

*Protecting and maintaining* the structural system by cleaning the roof gutters and downspouts; replacing roof flashing; keeping masonry, wood, and architectural metals in a sound condition; and ensuring that structural members are free from insect infestation.

Examining and evaluating the physical condition of the structural system and its individual features using non-destructive techniques such as X-ray photography.

*Repairing* the structural system by augmenting or upgrading individual parts or features in a manner that is consistent with the restoration period. For example, weakened structural members such as floor framing can be paired with a new member, braced, or otherwise supplemented and reinforced. The new work should be unobtrusively dated to guide future research and treatment.

### Not Recommended

Altering visible features of structural systems from the restoration period.

Failing to properly document structural systems from the restoration period which may result in their loss.

Overloading the existing structural system; or installing equipment or mechanical systems which could damage the structure.

Replacing a loadbearing masonry wall that could be augmented and retained.

Leaving known structural problems untreated such as deflection of beams, cracking and bowing of walls, or racking of structural members.

Failing to provide proper building maintenance so that deterioration of the structural system results. Causes of deterioration include subsurface ground movement, vegetation growing too close to foundation walls, improper grading, fungal rot, and poor interior ventilation that results in condensation.

Utilizing destructive probing techniques that will damage or destroy structural material.

Upgrading the building structurally in a manner that diminishes the historic character of the exterior, such as installing strapping channels or removing a decorative cornice; or that damages interior features or spaces.

Replacing a structural member or other feature of the structural system when it could be augmented and retained.

## Restoration

## Restoration

### Recommended

*Replacing* in kind—or with substitute material—those portions or features of the structural system that are either extensively deteriorated or are missing when there are surviving prototypes such as cast iron columns, roof rafters or trusses, or sections of loadbearing walls. Substitute material should convey the same form, design, and overall visual appearance as the historic feature; and, at a minimum, be equal to its loadbearing capabilities. The new work should be unobtrusively dated to guide future research and treatment.

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic structural systems and features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing structural system features from the restoration period using all new materials.*

### Not Recommended

Installing a visible replacement feature that does not convey the same visual appearance, e.g., replacing an exposed wood summer beam with a steel beam; or failing to document the new work.

Using substitute material that does not equal the loadbearing capabilities of the historic material and design or is otherwise physically or chemically incompatible.

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering visually intrusive structural features from other historic periods such as a non-matching column or exposed ceiling beams.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating a missing structural feature that existed during the restoration period based on physical or documentary evidence; for example, duplicating a viga or cast iron column.

### Not Recommended

Failing to remove or alter a visually intrusive structural feature from another period, thus confusing the depiction of the building's significance.

Failing to document structural features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a structural feature that was part of the original design for the building but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Interior Spaces, Features, and Finishes

### Recommended

#### Interior Spaces

*Identifying, retaining, and preserving* a floor plan or interior spaces from the restoration period. This includes the size, configuration, proportion, and relationship of rooms and corridors; the relationship of features to spaces; and the spaces themselves, such as lobbies, reception halls, entrance halls, double parlors, theaters, auditoriums, and important industrial or commercial spaces.

#### Interior Features and Finishes

*Identifying, retaining, and preserving* interior features and finishes from the restoration period. These include columns, cornices, baseboards, fireplaces and mantels, panelling, light fixtures, hardware, and flooring; and wallpaper, plaster, paint, and finishes such as stencilling, marbling, and graining; and other decorative materials that accent interior features and provide color, texture, and patterning to walls, floors, and ceilings.

*Protecting and maintaining* masonry, wood, and architectural metals that comprise restoration period interior features through appropriate surface treatments such as cleaning, rust removal, limited paint removal, and reapplication of protective coating systems.

## Restoration

### Not Recommended

Altering a floor plan or interior spaces—including individual rooms—from the restoration period.

Altering features or finishes from the restoration period.

Failing to properly document spaces, features, and finishes from the restoration period which may result in their loss.

Applying paint, plaster, or other finishes to surfaces unless the work can be substantiated historical documentation.

Stripping paint to bare wood rather than repairing or reapplying grained or marbled finishes from the restoration period to features such as doors and panelling.

Changing the type of finish or its color, such as painting a previously varnished wood feature, unless the work can be substantiated by historical documentation.

Failing to provide adequate protection to materials on a cyclical basis so that deterioration of interior features results.

## Restoration

### Recommended

Protecting interior spaces, features and finishes against arson and vandalism before project work begins, erecting protective fencing, boarding-up windows, and installing fire alarm systems that are keyed to local protection agencies.

Protecting interior features such as a staircase, mantel, or decorative finishes and wall coverings against damage during project work by covering them with heavy canvas or plastic sheets.

Installing protective coverings in areas of heavy pedestrian traffic to protect historic features such as wall coverings, parquet flooring and panelling.

Removing damaged or deteriorated paints and finishes to the next sound layer using the gentlest method possible, then repainting or refinishing using compatible paint or other coating systems based on historical documentation.

Repainting with colors that are documented to the building's restoration period.

Limiting abrasive cleaning methods to certain industrial warehouse buildings where the interior masonry or plaster features do not have distinguishing design, detailing, tooling, or finishes; and where wood features are not finished, molded, beaded, or worked by hand. Abrasive cleaning should only be considered after other, gentler methods have been proven ineffective.

Evaluating the existing condition of materials to determine whether more than protection and maintenance are required, that is, if repairs to interior features and finishes will be necessary.

### Not Recommended

Permitting entry into historic buildings through unsecured or broken windows and doors so that the interior features and finishes are damaged by exposure to weather or vandalism.

Stripping interiors of restoration period features such as woodwork, doors, windows, light fixtures, copper piping, radiators; or of decorative materials.

Failing to provide proper protection of interior features and finishes during work so that they are gouged, scratched, dented, or otherwise damaged.

Failing to take new use patterns into consideration so that interior features and finishes are damaged.

Using destructive methods such as propane or butane torches or sandblasting to remove paint or other coatings. These methods can irreversibly damage the historic materials that comprise interior features.

Using new paint colors that are inappropriate to the building's restoration period.

Changing the texture and patina of features from the restoration period through sandblasting or use of abrasive methods to remove paint, discoloration or plaster. This includes both exposed wood (including structural members) and masonry.

Failing to undertake adequate measures to assure the protection of interior features and finishes.




## Restoration

### Recommended

Repairing interior features and finishes from the restoration period by reinforcing the historic materials. Repair will also generally include the limited replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of repeated features when there are surviving prototypes such as stairs, balustrades, wood panelling, columns; or decorative wall coverings or ornamental tin or plaster ceilings. The new work should be unobtrusively dated to guide future research and treatment.

Replacing in kind an entire interior feature or finish from the restoration period that is too deteriorated to repair—if the overall form and detailing are still evident—using the physical evidence as a model for reproduction. Examples could include wainscoting, a tin ceiling, or interior stairs. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.



A complete paint investigation often needs to be conducted during Restoration. Paint samples are carefully collected onsite. In the laboratory an ultra violet light is used to identify pigment and binding media. Paint samples are then photographed. Physical evidence documented through laboratory research provides a sound basis for an accurate restoration of painted finishes, such as the complex stucco ceiling pictured here. Photo left: Courtesy Alexis Elton; Photo right: Courtesy Andrew Gilmore.

### Not Recommended

Replacing an interior feature from the restoration period such as a staircase, panelled wall, parquet floor, or cornice; or finish such as a decorative wall covering or ceiling when repair of materials and limited replacement of such parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts or portions of the interior feature or finish or that is physically or chemically incompatible.

Removing a feature or finish from the restoration period that is unrepairable and not replacing it; or failing to document the new work.



## Restoration

The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic interior spaces, features, and finishes that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing interior spaces, features, and finishes from the restoration period using all new materials.

### Recommended

#### Removing Existing Features from Other Historic Periods

Removing or altering interior spaces, features and finishes from other historic periods such as a later suspended ceiling or wood panelling.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

#### Re-creating Missing Features from the Restoration Period

Re-creating an interior space, or a missing feature or finish from the restoration period based on physical or documentary evidence; for example, duplicating a marbleized mantel or a staircase.

### Not Recommended

Failing to remove or alter an interior space, feature, or finish from another period, thus confusing the depiction of the building's significance.

Failing to document interior spaces, features, and finishes from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing an interior space, feature, or finish that was part of the original design for the building but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.



The missing plaster cornice was restored as part of an overall project to return a residence to its original appearance. The traditional method of producing a cornice is unchanged today. Photo: Old-House Journal.

## Restoration

### Building Interior

#### Mechanical Systems: Heating, Air Conditioning, Electrical, and Plumbing

##### Recommended

*Identifying, retaining, and preserving* visible features of mechanical systems from the restoration period such as radiators, vents, fans, grilles, plumbing fixtures, switchplates, and lights.

*Protecting and maintaining* mechanical, plumbing, and electrical systems and their features from the restoration period through cyclical cleaning and other appropriate measures.

Preventing accelerated deterioration of mechanical systems by providing adequate ventilation of attics, crawlspaces, and cellars so that moisture problems are avoided.

Improving the energy efficiency of existing mechanical systems to help reduce the need for elaborate new equipment.

*Repairing* mechanical systems from the restoration period by augmenting or upgrading system parts, such as installing new pipes and ducts; rewiring; or adding new compressors or boilers.

*Replacing* in kind—or with compatible substitute material—those visible features of restoration period mechanical systems that are either extensively deteriorated or are prototypes such as ceiling fans, switchplates, radiators, grilles, or plumbing fixtures.

Installing a new mechanical system, if required, in a way that results in the least alteration possible to the building.

##### Not Recommended

Altering visible decorative features of mechanical systems from the restoration period.

Failing to properly document mechanical systems and their visible decorative features from the restoration period which may result in their loss.

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of mechanical systems and their visible features results.

Enclosing mechanical systems in areas that are not adequately ventilated so that deterioration of the systems results.

Installing unnecessary air conditioning or climate control systems which can add excessive moisture to the building. This additional moisture can either condense inside, damaging interior surfaces, or pass through interior walls to the exterior, potentially damaging adjacent materials as it migrates.

Replacing a mechanical system from the restoration period or its functional parts when it could be upgraded and retained.

Installing a visible replacement feature that does not convey the same visual appearance.

Installing a new mechanical system so that structural or interior features from the restoration period are altered.

## Restoration

##### Recommended

Providing adequate structural support for new mechanical equipment.

Installing the vertical runs of ducts, pipes, and cables in closets, service rooms, and wall cavities.

Installing air conditioning units in such a manner that features are not damaged or obscured and excessive moisture is not generated that will accelerate deterioration of historic materials.

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic mechanical systems and features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing mechanical systems and features from the restoration period using all new materials.*

##### Not Recommended

Failing to consider the weight and design of new mechanical equipment so that, as a result, historic structural members or finished surfaces are weakened or cracked.

Installing vertical runs of ducts, pipes, and cables in places where they will obscure features from the restoration period.

Concealing mechanical equipment in walls or ceilings in a manner that requires the removal of building material from the restoration period.

Cutting through features such as masonry walls in order to install air conditioning units.

##### Recommended

###### Removing Existing Features from Other Historic Periods

Removing or altering mechanical systems and features from other historic periods such as a later elevator or plumbing fixture.

Documenting materials and features dating from other periods prior to their alteration or removal. If possible, selected examples of these features or materials should be stored to facilitate future research.

###### Re-creating Missing Features from the Restoration Period

Re-creating a missing feature of the mechanical system that existed during the restoration period based on physical or documentary evidence; for example, duplicating a heating vent or gaslight fixture.

##### Not Recommended

Failing to remove a mechanical system or feature from another period, thus confusing the depiction of the building's significance.

Failing to document mechanical systems and features from other historic periods that are removed from the building so that a valuable portion of the historic record is lost.

Constructing a mechanical system or feature that was part of the original design for the building but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Building Site

### Recommended

Identifying, retaining, and preserving restoration period buildings and their features as well as features of the site. Site features may include circulation systems such as walks, paths, roads, or parking; vegetation such as trees, shrubs, fields, or herbaceous plant material; landforms such as terracing, berms or grading; furnishings such as lights, fences, or benches; decorative elements such as sculpture, statuary or monuments; water features including fountains, streams, pools, or lakes; and subsurface archeological features which are important in defining the restoration period.



This ca. 1900 photograph (left) would be invaluable to guide restoration of the deteriorated house (right) to its documented earlier appearance, complete with decorative trim, shutters, polychromed exterior, and fencing. Photos: Courtesy, North Carolina Department of Archives and History.

## Restoration

### Not Recommended

Altering buildings and their features or site features from the restoration period.

Failing to properly document building and site features from the restoration period which may result in their loss.



## Restoration

### Recommended

Re-establishing the relationship between buildings and the landscape that existed during the restoration period.

*Protecting and maintaining* buildings and the site by providing proper drainage to assure that water does not erode foundation walls; drain toward the building; or damage or erode the landscape.

Minimizing disturbance of terrain around buildings or elsewhere on the site, thus reducing the possibility of destroying or damaging important landscape features or archeological resources.

Surveying and documenting areas where the terrain will be altered during restoration work to determine the potential impact to landscape features or archeological resources.

Protecting, e.g., preserving in place, important archeological resources.

Planning and carrying out any necessary investigation using professional archeologists and modern archeological methods when preservation in place is not feasible.

Preserving important landscape features from the restoration period, including ongoing maintenance of historic plant material.

Protecting building and landscape features against arson and vandalism before restoration work begins, i.e., erecting protective fencing and installing alarm systems that are keyed into local protection agencies.

### Not Recommended

Retaining non-restoration period buildings or landscape features.

Failing to maintain adequate site drainage so that buildings and site features are damaged or destroyed; or alternatively, changing the site grading so that water no longer drains properly.

Introducing heavy machinery into areas where it may disturb or damage important landscape features or archeological resources.

Failing to survey the building site prior to beginning restoration work which results in damage to, or destruction of, landscape features or archeological resources.

Leaving known archeological material unprotected so that it is damaged during restoration work.

Permitting unqualified personnel to perform data recovery on archeological resources so that improper methodology results in the loss of important archeological material.

Allowing restoration period landscape features to be lost or damaged due to a lack of maintenance.

Permitting the property to remain unprotected so that the building and landscape features or archeological resources are damaged or destroyed.

Removing restoration period features from the building or site such as wood siding, iron fencing, masonry balustrades, or plant material.



## Restoration

### Recommended

Providing continued protection of building materials and plant features from the restoration period through appropriate cleaning, rust removal, limited paint removal, and re-application of protective coating systems; and pruning and vegetation management.

Evaluating the existing condition of materials and features to determine whether more than protection and maintenance are required, that is, if repairs to building and site features will be necessary.

*Repairing* restoration period features of the building and site by reinforcing historic materials. The new work should be unobtrusively dated to guide future research and treatment.

*Replacing* in kind an entire restoration period feature of the building or site that is too deteriorated to repair if the overall form and detailing are still evident. Physical evidence from the deteriorated feature should be used as a model to guide the new work. This could include an entrance or porch, walkway, or fountain. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

Replacing deteriorated or damaged landscape features of the restoration period in kind or with compatible substitute material. The replacement feature should be based on physical evidence and convey the same appearance.

### Not Recommended

Failing to provide adequate protection of materials on a cyclical basis so that deterioration of building and site features results.

Failing to undertake adequate measures to assure the protection of building and site features.

Replacing an entire restoration period feature of the building or site such as a fence, walkway, or driveway when repair of materials and limited compatible replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the building or site feature or that is physically or chemically incompatible.

Removing a restoration period feature of the building or site that is unrepairable and not replacing it; or failing to document the new work.

Adding conjectural landscape features to the site such as period reproduction lamps, fences, fountains, or vegetation that are historically inappropriate, thus creating an inaccurate depiction of the restoration period.

## Restoration

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing historic building site features that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing building site features from the restoration period using all new materials.*

Recommended	Not Recommended
<b>Removing Existing Features from Other Historic Periods</b> Removing or altering features of the building or site from other <u>historic</u> periods such as a later outbuilding, paved road, or overgrown tree. Documenting features of the building or site from other periods prior to their alteration or removal.	Failing to remove a feature of the building or site from another period, thus creating an inaccurate historic appearance. Failing to document features of the building or site from other historic periods that are removed during restoration so that a valuable portion of the historic record is lost.
<b>Re-creating Missing Features from the Restoration Period</b> Re-creating a missing feature of the building or site that existed during the restoration period based on physical or documentary evidence; for example, duplicating a terrace, gazebo, or fencing.	Constructing a feature of the building or site that was part of the original design, but was never actually built; or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Restoration

## Restoration

### Setting (District/Neighborhood)

#### Recommended

*Identifying retaining, and preserving* restoration period building and landscape features of the setting. Such features can include roads and streets, furnishings such as lights or benches, vegetation, gardens and yards, adjacent open space such as fields, parks, commons or woodlands, and important views or visual relationships.

Re-establishing the relationship between buildings and landscape features of the setting that existed during the restoration period.

*Protecting and maintaining* building materials and plant features from the restoration period through appropriate cleaning, rust removal, limited paint removal, and reapplication of protective coating systems; and pruning and vegetation management.

Protecting buildings and landscape features against arson and vandalism before restoration work begins by erecting protective fencing and installing alarm systems that are keyed into local protection agencies.

Evaluating the existing condition of the building and landscape features to determine whether more than protection and maintenance are required, that is, if repairs to features will be necessary.

*Repairing* restoration period features of the building and landscape by reinforcing the historic materials. Repair will generally include the replacement in kind—or with compatible substitute material—of those extensively deteriorated or missing parts of features where there are surviving prototypes such as porch balustrades or paving materials. The new work should be unobtrusively dated to guide future research and treatment.

#### Not Recommended

Altering features of the setting that can be documented to the restoration period.

Failing to properly document restoration period building and landscape features, which may result in their loss.

Retaining non-restoration period buildings or landscape features.

Failing to provide adequate protection of materials on a cyclical basis which results in the deterioration of building and landscape features.

Permitting the building and setting to remain unprotected so that interior or exterior features are damaged.

Stripping or removing features from buildings or the setting such as wood siding, iron fencing, terra cotta balustrades, or plant material.

Failing to undertake adequate measures to assure the protection of building and landscape features.

Replacing an entire restoration period feature of the building or landscape setting when repair of materials and limited replacement of deteriorated or missing parts are appropriate.

Using a substitute material for the replacement part that does not convey the visual appearance of the surviving parts of the building or landscape, or that is physically, chemically, or ecologically incompatible.

#### Recommended

*Replacing* in kind an entire restoration period feature of the building or landscape that is too deteriorated to repair—when the overall form and detailing are still evident—using the physical evidence as a model to guide the new work. If using the same kind of material is not technically or economically feasible, then a compatible substitute material may be considered. The new work should be unobtrusively dated to guide future research and treatment.

*The following Restoration work is highlighted to indicate that it involves the removal or alteration of existing features of the historic setting that would be retained in Preservation and Rehabilitation treatments; and the replacement of missing features from the restoration period using all new materials.*

#### Not Recommended

Removing a restoration period feature of the building or landscape that is unrepairable and not replacing it; or failing to document the new work.

#### Recommended

##### Removing Existing Features from Other Historic Periods

Removing or altering features of the building or landscape from other historic periods, such as a later road, sidewalk, or fence.

Documenting features of the building or landscape dating from other periods prior to their alteration or removal.

##### Re-creating Missing Features from the Restoration Period

Re-creating a missing feature of the building or landscape in the setting that existed during the restoration period based on physical or documentary evidence; for example, duplicating a path or park bench.

#### Not Recommended

Failing to remove a feature of the building or landscape from another period, thus creating an inaccurate historic appearance.


Failing to document features of the building or landscape from other historic periods that are removed from the setting so that a valuable portion of the historic record is lost.

Constructing a feature of the building or landscape that was part of the original design for the setting but was never actually built, or constructing a feature which was thought to have existed during the restoration period, but for which there is insufficient documentation.

## Restoration



*The Bronson-Mulholland House in Pula, Florida, ca. 1845, is shown (a) before and (b) after the treatment. Restoration. Over the years the east (far right) side of the veranda had been filled in as a sixth bay. During the restoration, this later infill was removed and the east veranda, together with its flooring, stairs, and foundation, restored. Photo: City of Pula, Community Development Department.*

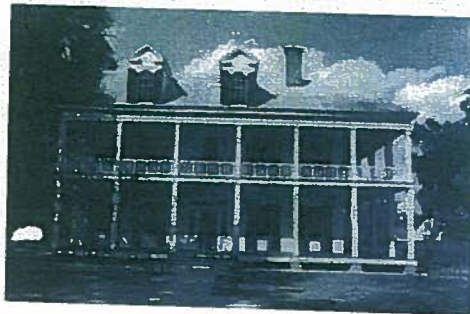

Setting 159

## Restoration

*Although the work in the following sections is quite often an important aspect of restoration projects, it is usually not part of the overall process of preserving features from the restoration period (protection, stabilization, conservation, repair, and replacement); rather, such work is assessed for its potential negative impact on the building's historic appearance. For this reason, particular care must be taken not to obscure, alter, or damage features from the restoration period in the process of undertaking work to meet code and energy efficiency.*

### Energy Efficiency

#### Recommended

##### Masonry/Wood/Architectural Metals

Installing thermal insulation in attics and in unheated cellars and crawlspaces to increase the efficiency of the existing mechanical systems.

Installing insulating material on the inside of masonry walls to increase energy efficiency where there is no interior molding around the windows or other interior architectural detailing from the restoration period.

##### Windows

Utilizing the inherent energy conserving features of a building by maintaining windows and louvered blinds from the restoration period in good operable condition for natural ventilation.

Improving thermal efficiency with weatherstripping, storm windows, caulking, interior shades, and if historically appropriate, blinds and awnings.

Installing interior storm windows with air-tight gaskets, ventilating holes, and/or removable clips to ensure proper maintenance and to avoid condensation damage to historic windows.

Installing exterior storm windows which do not damage or obscure the windows and frames.

#### Not Recommended

Applying thermal insulation with a high moisture content in wall cavities which may damage historic fabric.

Installing wall insulation without considering its effect on interior or other architectural detailing.

Using shading devices that are inappropriate to the restoration period.

Replacing multi-paned sash from the restoration period with new thermal sash utilizing false muntins.

Installing interior storm windows that allow moisture to accumulate and damage the window.

Installing new exterior storm windows which are inappropriate in size or color.

Replacing windows or transoms from the restoration period with fixed thermal glazing or permitting windows and transoms to remain inoperable rather than utilizing them for their energy conserving potential.

160 Energy Efficiency

## Restoration

### *Recommended*

#### *Entrances and Porches*

Maintaining porches and double vestibule entrances from the restoration period so that they can retain heat or block the sun and provide natural ventilation.

#### *Interior Features*

Retaining interior shutters and transoms from the restoration period for their inherent energy conserving features.

#### *Mechanical Systems*

Improving energy efficiency of existing mechanical systems by installing insulation in attics and basements.

#### *Building Site*

Retaining plant materials, trees, and landscape features which perform passive solar energy functions, such as sun shading and wind breaks, if appropriate to the restoration period.

#### *Setting (District/Neighborhood)*

Maintaining those existing landscape features which moderate the effects of the climate on the setting such as deciduous trees, evergreen wind-blocks, and lakes or ponds, if appropriate to the restoration period.

### *Not Recommended*

Changing porches significant to the restoration period by enclosing them.

Removing interior features from the restoration period that play a secondary energy conserving role.

Replacing existing mechanical systems that could be repaired for continued use.

Removing plant materials, trees, and landscape features from the restoration period that perform passive solar energy functions.

Stripping the setting of landscape features and landforms from the restoration period so that effects of the wind, rain, and sun result in accelerated deterioration of the historic building.

## Restoration

### Accessibility Considerations

#### *Recommended*

Identifying spaces, features, and finishes from the restoration period so that accessibility code-required work will not result in their damage or loss.

Complying with barrier-free access requirements in such a manner that spaces, features, and finishes from the restoration period are preserved.

Working with local disability groups, access specialists, and historic preservation specialists to determine the most appropriate solution to access problems.

Providing barrier-free access that promotes independence for to the highest degree practicable, while preserving significant historic features.

Finding solutions to meet accessibility requirements that minimize the impact on the historic building and its site, such as compatible ramps, paths, and lifts.

#### *Not Recommended*

Undertaking code-required alterations before identifying those spaces, features, or finishes from the restoration period which must be preserved.

Altering, damaging, or destroying features from the restoration period in attempting to comply with accessibility requirements.

Making changes to buildings without first seeking expert advice from access specialists and historic preservationists to determine solutions.

Making access modifications that do not provide a reasonable balance between independent, safe access and preservation of historic features.

Making modifications for accessibility without considering the impact on the historic building and its site.



## Restoration

### Health and Safety Considerations

#### *Recommended*

Identifying spaces, features, and finishes from the restoration period so that code-required work will not result in their damage or loss.

Complying with health and safety codes, including seismic code requirements, in such a manner that spaces, features, and finishes from the restoration period are preserved.

Removing toxic building materials only after thorough testing has been conducted and only after less invasive abatement methods have been shown to be inadequate.

Providing workers with appropriate personal protective equipment for hazards found at the worksite.

Working with local code officials to investigate systems, methods, or devices of equivalent or superior effectiveness and safety to those prescribed by code so that unnecessary alterations can be avoided.

Upgrading historic stairways and elevators from the restoration period to meet health and safety codes in a manner that assures their preservation, i.e., so that they are not damaged or obscured.

Installing sensitively designed fire suppression systems, such as sprinkler systems, that result in retention of features and finishes from the restoration period.

Applying fire-retardant coatings, such as intumescent paints, which expand during fire to add thermal protection to steel.

Adding a new stairway or elevator to meet health and safety codes in a manner that preserves adjacent features and spaces from the restoration period.

#### *Not Recommended*

Undertaking code-required alterations to a building or site before identifying those spaces, features, or finishes from the restoration period which must be preserved.

Altering, damaging, or destroying spaces, features, and finishes while making modifications to a building or site to comply with safety codes.

Destroying interior features and finishes from the restoration period without careful testing and without considering less invasive abatement methods.

Removing unhealthful building materials without regard to personal and environmental safety.

Making changes to historic buildings without first exploring equivalent health and safety systems, methods, or devices that may be less damaging to spaces, features, and finishes from the restoration period.

Damaging or obscuring stairways and elevators or altering adjacent spaces from the restoration period in the process of doing work to meet code requirements.


Covering wood features from the restoration period with fire-resistant sheathing which results in altering their visual appearance.

Using fire-retardant coatings if they damage or obscure features from the restoration period.

Altering the appearance of spaces, features, or finishes from the restoration period when adding a new code-required stairway or elevator.

## Standards for Reconstruction & Guidelines for Reconstructing Historic Buildings

*Reconstruction is defined as the act or process of depicting, by means of new construction, the form, features, and detailing of a non-surviving site, landscape, building, structure, or object for the purpose of replicating its appearance as a specific period of time and in its historic location.*

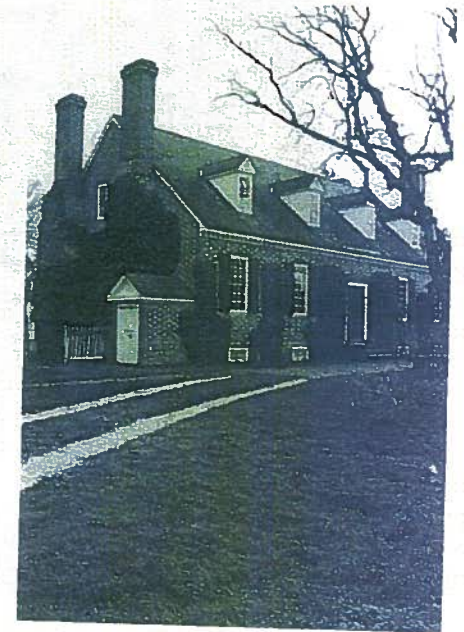

#### Standards for Reconstruction


1. Reconstruction will be used to depict vanished or non-surviving portions of a property when documentary and physical evidence is available to permit accurate reconstruction with minimal conjecture, and such reconstruction is essential to the public understanding of the property.
2. Reconstruction of a landscape, building, structure, or object in its historic location will be preceded by a thorough archeological investigation to identify and evaluate those features and artifacts which are essential to an accurate reconstruction. If such resources must be disturbed, mitigation measures will be undertaken.
3. Reconstruction will include measures to preserve any remaining historic materials, features, and spatial relationships.
4. Reconstruction will be based on the accurate duplication of historic features and elements substantiated by documentary or physical evidence rather than on conjectural designs or the availability of different features from other historic properties. A reconstructed property will re-create the appearance of the non-surviving historic property in materials, design, color, and texture.
5. A reconstruction will be clearly identified as a contemporary re-creation.
6. Designs that were never executed historically will not be constructed.

#### Guidelines for Reconstructing Historic Buildings

##### Introduction

Whereas the treatment Restoration provides guidance on restoring—or re-creating—building features, the Standards for Reconstruction and Guidelines for Reconstructing Historic Buildings address those aspects of treatment necessary to re-create an entire non-surviving building with new material. Much like restoration, the goal is to make the building appear as

it did at a particular—and most significant—time in its history. The difference is, in Reconstruction, there is far less extant historic material prior to treatment and, in some cases, nothing visible. Because of the potential for historical error in the absence of sound physical evidence, this treatment can be justified only rarely and, thus, is the least frequently undertaken. Documentation requirements prior to and following work are very stringent. Measures should be taken to preserve extant historic surface and subsurface material. Finally, the reconstructed building must be clearly identified as a contemporary re-creation.

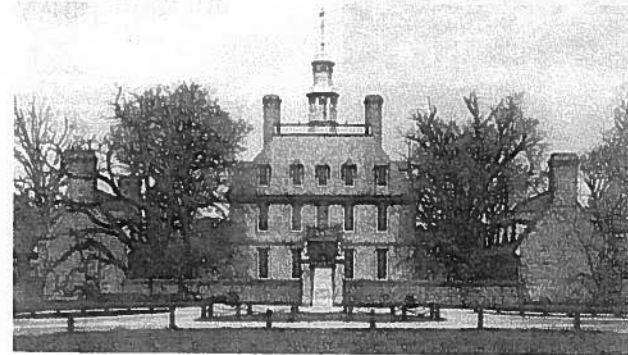

In the 1930s reconstruction of the 18th century Governor's Palace at Colonial Williamsburg, Virginia, the archeological remains of the brick foundation were carefully preserved in situ, and serve as a base for the reconstructed walls. Photo: The Colonial Williamsburg Foundation.

### Research and Document Historical Significance

Guidance for the treatment Reconstruction begins with *researching and documenting* the building's historical significance to ascertain that its re-creation is essential to the public understanding of the property. Often, another extant historic building on the site or in a setting can adequately explain the property, together with other interpretive aids. Justifying a reconstruction requires detailed physical and documentary evidence to minimize or eliminate conjecture and ensure that the reconstruction is as accurate as possible. Only one period of significance is generally identified; a building, as it evolved, is rarely re-created. During this important fact-finding stage, if research does not provide adequate documentation for an accurate reconstruction, other interpretive methods should be considered, such as an explanatory marker.

### Investigate Archeological Resources

*Investigating* archeological resources is the next area of guidance in the treatment Reconstruction. The goal of physical research is to identify features of the building and site which are essential to an accurate re-creation and must be reconstructed, while leaving those archeological resources that are not essential, undisturbed. Information that is not relevant to the project should be preserved in place for future research. The archeological findings, together with archival documentation, are then used to replicate the plan of the building, together with the relationship and size of rooms, corridors, and other spaces, and spatial relationships.

### Identify, Protect and Preserve Extant Historic Features

Closely aligned with archeological research, recom-

mendations are given for *identifying, protecting, and preserving* extant features of the historic building. It is never appropriate to base a Reconstruction upon conjectural designs or the availability of different features from other buildings. Thus, any remaining historic materials and features, such as remnants of a foundation or chimney and site features such as a walkway or path, should be retained, when practicable, and incorporated into the reconstruction. The historic as well as new material should be carefully documented to guide future research and treatment.

### Reconstruct Non-Surviving Building and Site

After the research and documentation phases, guidance is given for Reconstruction work itself. Exterior and interior features are addressed in general, always emphasizing the need for an accurate *depiction*, i.e., careful duplication of the appearance of historic interior paints, and finishes such as stencilling, marbling, and graining. In the absence of extant historic materials, the objective in reconstruction is to re-create the appearance of the historic building for interpretive purposes. Thus, while the use of traditional materials and finishes is always preferred, in some instances, substitute materials may be used if they are able to convey the same visual appearance.

Where non-visible features of the building are concerned—such as interior structural systems or mechanical systems—it is expected that contemporary materials and technology will be employed.

Re-creating the building site should be an integral aspect of project work. The initial archeological inventory of subsurface and aboveground remains is used as documentation to reconstruct landscape features such as walks and roads, fences, benches, and fountains.

### Energy Efficiency/Accessibility/Health and Safety Code Considerations

Code requirements must also be met in Reconstruction projects. For code purposes, a reconstructed building may be considered as essentially new construction. Guidance for these sections is thus abbreviated, and focuses on achieving design solutions that do not destroy extant historic features and materials or obscure reconstructed features.

*Reconstruction as a Treatment.* When a contemporary depiction is required to understand and interpret a property's historic value (including the re-creation of missing components in a historic district or site); when no other property with the same associative value has survived; and when sufficient historical documentation exists to ensure an accurate reproduction, Reconstruction may be considered as a treatment. Prior to undertaking work, a documentation plan for Reconstruction should be developed.



Reconstruction should generally be based on an extensive archeological investigation, as was done here to re-create a non-surviving commissary building at Fort Snelling.



## Reconstruction

### Recommended

*Researching and documenting* the property's historical significance, focusing on the availability of documentary and physical evidence needed to justify reconstruction of the non-surviving building.

*Investigating* archeological resources to identify and evaluate those features and artifacts which are essential to the design and plan of the building.



### Not Recommended

Undertaking a reconstruction based on insufficient research, so that, as a result, an historically inaccurate building is created.

Reconstructing a building unnecessarily when an existing building adequately reflects or explains the history of the property, the historical event, or has the same associative value.

Executing a design for the building that was never constructed historically.

Failing to identify and evaluate archeological information prior to reconstruction, or destroying extant historical information not relevant to the reconstruction but which should be preserved in place.

*Joan Baptiste Wenger's watercolor rendering of Fort Snelling, Minnesota, in 1857, is artistically pleasing, but the overall view does not constitute adequate documentary evidence for a Reconstruction. Oral histories are also unreliable sources of documentation for treatment.*

## Reconstruction

### Recommended

Minimizing disturbance of terrain to reduce the possibility of destroying archeological resources.

*Identifying, retaining, and preserving* extant historic features of the building and site, such as remnants of a foundation, chimney, or walkway.



### Not Recommended

Introducing heavy machinery or equipment into areas where it may disturb archeological resources.

Beginning reconstruction work without first conducting a detailed site investigation to physically substantiate the documentary evidence.

Basing a reconstruction on conjectural designs or the availability of different features from other historic buildings.



*(a) and (b). Two photos illustrate the use of contemporary construction materials and techniques within the treatment, Reconstruction. Because Reconstruction is employed to portray a significant earlier time, usually for interpretive purposes, substitute materials may be appropriate if they are able to convey the historic appearance.*

## Reconstruction

### *Recommended*

#### Building Exterior

Reconstructing a non-surviving building to depict the documented historic appearance. Although traditional building materials such as masonry, wood, and architectural metals are preferable, substitute materials may be used as long as they re-create the historical appearance.

Re-creating the documented design of exterior features such as the roof shape and coverings; architectural detailing; windows; entrances and porches; steps and doors; and their historic spatial relationships and proportions.

Reproducing the appearance of historic paint colors and finishes based on physical and documentary evidence.

Using signs to identify the building as a contemporary recreation.

#### Building Interior

Re-creating the appearance of *visible* features of the historical structural system, such as post and beam systems, trusses, summer beams, vigas, cast iron columns, above-grade stone foundations, or loadbearing brick or stone walls. Substitute materials may be used for unexposed structural features if they were not important to the historic significance of the building.

Re-creating a historic floor plan or interior spaces, including the size, configuration, proportion, and relationship of rooms and corridors; the relationship of features to spaces; and the spaces themselves.

### *Not Recommended*

Reconstructing features that cannot be documented historically or for which inadequate documentation exists.

Using substitute materials that do not convey the appearance of the historic building.

Omitting a documented exterior feature; or re-building a feature, but altering its historic design.

Using inappropriate designs or materials that do not convey the historic appearance, such as aluminum storm and screen window combinations.

Using paint colors that cannot be documented through research and investigation to be appropriate to the building or using other undocumented finishes.

Failing to explain that the building is a reconstruction, thus confusing the public understanding.

Changing the documented appearance of visible features of the structural system.

Altering the documented historic floor plan or relocating an important interior feature such as a staircase so that the historic relationship between the feature and space is inaccurately depicted.

### *Recommended*

Duplicating the documented historic appearance of the building's interior features and finishes, including columns, cornices, baseboards, fireplaces and mantels, panelling, light fixtures, hardware, and flooring; and wallpaper, plaster, paint and finishes such as stencilling, marbling and graining; and other decorative materials that accented interior features and provided color, texture, and patterning to walls, floors and ceilings.

Installing modern mechanical systems in the least obtrusive way possible, while meeting user need.

Installing the vertical runs of ducts, pipes, and cables in closets, service rooms, and wall cavities.

Installing exterior electrical and telephone cables underground, or in the least obtrusive way possible.

## Reconstruction

### *Not Recommended*

Altering the documented appearance of interior features and finishes so that, as a result, an inaccurate depiction of the historic building is created. For example, moving a feature from one area of a room to another; or changing the type or color of the finish.

Altering the historic plan or the re-created appearance unnecessarily when installing modern mechanical systems.

Installing vertical runs in ducts, pipes, and cables in places where they will intrude upon the historic depiction of the building.

Attaching exterior electrical and telephone cables to the principal elevations of the reconstructed building, unless their existence and visibility can be documented.

## Reconstruction



*The spacious grounds at Middleton Place, near Charleston, South Carolina, constitute the first landscaped garden in America. The molded terraces, originally constructed in the 18th century, were largely reconstructed in the early 20th century based on extant remains and other documentary evidence. Photo: Middleton Place.*

### Building Site

#### Recommended

Basing decisions for reconstructing building site features on the availability of documentary and physical evidence.

Inventorying the building site to determine the existence of aboveground remains and subsurface archaeological materials, then using this evidence as corroborating documentation for the reconstruction of related site features. These may include walks, paths, roads, and parking; trees, shrubs, fields or herbaceous plant material; terracing, berms, or grading; lights, fences, or benches; sculpture, statuary, or monuments; fountains, streams, pools, or lakes.

Re-establishing the historic relationship between the building or buildings and historic site features, whenever possible.

#### Not Recommended

Reconstructing building site features without first conducting a detailed investigation to physically substantiate the documentary evidence.

Giving the building's site a false appearance by basing the reconstruction or conjectural designs on the availability of features from other nearby sites.

Changing the historic spatial relationship between the building and historic site features, or reconstructing some site features, but not others, thus creating a false appearance.

## Reconstruction

### Recommended

#### Setting (District or Neighborhood)

Basing decisions for reconstructing features of the building's setting on the availability of documentary and physical evidence.

Inventorying the setting to determine the existence of aboveground remains and subsurface archaeological materials, using this evidence as corroborating documentation for the reconstruction of missing features of the setting. Such features could include roads and streets; furnishings such as lights or benches; vegetation, gardens and yards; adjacent open space such as fields, parks, commons or woodlands; and important views or visual relationships.

Re-establishing the historic spatial relationship between buildings and landscape features of the setting.

### Not Recommended

Reconstructing features of the setting without first conducting a detailed investigation to physically substantiate the documentary evidence.

Giving the building's setting a false appearance by basing the reconstruction on conjectural designs or the availability of features from other nearby districts or neighborhoods.

Confusing the historic spatial relationship between buildings and landscape features within the setting by reconstructing some missing elements, but not others.



*(a) and (b). Two views of the Officers' Quarters at Fort Snelling (ca. 1885 to 1900) not only provide information on the materials and form of the historic block, they document the wooden walkways and other landscape features such as stairs, railings, and tree placement. Historical and pictorial evidence would need to be combined with specific physical evidence in order to make the case for Reconstruction as a treatment.*

## Reconstruction



*The 1778 Kershaw House, which served as British Headquarters during the Revolutionary War, was burned by Union troops in 1865. In the early 1970s, the house was reconstructed as part of Camden Battlefield, Camden, South Carolina. Built expressly for interpretive purposes, it serves as an illustrative reminder of a past event of national significance. The Standards for Reconstruction call for any re-created building to be clearly identified as a contemporary depiction. This is most often done by means of an exterior sign or plaque, or through an explanatory brochure or exhibit. A guide may inform visitors as well. Photo: Richard Frenn.*

## Reconstruction

*Whereas preservation, rehabilitation, and restoration treatments usually necessitate retrofitting to meet code and energy requirements, in this treatment it is assumed that the reconstructed building will be essentially new construction. Thus, only minimal guidance is provided in the following section, although the work must still be assessed for its potential negative impact on the reconstructed*

### Recommended

#### Energy Efficiency

Installing thermal insulation, where appropriate, as part of the reconstruction.

Utilizing the inherent energy conserving features of windows and blinds, porches and double vestibule entrances in a reconstruction project.

Utilizing plant materials, trees, and landscape features, especially those which perform passive solar energy functions such as sun shading and wind breaks, when appropriate to the reconstruction.

#### Accessibility Considerations

Taking accessibility requirements into consideration early in the planning stage so that barrier-free access can be provided in a way that is compatible with the reconstruction.

#### Health and Safety Considerations

Considering health and safety code requirements, such as the installation of fire suppression systems, early in the planning stage of the project so that the work is compatible with the reconstruction.

### Not Recommended

Installing thermal insulation with a high moisture content.

Using windows and shading devices that are inappropriate to the reconstruction.

Installing new thermal sash with false muntins instead of using sash that is appropriate to the reconstruction.

Removing plant materials and landscape features which perform passive energy functions if they are appropriate to the reconstruction.

Obscuring or damaging the appearance of the reconstructed building in the process of providing barrier-free access.

Meeting health and safety requirements without considering their visual impact on the reconstruction.